




F816e+

Radial Truck Tire (Regional All Position)

- 1.Good handling.
- 2.Low fuel consumption.
- 3.Certified by U.S.A SmartWay.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



D900

Radial Truck Tire (Regional Drive)

- 1.New technology for tire weight is reduced.
- 2.Low eccentric wear.
- 3.Low fuel consumption.
- 4.Good braking and grip on the road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	17.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB



LLF02e+

Radial Truck Tire (Regional All Position)

- 1.Good handling.
- 2.Low fuel consumption.
- 3.Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	14.5	TRA
315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	14.5	TRA



T810e+

Radial Truck Tire (Regional Trailer)

- 1.Low fuel consumption.
- 2.Certified by U.S.A SmartWay.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1050	279	10	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1050	279	10	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10	TRA



LAL800e+

Radial Truck Tire (Regional All Position)

- 1.Good handling.
- 2.Low fuel consumption.
- 3.Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.0	TRA



LLA18e+

Radial Truck Tire (Regional Trailer)

- 1.Low fuel consumption.
- 2.Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/65R22.5	18	158	K	11.75	--	--	4250	830	1072	389	16.5	TRA



On&Off Road



KMA400

Radial Truck Tire (On&Off Road)

Suitable for all position axle of trucks under all kinds of working conditions.
1.Thick sidewall design protect against sidewall impacts and bruises.
2.Stone rejection design protect groove bottom from stone puncture.
3.Lasting grip and stability,with M+S and 3PMSF marking.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.25R20	14	136/134	K	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	K	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	16.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	19.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	19.0	GB
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	19.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	19.0	ETRTO



KMD400

Radial Truck Tire (On&Off Road)

Suitable for drive axle of trucks under all kinds of working conditions.
1.Thick sidewall design protect against sidewall impacts and bruises.
2.Stone rejection design protect groove bottom from stone puncture.
3.Lasting grip and stability,with M+S and 3PMSF marking.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	21.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	21.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



KMD402

Radial Truck Tire (On&Off Road)

Suitable for drive axle of trucks under all kinds of working conditions.
1.Thick sidewall design protect against sidewall impacts and bruises.
2.Stone rejection design protect groove bottom from stone puncture.
3.Lasting grip and stability.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	22.5	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	22.5	ETRTO



KMA40

Radial Truck Tire (On&Off Road)

Suitable for all position axle of trucks under all kinds of working conditions.
1.Chip,cut and abrasion resistance tread compound.
2.Stone rejection design protect groove bottom from stone puncture
3.Deep tread depth increases mileage and service life.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	18.3	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	18.3	TRA



KXA400

Radial Truck Tire (On&Off Road)

Suitable for trailer and steer axle of trucks under all kinds of working conditions.
1.Thick sidewall design protect against sidewall impacts and bruises.
2.Stone rejection design protect groove bottom from stone puncture.
3.Lasting grip and stability,with M+S and 3PMSF marking.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/65R22.5	18	158	L	11.75	--	--	4250	850	1072	389	18.0	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	18.0	ETRTO
385/65R22.5	24	164	J	11.75	--	--	5000	900	1072	389	18.0	ETRTO
425/65R22.5	20	165	K	13.00	--	--	5150	825	1124	430	18.5	ETRTO



KMD401

Radial Truck Tire (On&Off Road)

Suitable for drive axle of trucks under all kinds of working conditions.
1.Chip,cut and abrasion resistance tread compound.
2.Stone rejection design protect groove bottom from stone puncture.
3.Deep tread depth increases mileage and service life.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	20.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1054	279	20.5	ETTRO
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	22.5	TRA
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	20.5	ETTRO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	20.5	GB



KMA403

NEW

Radial Truck Tire (On&Off Road)
Suitable for all position axle of trucks under all kinds of working conditions.
1.Thick sidewall design protects against sidewall impacts and bruises.
2.Stone rejection design protects groove bottom against stone puncture.
3.HAT technology: low heat generation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	14.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	14.5	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.5	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1085	300	15.5	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	15.5	GB
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	15.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	15.5	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	15.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	15.5	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	15.5	ETRTO



KMD403

NEW

Radial Truck Tire (On&Off Road)
Suitable for drive axle of trucks under all kinds of working conditions.
1.Thick sidewall design protect against sidewall impacts and bruises.
2.Stone rejection design protect groove bottom from stone puncture.
3.HAT technology: Low heat generation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	19.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	19.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	20.0	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	19.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	19.0	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1085	300	19.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	19.0	GB
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	19.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	18.5	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	18.5	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO



LLA98

NEW

Radial Truck Tire (On&Off Road All Position)
1.Typical combined pattern.
2.Suitable for trucks of different tonnages which run on highway and normal road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.5	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO



AAR919

Radial Truck Tire (On&Off Road All Position)

- 1. Pattern block design reduces shoulder heat.
- 2. Wide running surface and higher saturation design improves the wear mileage.
- 3. Powerful traction,grip and climbing performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.50R20	12	128/126	L	6.0	1700	760	1800	760	935	215	14.5	GB
7.50R20	14	130/128	K	6.0	1800	830	1900	830	935	215	14.5	GB
8.25R20	14	136/134	K	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	K	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	16.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	19.0	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1054	279	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	18.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	18.0	GB
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	18.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	20.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	20.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	20.0	TRA
12R24.5	16	152/149	K	9.00	3250	830	3550	830	1135	300	16	TRA
12R24.5	18	154/151	K	9.00	3450	930	3750	930	1135	300	16	GB



AAR959

Radial Truck Tire (On&Off Road All Position)

- 1.Wide and deep tread grooves for long tire life.
- 2.Excellent cutting and chipping resistance.
- 3.Robust tread and high traction on rough surfaces.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.25R20	16	139/137	F	6.5	2300	930	2430	930	974	236	18.0	GB
9.00R20	16	144/142	D	7.0	2650	900	2800	900	1019	259	20.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	18.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	18.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	19.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	19.0	GB



ADR978

Radial Truck Tire (On&Off Road Drive)

- 1.Good traction.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	20.5	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	20.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



D960

Radial Truck Tire (On&Off Road Drive)

- 1.Deep and rigid block design for long life and good traction.
- 2.Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	21.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	21.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.0	TRA
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	21.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	21.0	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	21.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	21.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
9.5R17.5	14	129/127	K	6.75	1750	750	1850	750	842	240	16.0	ETRTO
9.5R17.5	18	143/141	K	6.75	2575	875	2725	875	842	240	16.0	ETRTO
265/70R19.5	16	140/138	K	7.50	2360	775	2500	775	867	262	15.5	ETRTO
265/70R19.5	18	143/141	K	7.50	2575	850	2725	850	867	262	15.5	ETRTO
275/70R22.5	16	148/145	K	8.25	2900	900	3150	900	958	276	21.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	22.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	22.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



A918

Radial Truck Tire (On&Off Road All Position)

- 1.Typical combined pattern.
- 2.Cut resistance compound.
- 3.Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	17.5	ETRTO



LLA01

Radial Truck Tire (On&Off Road all position)

- 1.Typical combined pattern.
- 2.Cut resistance compound.
- 3.Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.5	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	17.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	17.5	ETRTO
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	17.5	ETRTO



LLA58

Radial Truck Tire (On&Off Road All Position)

- 1.Typical combined pattern.
- 2.Cut resistance compound.
- 3.Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	14.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	14.5	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.5	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO



A908

Radial Truck Tire (On&Off Road All Position)

- 1. Typical combined pattern.
- 2. Cut resistance compound.
- 3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
13R22.5	18	156/150 (154/150)	G(K)	9.75	3350	875	4000	875	1124	320	17.5	ETRTO



LLD09

Radial Truck Tire (On&Off Road Drive)

- 1. Rigid block design for good traction.
- 2. Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	14.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	14.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	14.5	GB
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.5	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	16.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB



LLA08

Radial Truck Tire (On&Off Road All Position)

- 1. Typical combined pattern.
- 2. Cut resistance compound.
- 3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.50R20	12	128/126	L	6.0	1700	760	1800	760	935	215	13.5	GB
7.50R20	14	130/128	K	6.0	1800	830	1900	830	935	215	13.5	GB
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	15.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.0	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.0	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	15.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	15.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	16.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	17.0	TRA
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	17.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	17.0	ETRTO
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1054	279	15.5	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	15.5	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1054	279	15.5	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
11R24.5	14	146/143	K	8.25	2725	720	3000	720	1104	279	15.5	TRA
11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	15.5	TRA
12R24.5	16	152/149	K	9.00	3250	830	3550	830	1135	300	16.0	TRA
12R24.5	18	154/151	K	9.00	3450	930	3750	930	1135	300	16.0	GB
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	16.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	17.0	TRA



LLA68

Radial Truck Tire (On&Off Road All Position)

- 1. Typical combined pattern.
- 2. Cut resistance compound.
- 3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	15.5	GB



LLA38

Radial Truck Tire (On&Off Road Trailer)

- 1. Typical combined pattern.
- 2. Cut resistance compound.
- 3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	16.5	ETRTO
385/55R22.5	20	160	J	12.25	--	--	4500	900	996	386	16.5	ETRTO
385/65R22.5	18	158	K	11.75	--	--	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160	J	11.75	--	--	4500	900	1072	389	16.5	ETRTO
425/65R22.5	18	162	K	12.25	--	--	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	13.00	--	--	5150	825	1124	430	17.5	ETRTO
445/65R22.5	20	168	J/K	13.00	--	--	5600	830	1150	444	18.0	TRA
445/65R22.5	20	169	J	14.00	--	--	5800	900	1150	454	18.0	ETRTO



D980

Radial Truck Tire (On&Off Road Drive)

- 1. Deep and rigid block design for long life and good traction.
- 2. Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
13R22.5	18	156/150 (154/150)	G(K)	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	19.5	ETRTO



A938

Radial Truck Tire (On&Off Road Trailer)

- 1. Typical combined pattern.
- 2. Cut resistance compound.
- 3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/65R22.5	20	160(158)	J(L)	11.75	--	--	4500	900	1072	389	16.5	ETRTO



A968/LTR968*

Radial Truck Tire (On&Off Road Trailer)

- 1.Cut resistance compound.
- 2.Good braking and grip.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R15TR	12	133/131	M	7.50	1950	620	2060	620	927	278	17.5	TRA
10.00R15TR	14	137/135	L	7.50	2180	720	2300	720	927	278	17.5	TRA
10.00R15TR	16	141/139	K	7.50	2430	830	2575	830	927	278	17.5	TRA
11R17.5	12	133/131	M	8.25	1950	620	2060	620	927	279	17.5	TRA
11R17.5	14	137/135	L	8.25	2180	720	2300	720	927	279	17.5	TRA
11R17.5	16	141/139	K	8.25	2430	830	2575	830	927	279	17.5	TRA
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	17.5	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	17.5	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1054	279	17.5	ETRTO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	17.5	TRA
11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	17.5	TRA
275/70R22.5*	16	148/145	K	8.25	2900	900	3150	900	958	276	17.0	ETRTO




LLA08e+

Radial Truck Tire (On&Off Road All Position)

- 1. Typical combined pattern.
- 2. Cut resistance compound.
- 3. Good braking and grip.
- 4. Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	15.5	TRA

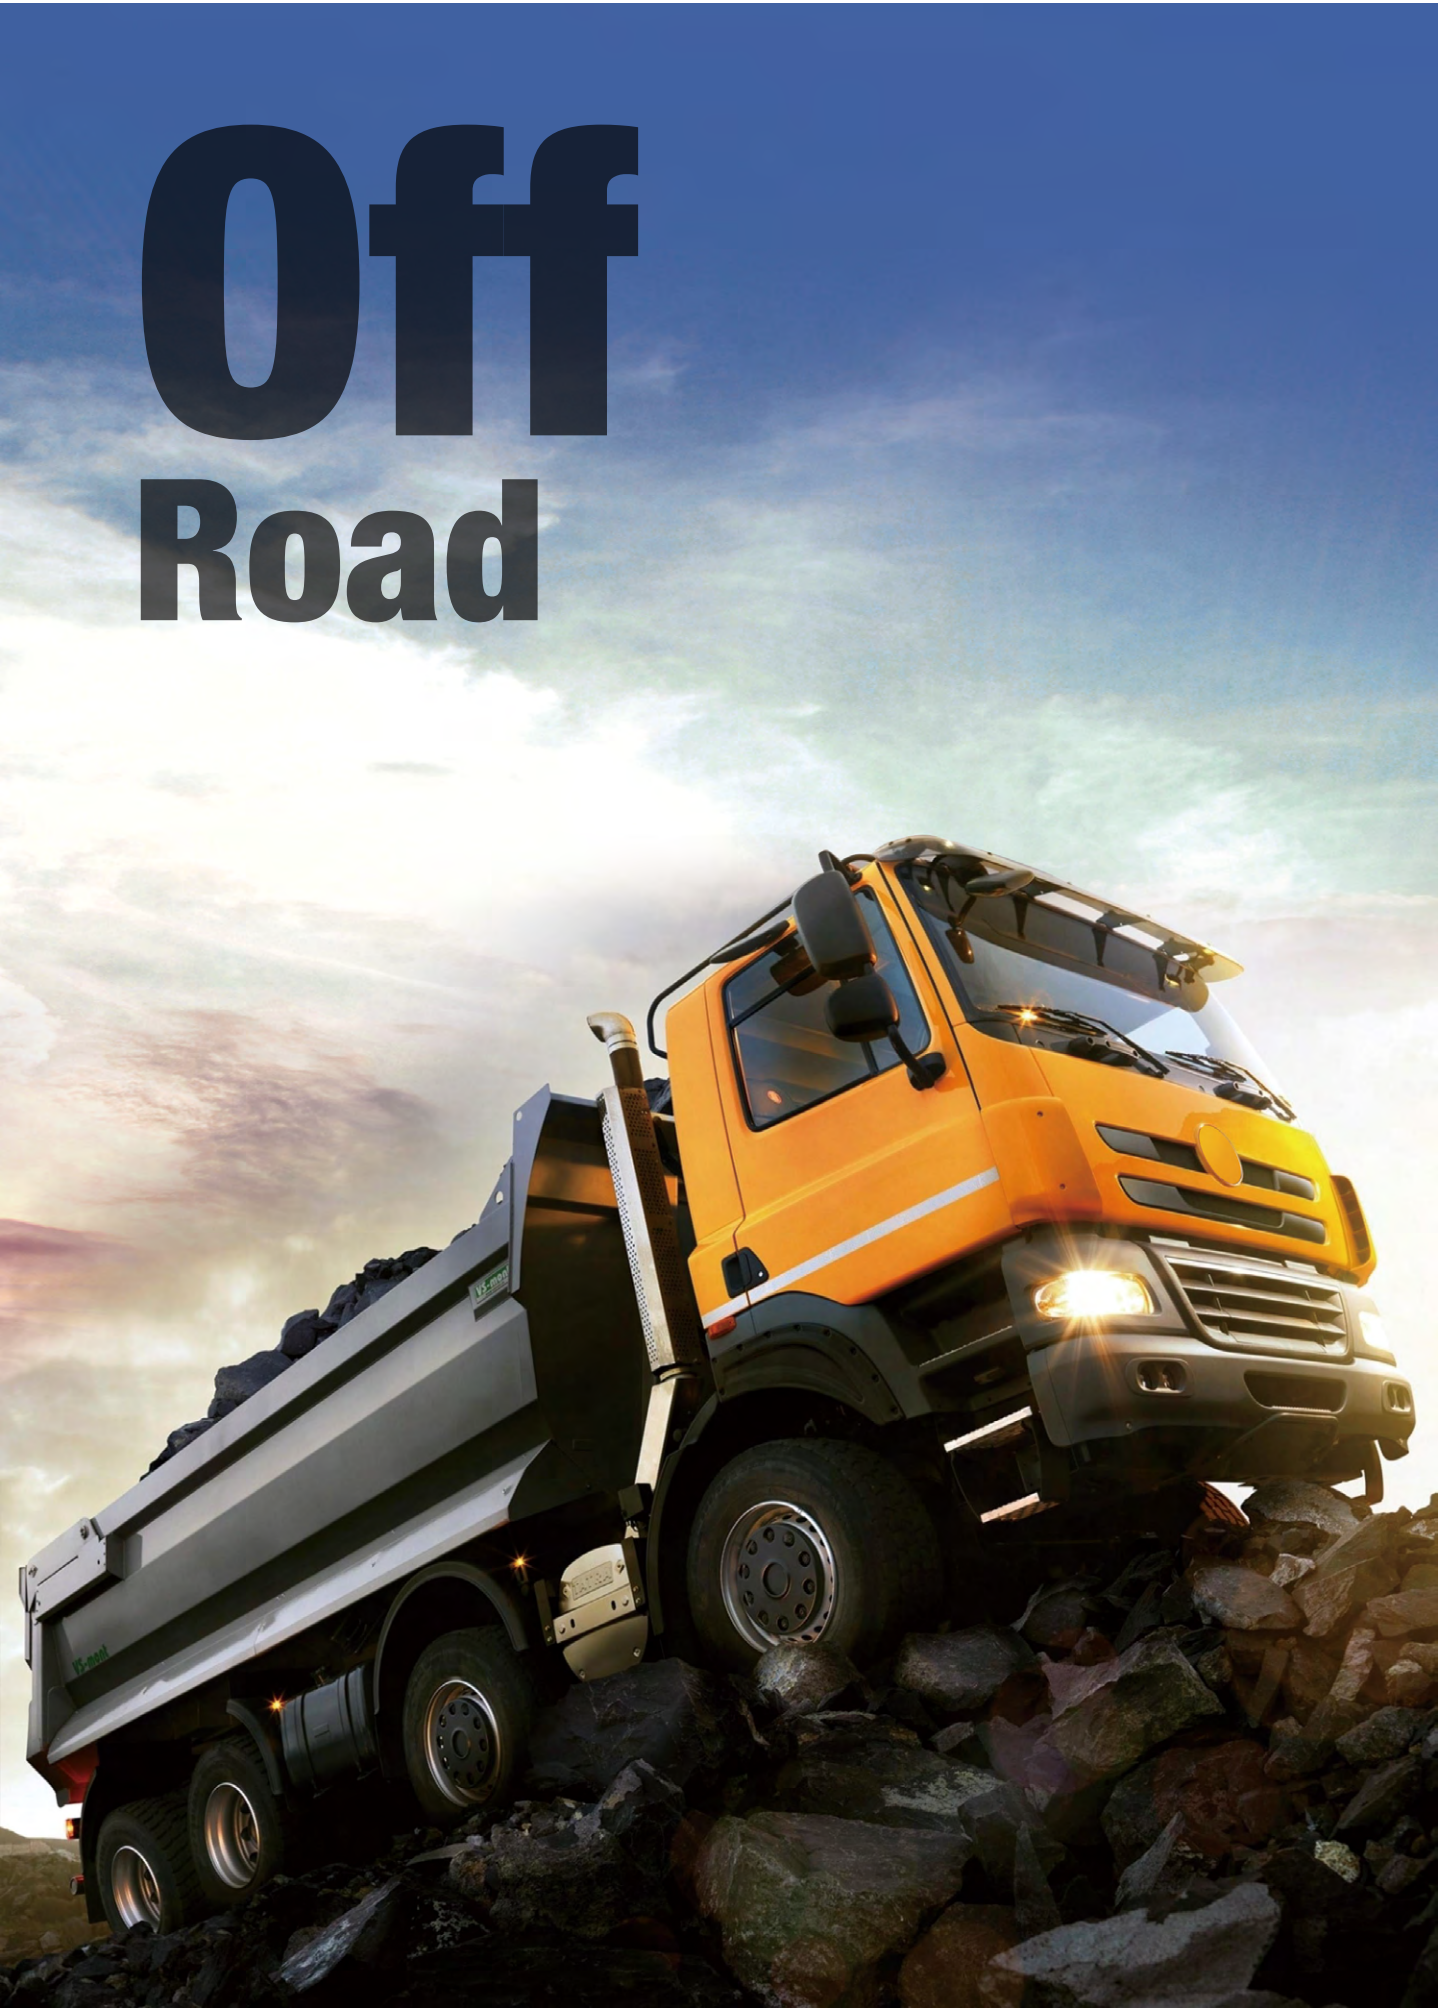



ADO986

Radial Truck Tire(Off Road Drive)

- Suitable for hilly area and mine etc.,off road conditions
- 1.Off-road pattern block ensures powerful traction and good self-cleaning ability.
 - 2.Chip,cut and abrasion resistance tread compound.
 - 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.5	GB
11R22.5	14	144/142	F	8.25	2650	720	2800	720	1065	279	24.0	TRA
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1065	279	24.0	TRA
11R22.5	16	148/145	F	8.25	2900	850	3150	850	1054	279	24.0	ETRTO
12R22.5	16	152/148	F	9.00	3150	850	3550	850	1084	300	24.0	ETRTO
12R22.5	18	152/149	F	9.00	3250	930	3550	930	1096	300	24.0	GB
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	24.0	ETRTO
11R24.5	14	146/143	F	8.25	2725	720	3000	720	1116	279	24.0	TRA
11R24.5	16	149/146	F	8.25	3000	830	3250	830	1116	279	24.0	TRA
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	24.5	ETRTO
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1050	298	24.5	GB
315/80R22.5	18	154/150	F	9.00	3350	825	3750	825	1076	312	24.0	ETRTO
315/80R22.5	20	156/150	F	9.00	3350	850	4000	850	1076	312	24.0	ETRTO



ADO913

Radial Truck Tire(Off Road Drive)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1065	278	20.0	GB
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1054	279	20.0	ETRTO
275/80R22.5	16	149/146	J	8.25	3000	850	3250	850	1012	276	20.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO



ADO993

Radial Truck Tire(Off Road All Position)

- Suitable for mine,off road conditions
- 1.Off-road pattern block ensures powerful traction and good self-cleaning ability.
 - 2.Chip,cut and abrasion resistance tread compound.
 - 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	24.5	GB
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1065	278	24.5	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.5	GB



ADO983

Radial Truck Tire(Off Road Drive)

- Suitable for hilly area and mine etc.,off road conditions
- 1.Off-road pattern block ensures powerful traction and good self-cleaning ability.
 - 2.Chip,cut and abrasion resistance tread compound.
 - 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	23.5	GB
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1065	278	24.0	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.0	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.0	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.0	GB
12.00R24	18	156/153	F	8.5	3650	775	4000	775	1226	313	24.0	ETRTO
12.00R24	20	160/156	F	8.5	4000	850	4500	850	1226	313	24.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	22.0	ETRTO
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1050	298	22.0	GB



LLD10

Radial Truck Tire(Off Road Drive)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	14	141/139	F	7.0	2430	790	2575	790	1019	259	20.0	TRA
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1019	259	20.0	GB
10.00R20	16	146/143	J	7.5	2725	830	3000	830	1054	278	20.0	TRA
10.00R20	18	149/146	J	7.5	3000	930	3250	930	1054	278	20.0	GB
11.00R20	16	150/147	F	8.0	3075	830	3350	830	1085	293	20.0	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1085	293	20.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.0	TRA
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	20.0	ETRTO



ADM991

Radial Truck Tire (Off Road All Position)

Suitable for off road conditions.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
14.00R20	18	160/157	F	10.00W	4125	700	4500	700	1238	370	19.5	ETRTO
14.00R20	20	164/160	F	10.00W	4500	750	5000	750	1238	370	19.5	ETRTO
385/65R22.5	20	164	E	11.75	--	--	4500	900	1072	389	13.0	ETRTO
445/45R19.5	20	164	E	15.00	--	--	4500	900	895	446	13.0	ETRTO



D950

Radial Truck Tire (Short Haul)

- 1.Drive axle for on/off road conditions.
- 2.Deep and rigid block design for good traction.
- 3.Cut resistance compound.
- 4.Used for logging conditions where high traction required.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1065	279	23.0	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1065	279	23.0	TRA
11R24.5	14	146/143	F/G	8.25	2725	720	3000	720	1116	279	25.0	TRA
11R24.5	16	149/146	F/G	8.25	3000	830	3250	830	1116	279	25.0	TRA
295/75R22.5	16	146/143	J	9.00	2725	830	3000	830	1026	298	23.0	TRA
285/75R24.5	16	147/144	J	8.25	2800	830	3075	830	1062	283	23.0	TRA



D969

Radial Truck Tire(Off Road All Position)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.25R20	12	133/131	F	6.5	1950	720	2060	720	974	236	21.5	GB
8.25R20	14	136/134	F	6.5	2120	830	2240	830	974	236	21.5	GB
8.25R20	16	139/137	F	6.5	2300	930	2430	930	974	236	21.5	GB
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1036	259	23.5	GB
10.00R20	18	149/146	J	7.5	3000	930	3250	930	1065	278	25.5	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	25.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	25.5	TRA
12R22.5	18	152/149	J	9.00	3250	930	3550	930	1096	300	25.5	GB
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO




D990

Radial Truck Tire (Off Road All Position)
Suitable for off road conditions.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
14.00R20	18	160/157	F	10.00W	4125	700	4500	700	1238	370	19.5	ETRTO
14.00R20	20	164/160	F	10.00W	4500	750	5000	750	1238	370	19.5	ETRTO

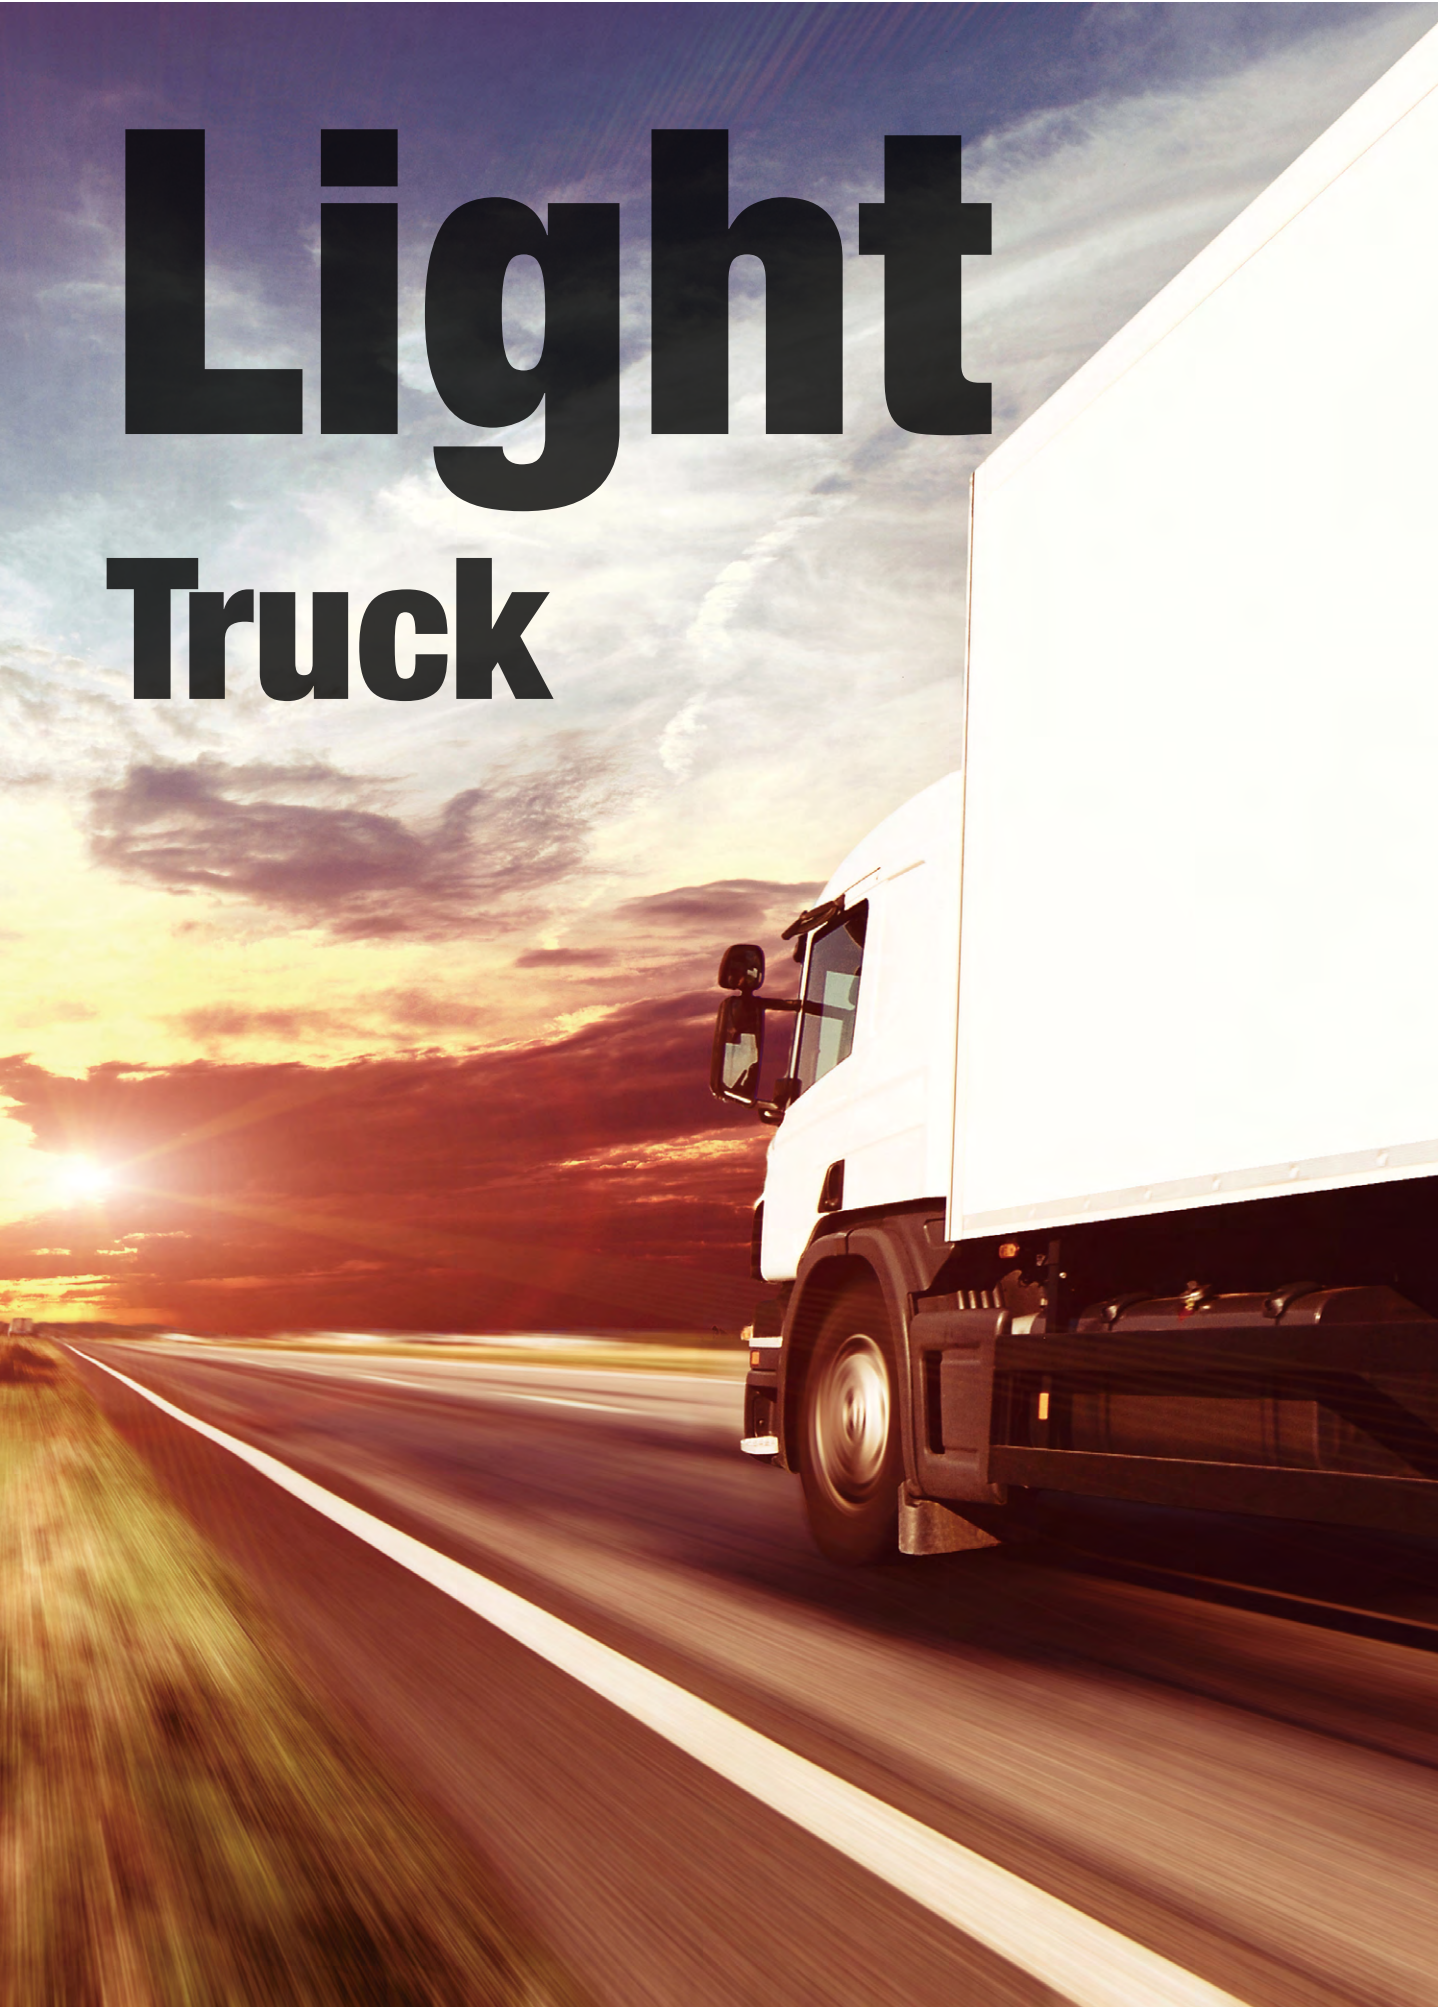



KCA651

Radial Truck Tire (Regional)

Suitable for all position axle of light trucks.
1.Thick sidewall design protect against sidewall impacts and bruises.
2.Zig-zag grooves for excellent handling.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	10.0	GB
7.00R16LT	14	118/114	M	5.50F	1180	770	1320	770	775	200	10.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	11.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.0	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1500	560	855	235	11.5	GB
8.25R16LT	14	126/122	M	6.50H	1500	670	1700	670	855	235	11.5	GB
8.25R16LT	16	128/124	M	6.50H	1600	770	1800	770	855	235	11.5	GB



KMA653

Radial Truck Tire (On&Off Road)

Suitable for all position axle of trucks.
1.Thick sidewall design protects against sidewall impacts and bruises.
2.Stone rejection design protects groove bottom from stone puncture.
3.HAT technology: low heat generation.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	K	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	12	120/116	K	6.00G	1250	670	1400	670	805	215	12.5	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	12.5	GB
8.25R16LT	12	123/119	K	6.50H	1360	560	1500	560	855	235	13.0	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	855	235	13.0	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	13.0	GB



KMA652

Radial Truck Tire (On&Off Road)

Suitable for all position axle of light trucks.
1.Thick sidewall design protects against sidewall impacts and bruises.
2.Stone rejection design protects groove bottom from stone puncture.
3.HAT technology: low heat generation.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	K	5.50F	1060	670	1215	670	775	200	10.0	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	10.0	GB
7.50R16LT	12	120/116	K	6.00G	1250	670	1400	670	805	215	11.0	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	11.0	GB
8.25R16LT	12	123/119	K	6.50H	1360	560	1500	560	855	235	11.5	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	855	235	11.5	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	11.5	GB



KLS200

Radial Truck Tire (Regional All Position)

Suitable for medium trucks running on the high-grade road.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	12.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	212	12.5	ETRTO
225/75R17.5	12	126/125	M	6.75	1650	675	1700	675	783	226	12.5	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	12.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	12.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	12.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	12.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.5	ETRTO
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	12.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	12.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	12.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	12.5	ETRTO



KLD200

Radial Truck Tire (Regional Drive)
Suitable for medium trucks running on the high-grade road.



NEW

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	14.0	ETRTO
225/75R17.5	12	126/125	M	6.75	1650	675	1700	675	783	226	14.5	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	14.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	14.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	14.5	ETRTO



KTD23

Radial Truck Tire(Regional Drive)
Suitable for drive axle of trucks using for high traction and high scrub applications.
1.Horizontal pattern provides tyre excellent driving and braking performance.
2.Shoulder pattern groove and open pattern design with good tire heat dissipation.
3.Pattern block stiffener effectively restrains grinding block root tear and decorative pattern.



NEW

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
215/75R17.5	16	135/133	L	6.00	2060	850	2180	850	767	212	15.0	ETRTO
225/70R19.5	12	125/123	L	6.75	1550	660	1650	660	811	226	15.8	TRA
225/70R19.5	14	128/126	L	6.75	1700	760	1800	760	811	226	15.8	TRA
245/70R19.5	14	133/131	L	7.50	1950	760	2060	760	839	248	15.8	TRA
245/70R19.5	16	135/133	L	7.50	2060	830	2180	830	839	248	15.8	TRA



KJT016

Radial Truck Tire(Regional Drive)
Regional Haul Application / Pickup & Delivery Service Drive.
1.Aggressive zigzag center grooves and open shoulder grooves provide outstanding traction in mud and snow.
2.Stone rejectors protects the casing in base of the tread groove.
3.Protect ribs on both sidewalls to fight damage from curbing, cuts and abrasions.
4.3D sipes lock together under compression for the stability of a solid block.
5.Strong carcass materials help promote tire durability and provide tire retreadability.




NEW

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	TRA
225/70R19.5	14	128/126	N	6.75	1700	760	1800	760	811	226	15.0	TRA



KCA661

Radial Truck Tire (Regional)
Suitable for all position axle of light trucks.
1.Thick sidewall design protect against sidewall impacts and bruises.
2.Zig-zag grooves for excellent handling.
3.Long life.



NEW

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	783	200	12.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB




KMA662

Radial Truck Tire (Regional)

- Suitable for all position axle of light trucks.
- 1.Thick sidewall design protect against sidewall impacts and bruises.
 - 2.Zig-zag grooves for excellent handling.
 - 3.Long life.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	783	200	12.0	GB
7.50R16LT	12	120/116	K	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	13.0	GB



AFL866

Radial Truck Tire (Regional All Position)

- 1.Extra wide tread design for high mileage and even wear.
- 2.Zig-zag grooves for excellent handling.
- 3.Optimize structure design.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.00R13LT	8	93/89	L	4.50B	580	460	650	460	655	170	10.0	GB
6.00R14LT	8	95/90	L	4 1/2J	600	450	690	450	680	170	10.0	GB
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
205/65R17.5	16	129/127 (132/132)	J(G)	6.00	1750	900	1850	900	711	205	12.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	212	14.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA



AAR919

Radial Truck Tire (On&Off Road All Position)

- 1. Optimizing pattern design, reducing shoulder heat generation.
- 2. Wide tread width with strong rib design, improving the wear mileage.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.00R14LT	8	95/90	K	4 1/2J	600	450	690	450	680	170	10.0	GB
6.00R15LT	8	97/92	K	4.50E	630	460	730	460	705	170	10.5	GB
6.50R16LT	12	110/105	K	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	14.0	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	15.0	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	16.0	GB



ADL831

Radial Truck Tire (Regional Drive)

- 1.Typical block pattern design make good towingand grip on wet and dry road.
- 2.Strong wear resistance and long life.
- 3.Retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	18.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	18.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	18.0	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	16.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	212	16.0	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	17.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	17.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	17.0	ETRTO



AAR959

Radial Truck Tire (On&Off Road All Position)

- 1.Wide and deep tread grooves for long tire life.
- 2.Excellent cutting and chipping resistance.
- 3.Robust tread and high traction on rough surfaces.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.00R13LT	8	93/89	F	4.50B	580	460	650	460	655	170	12.5	GB
6.00R14LT	8	95/90	F	4 1/2J	600	450	690	450	680	170	12.5	GB
6.00R15LT	8	97/92	F	4.50E	630	460	730	460	705	170	12.5	GB
6.50R16LT	12	110/105	F	5.50F	925	670	1060	670	750	185	13.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	783	200	17.0	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	18.0	GB
8.25R16LT	16	128/124	D	6.50H	1600	770	1800	770	865	235	18.0	GB
9.00R16LT	16	134/129	D	6.50H	1850	770	2120	770	900	255	18.0	GB



F815

Radial Truck Tire (Regional All Position)

Suitable for small trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.00R14LT	8	95/90	L	4 1/2J	600	450	690	450	680	170	10.0	GB
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	10.5	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	10.5	GB



F830

Radial Truck Tire (Regional All Position)

Suitable for small trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	10.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	10.5	GB



LLF26

Radial Truck Tire (Regional All Position)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.25R15TR	12	126/124	M	6.50	1600	720	1700	720	847	236	12.5	TRA
8.25R15TR	14	129/127	L	6.50	1750	830	1850	830	847	236	12.5	TRA
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	12.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	12.5	GB
8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	12.5	ETRTO
9.5R17.5	14	129/127	M	6.75	1750	750	1850	750	842	240	12.0	ETRTO
9.5R17.5	18	143/141	M/J	6.75	2575	875	2725	875	842	240	12.0	ETRTO
8R19.5	12	124/122	M	6.00	1500	760	1600	760	859	203	12.5	TRA



F820

Radial Truck Tire (Regional All Position)
Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	13.0	ETRTO
205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	205	12.5	ETRTO
215/75R17.5	12	124/123	M	6.00	1550	675	1600	675	767	212	12.5	ETRTO
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	212	12.5	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	212	12.5	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	13.0	ETRTO
235/75R17.5	16	141/140	L	6.75	2500	850	2575	850	797	233	13.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	12.5	TRA
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	12.5	TRA
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	13.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	13.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	13.0	ETRTO
245/70R19.5	16	136/134	L/M	7.50	2120	825	2240	825	839	248	13.0	ETRTO



LLF86

Radial Truck Tire (Regional All Position)
Suitable for medium trucks running on the high-grade road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	212	12.0	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	212	12.0	ETRTO



LLA78

Radial Truck Tire (Regional All Position)
Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.0	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	13.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	13.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO



D905

Radial Truck Tire (Regional Drive)
1.Suitable for medium trucks running on the high-grade road.
2.Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
245/70R17.5	18	143/141	L	7.50	2575	875	2725	875	789	248	18.0	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	GB
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	15.0	GB
245/70R19.5	14	133/131	L	7.50	1950	760	2060	760	839	248	16.5	TRA
245/70R19.5	14	133/131	L	7.50	1950	750	2060	750	839	248	16.5	ETRTO
245/70R19.5	16	136/134	L	7.50	2120	825	2240	825	839	248	16.5	ETRTO
215/75R17.5	12	124/123	M	6.00	1550	675	1600	675	767	212	15.0	ETRTO
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	212	15.0	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	212	15.0	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	15.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	15.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	15.5	ETRTO



D955

Radial Truck Tire (On&Off Road Drive)

- 1.Suitable for medium trucks running on the normal road.
- 2.Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	12.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	14.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	15.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	15.5	GB
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	14.5	TRA
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	15.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	15.5	ETRTO
245/70R19.5	16	136/134	L	7.50	2120	825	2240	825	839	248	15.5	ETRTO



LLA08

Radial Truck Tire (On&Off Road All Position)

- 1.Suitable for medium trucks running on the normal road.
- 2.Typical combined pattern.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	10.5	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	10.5	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	12.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	13.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	13.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	13.5	GB
9.00R16LT	14	131/126	L	6.50H	1750	670	1950	670	890	255	14.5	GB
9.00R16LT	16	134/129	L	6.50H	1850	770	2120	770	890	255	14.5	GB



LLD09

Radial Truck Tire (On&Off Road Drive)

- 1.Suitable for medium trucks running on the normal road.
- 2.Typical combined pattern.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	12.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	12.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	815	215	13.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	815	215	13.5	GB
8.25R16LT	12	123/119	L	6.50H	1360	560	1550	560	865	235	14.5	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	865	235	14.5	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	865	235	14.5	GB
215/75R17.5	12	124/123	K	6.00	1550	675	1600	675	767	212	14.0	ETRTO
215/75R17.5	14	126/124	K	6.00	1600	700	1700	700	767	212	14.0	ETRTO
215/75R17.5	16	128/126	K	6.00	1700	750	1800	750	767	211	14.0	ETRTO
215/75R17.5	16	135/133	K	6.00	2060	850	2180	850	767	212	14.0	ETRTO
235/75R17.5	14	132/130	K	6.75	1900	775	2000	775	797	233	15.0	ETRTO
235/75R17.5	16	141/140	K	6.75	2500	850	2575	850	797	233	15.0	ETRTO
235/75R17.5	18	143/141	K	6.75	2575	875	2725	875	797	233	15.0	ETRTO



AAM903

Radial Truck Tire (On&Off Road All Position)

- 1.Suitable for medium trucks running on on/off road.
- 2.High traction.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.50R16LT	8	112/107	L/M	6.00G	975	460	1120	460	805	215	9.5	GB



D969

Radial Truck Tire (Off Road All Position)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	F	5.50F	1060	670	1215	670	775	200	15.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	775	200	15.5	GB
7.50R16LT	12	120/116	F	6.00G	1250	670	1400	670	815	215	17.5	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	17.5	GB
8.25R16LT	12	123/119	F	6.50H	1360	560	1550	560	865	235	17.5	GB
8.25R16LT	14	126/122	F	6.50H	1500	670	1700	670	865	235	17.5	GB
8.25R16LT	16	128/124	F	6.50H	1600	770	1800	770	865	235	17.5	GB



ADO993

Radial Truck Tire (Off Road All Position)

- 1.Off-road pattern block ensures powerful traction and good self-cleaning ability.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.50R16LT	12	110/105	F	5.50F	925	670	1060	670	750	185	13.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	775	200	14.5	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	16.5	GB
8.25R16LT	16	128/124	F	6.50H	1600	770	1800	770	865	235	18.0	GB



AAL812

Radial Truck Tire (Regional All Position)

Suitable for small trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
205/85R16LT	10	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



AAL867

Radial Truck Tire (Regional All Position)

Suitable for small trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
205/85R16LT	10	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



F835

Radial Truck Tire (Regional All Position)

Suitable for small trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
LT225/75R16	12	119/116	N	6.00	1250	650	1360	650	744	223	11.1	TRA
LT245/75R16	12	123/120	N	7.00	1400	650	1550	650	774	248	11.1	TRA
LT235/85R16	14	126/123	L	6 1/2J	1550	750	1700	750	806	235	8.9	--
ST235/85R16	14	132/127	L	6 1/2J	1750	760	2000	760	806	235	8.9	TRA

Coach&Urban




ADU610

Radial Bus Tire (Urban Drive)

- 1.Enhanced sidewall ensures high safety.
- 2.Tire strength is increased by 35%,with application of ST steel cord.
- 3.Tire bead cracking is prevented,with application fiber layer in bead area.

NEW




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	J	8.25	2725	830	3000	830	1054	279	21.5	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1054	279	21.5	ETRTO



AAU609

Radial Bus Tire (Urban All Position)

- 1.Enhanced sidewall ensures high safety.
- 2.Tire strength is increased by 35%,with application of ST steel cord.
- 3.Tire bead cracking is prevented,with application fiber layer in bead area.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
305/70R22.5	20	152/150 (154/150)	J(F)	9.00	3350	900	3550	900	1000	305	21.0	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	21.0	ETRTO
275/70R22.5	18	150/148 (152/148)	J(E)	8.25	3150	900	3350	900	958	276	21.0	ETRTO
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	21.0	ETRTO



AAU608

Radial Bus Tire (Coach All Position)
1.Enhanced sidewall ensures high safety.
2.Tire strength is increased by 35%,with application of ST steel cord.
3.Good wet traction.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	17.0	ETRTO



U801

Radial Bus Tire(Urban All Position)
1.High safety and long life.
2.Good wet traction.
3.Typical used for urban bus.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	J	8.25	2725	830	3000	830	1054	279	20.0	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1054	279	20.0	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	19.5	ETRTO
305/70R22.5	16	152/148 (154/150)	J(E)	9.00	3150	900	3550	900	1000	305	20.0	ETRTO
295/80R22.5	16	152/148 (154/150)	J(E)	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	18	152/149	J	9.00	3250	900	3550	900	1044	298	20.0	GB



AAU802

Radial Bus Tire (Urban All Position)
1.Enhanced sidewall ensures high safety.
2.Long service life.
3.Typical used for urban bus.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1054	279	20.0	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1054	279	20.0	ETRTO
255/70R22.5	16	140/137	J	7.50	2300	800	2500	800	930	255	19.0	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	19.5	ETRTO
305/70R22.5	16	152/148 (154/150)	J(E)	9.00	3150	900	3550	900	1000	305	20.0	ETRTO
295/80R22.5	16	152/148 (154/150)	J(E)	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	18	152/149	J	9.00	3250	900	3550	900	1044	298	20.0	GB



AAU603

Radial Bus Tire (Coach All Position)
1.Suitable for all axle of bus riding on highway.
2.Long life.
3.Good grip performance.
4.low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15.0	TRA
10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	15.0	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1020	254	15.0	ETRTO
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	16.0	ETRTO
12R22.5	16	152/148	M	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	16.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB




AAU605

Radial Bus Tire (Small Bus All Position)
1.Extra wide tread design for high mileage and even wear.
2.Zig-zag grooves for excellent handling.
3.Optimize structure design.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
8R22.5	14	130/128	M	6.00	1800	830	1900	830	935	203	14.0	GB
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	212	14.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA

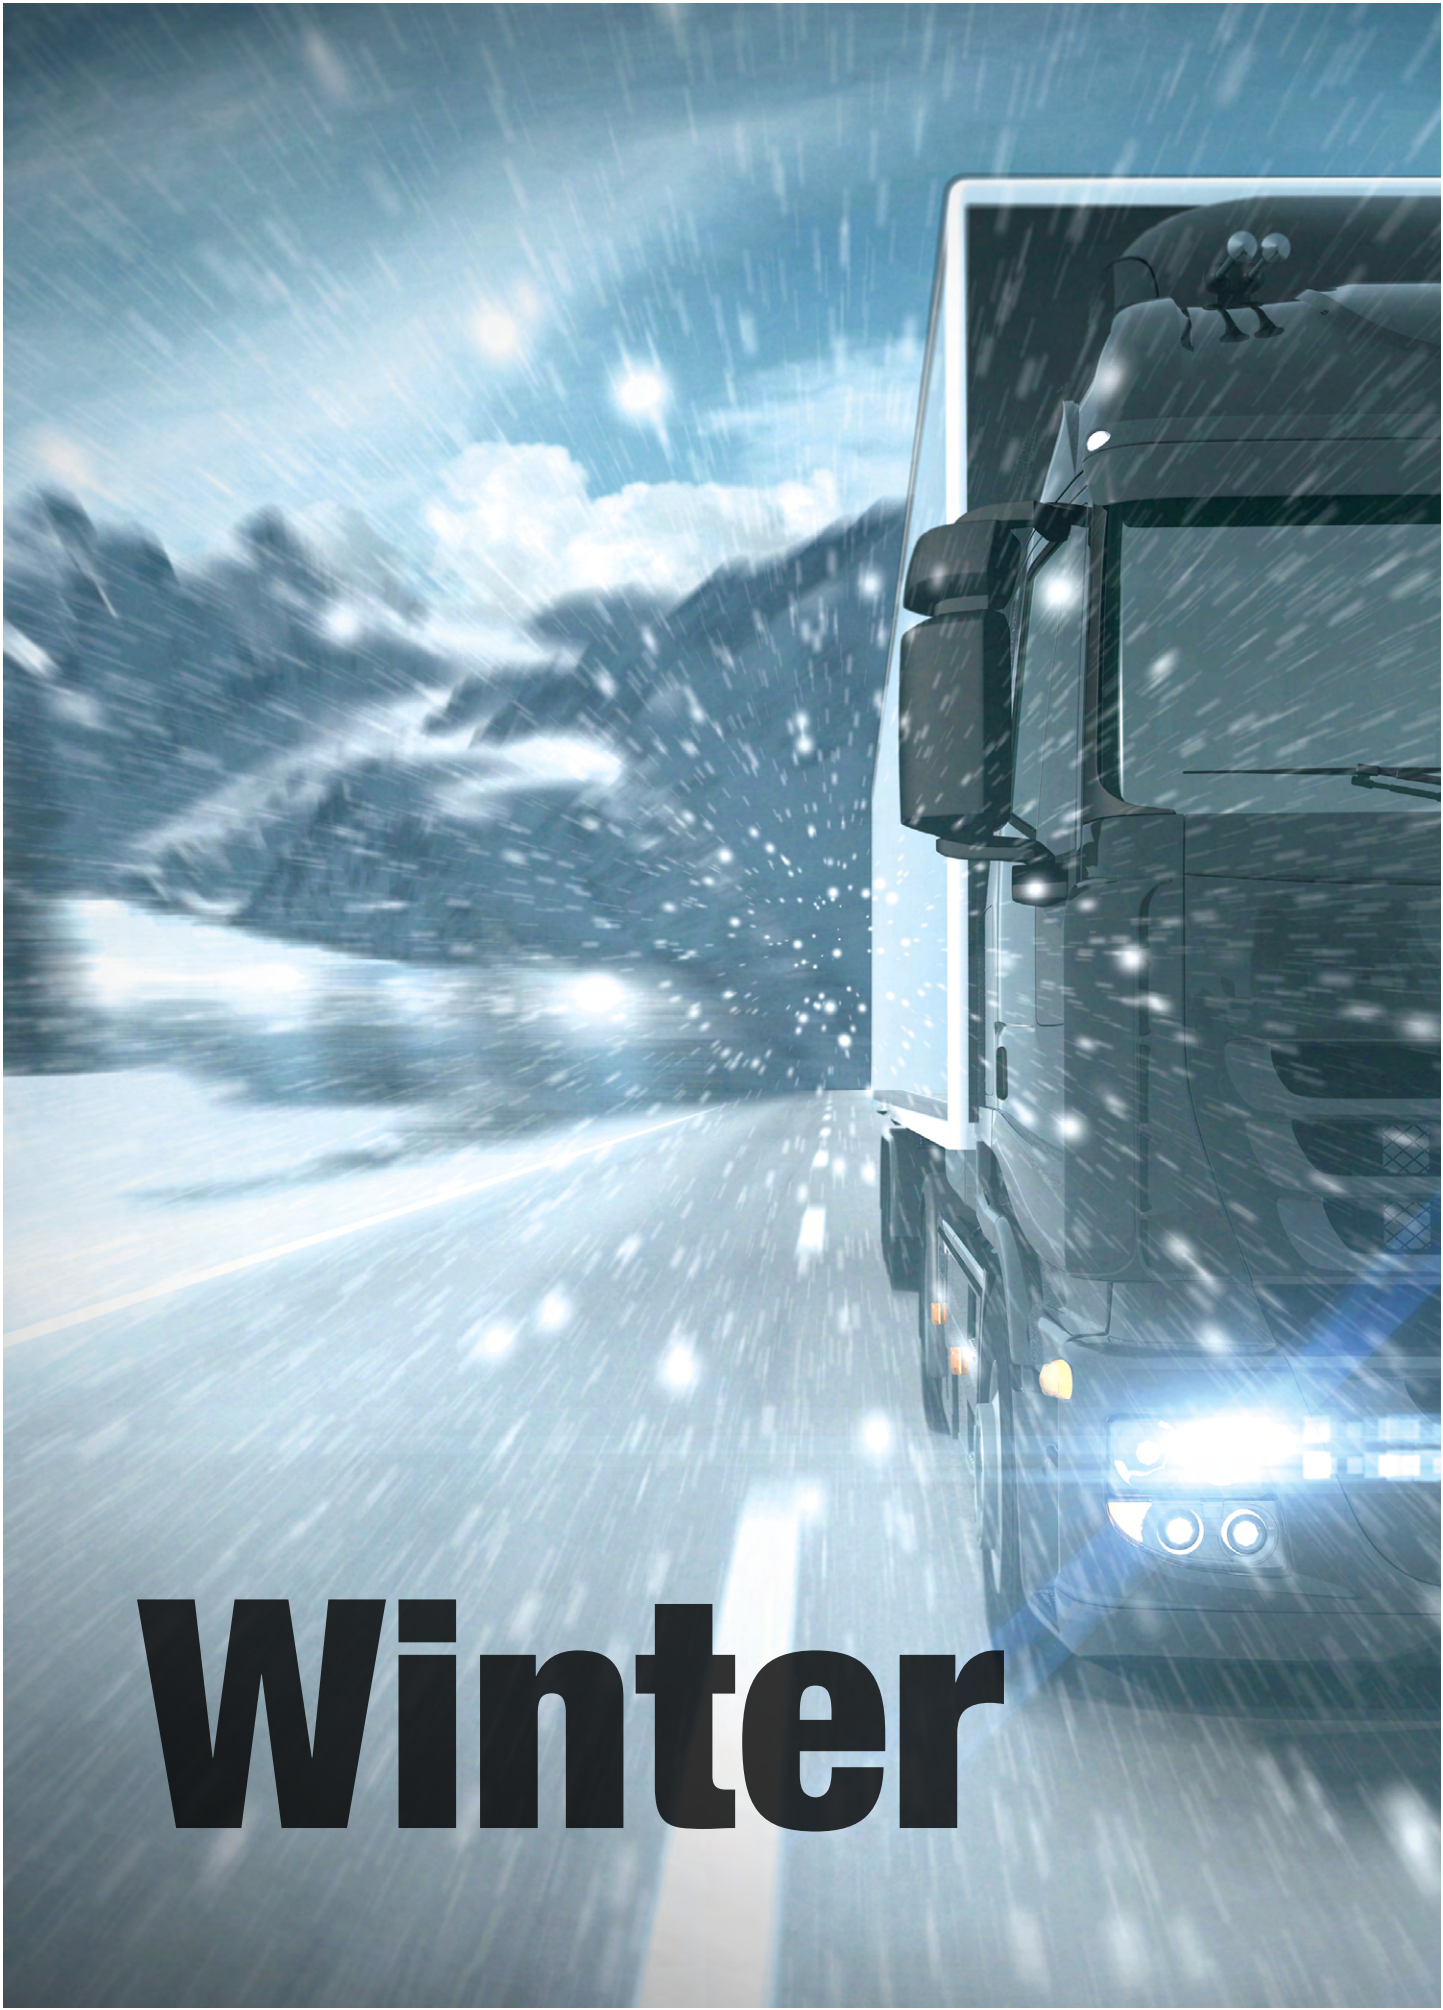




KWS600

Radial Truck Tire On Ice And Snow

Suitable for steer axle of trucks under snow condition.
1.Lasting grip and stability ,with M+S and 3PMSF marking.
2.Optimized rib contact combats uneven wear and improves wet handling and braking.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	16.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.5	ETRTO
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	14.5	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	14.5	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	15.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	15.5	ETRTO



KWD600

Radial Truck Tire On Ice And Snow

Suitable for drive axle of trucks under snow condition.
1.Lasting grip and stability ,with M+S and 3PMSF marking.
2.Optimized rib contact combats uneven wear and improves wet handling and braking.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.5	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	20.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	22.0	ETRTO



KWD700

Radial Truck Tire On Ice Snd Snow

Long Haul Application Drive.
1.3D kerf technology provides excellent traction and long original tread life;
2.Wide tread design and combined structure of rib and block pattern provides stability, longer mileage and better handling performance in all weather conditions;
3.Long life, low rolling resistance;
4.Optimizes the footprint for even wear and long tread life;
5.Strong carcass materials help promote tire durability and provide tire retreadability.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	21.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	21.5	TRA



ADW807

Radial Truck Tire On Ice And Snow (Drive)

1.High safety and good handling.
2.Optimized rib contact combats uneven wear and improves wet handling and braking.
3.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	11.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	11.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
11R22.5	16	146/143	M	8.25	2725	800	3000	800	1054	279	20.0	JATMA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	20.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1054	279	20.0	ETRTO
315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	20.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	20.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	20.0	ETRTO



ADW808

Radial Truck Tire On Ice And Snow (All Position)

- 1.High safety and good handling.
- 2.Optimized rib contact combats uneven wear and improves wet handling and braking.
- 3.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.00R14LT	8	95/90	L	4 1/2J	600	450	690	450	680	170	10.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.0	GB
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	15.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	15.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	15.0	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	GB
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	15.0	GB
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	13.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	212	13.0	ETRTO
215/75R17.5	14	125/122	M	6.00	1500	760	1650	760	767	211	13.0	GB
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	13.0	GB
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	14.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.0	ETRTO
235/75R17.5	14	129/126	L	6.75	1700	760	1850	760	797	233	14.0	GB
235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	14.0	GB



AFW806

Radial Truck Tire On Ice And Snow (All Position)

- 1.High safety and good handling.
- 2.Optimized rib contact combats uneven wear and improves wet handling and braking.
- 3.Low noise.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	11.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	11.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.0	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
11R22.5	16	146/143	M	8.25	2725	800	3000	800	1054	279	15.0	JATMA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	15.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1054	279	15.0	ETRTO
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	15.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	15.0	TRA
385/65R22.5	20	160(158)	J(L)	11.75	--	--	4500	900	1072	389	16.5	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	15.0	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	15.0	GB
315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	15.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	15.0	TRA
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	15.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	15.0	ETRTO