



2019 TIRE CATALOGUE

PASSENGER CAR TIRE
TRUCK & BUS TIRE
SPECIALTY TIRE

2019.06



CONTENTS

PCR TIRE	007
TBR TIRE	035
SPECIALTY TIRE	073


Company Profile

Linglong Tire is a global manufacturing enterprise with large scale facilities. After several years of innovation development, Linglong has been consistently among the top 20 tire enterprises in the world and top 3 in China for several years.

Currently, Linglong has established manufacturing facilities in Dezhou China, Liuzhou China, Jingmen China and Thailand while maintaining the operations facility in Zhaoyuan China, in order to form its 5+3 global layout. On August 21, 2018, Linglong brought forward to build high performance radial tire project with annual capacity reaching 13.62 million units in the free trade area of Zrenjanin, southeast of Serbia, which demonstrates that Linglong's second overseas manufacturing base will be in Serbia. On 30th of March, 2019, Linglong International Europe D.O.O. Zrenjanin (LLIE) project launch ceremony was held in Serbia successfully.

Linglong is dedicated in achieving world-class tire company and target to be the world-class tire enterprise with global competitiveness, advanced technology and management.

5+3 Global Development Layout

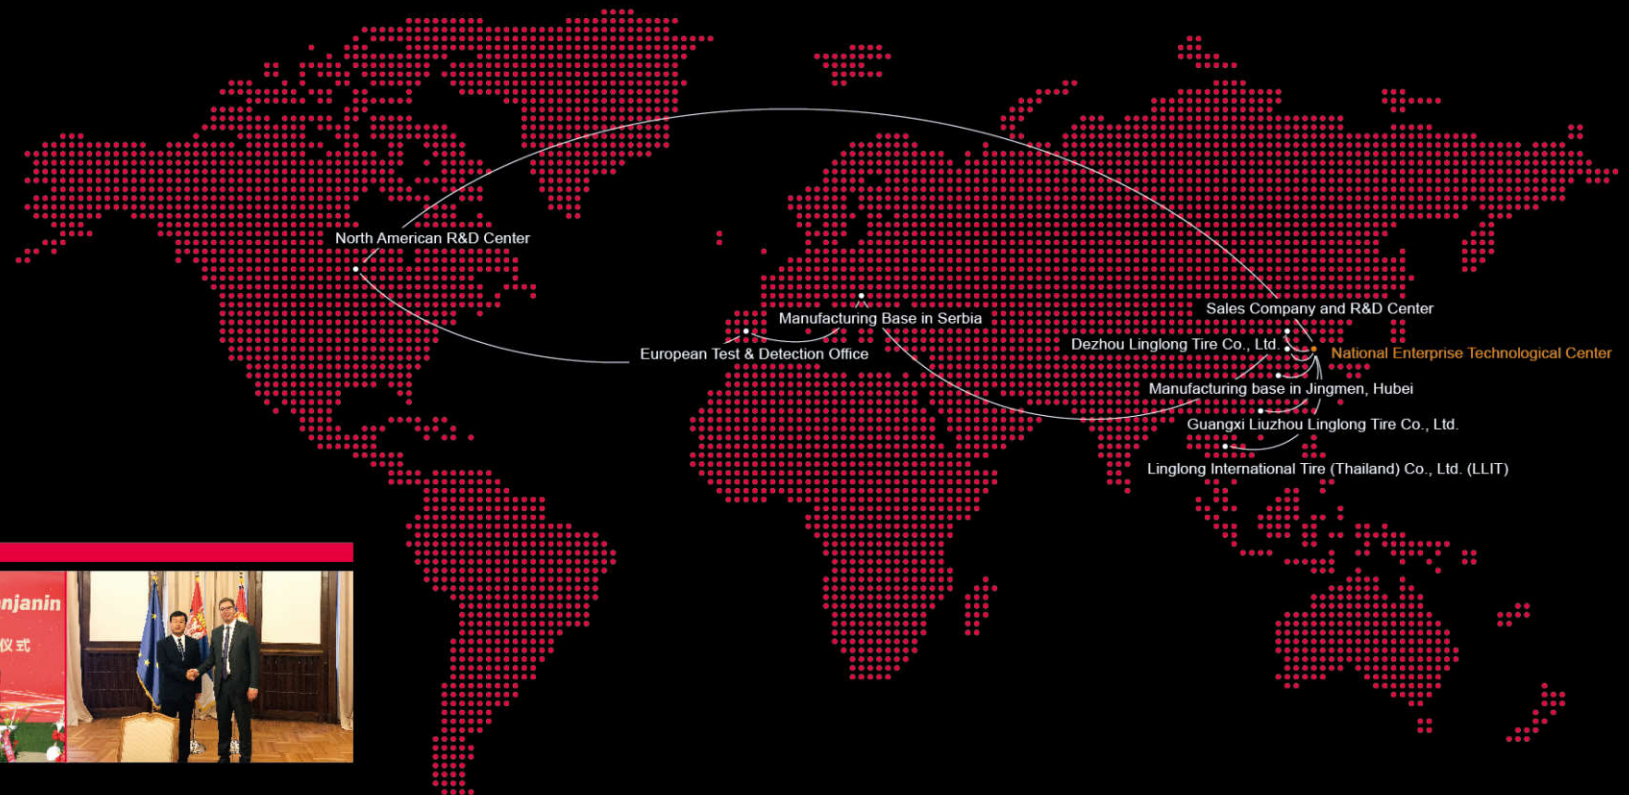



Linglong Group makes the investment and construction of the first specialized large-scale outdoor comprehensive tire proving ground, Sino-Asia Tire Proving Ground, providing a powerful support for the quality improvement and product development of Linglong Tire.

Tire Proving Ground



ATLAS drift team was built to take part in the D1 GRAND PRIX.

Sports Events



- ① JUVENTUS Official Tire
- ② Sponsor the VfL Wolfsburg
- ③ Sponsor the FIBA ZONE 5 Africa Basketball Team
- ④ Sponsor the Ratchabun Mittr Phol FC
- ⑤ 2017 Linglong Tire Youth Football Training Camp
Opened in Thailand
- ⑥ Sponsor China Truck Racing Championship
- ⑦ Sponsor China Grand Rally
- ⑧ Sponsor China Volleyball Super League
- ⑨ Cooperation with World Boxing Female Champion
- ⑩ ATLAS TIRE CROSSES LOP NUR AND
CONQUERS THE GOBI DESERT



LEGEND UHP

UHP Tire with Excellent Wet Grip and Low Noise

1. Excellent handling performance;
2. Improved drainage performance to effectively reduce risk of hydroplaning;
3. Superior driving stability;
4. Comfortable ride;
5. Designed to fit premium cars and sports cars.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/40R17 XL	84	W	7 1/2J	500	290	596	212	7.8
205/45R16 XL	87	W	7J	545	290	590	206	7.8
205/50R16	87	W	6 1/2J	545	250	612	214	7.8
205/50R17 XL	93	W	6 1/2J	650	290	638	214	7.8
215/35R18 XL	84	W	7 1/2J	500	290	607	218	7.8
215/45R17 XL	91	W	7J	615	290	626	213	7.8
215/50R17 XL	95	W	7J	690	290	648	226	7.8
215/55R17 XL	98	W	7J	750	290	668	226	7.8
225/40R18 XL	92	W	8J	630	290	637	230	7.8
225/45R17 XL	94	W	7 1/2J	670	290	634	225	7.8
225/45R18 XL	95	W	7 1/2J	690	290	659	225	7.8
225/50R17 XL	98	W	7J	750	290	658	233	7.8
225/55R17	97	W	7J	730	250	680	233	7.8
235/40R18 XL	95	W	8 1/2J	690	290	645	241	7.8
235/45ZR17 XL	97	W	8J	730	290	644	236	7.8
235/50R18 XL	101	W	7 1/2J	825	290	693	245	7.8
245/40R17	91	W	8 1/2J	615	250	628	248	7.8
245/40R18 XL	97	W	8 1/2J	730	290	653	248	7.8
245/40R19 XL	98	W	8 1/2J	750	290	679	248	7.8
245/45R17 XL	99	W	8J	775	290	652	243	7.8
245/45R18 XL	100	W	8J	800	290	677	243	7.8
245/45R19	98	Y	8J	750	250	703	243	7.8
255/35R18 XL	94	Y	9J	670	290	635	260	7.8
255/45R18 XL	103	W	8 1/2J	875	290	687	255	7.8



WONDER HP

Budget Tire

1. Low noise;
2. Excellent wet performance.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
175/70R12	80	H	5.00B	450	250	551	177	7.7
185/60R13	80	V	5.50B	450	250	552	189	7.7
185/80R14	91	T	5J	615	250	652	184	7.7



FORCE HP

(Three circumferential pattern grooves)
All-season Tire

1. Open shoulder groove design for superior safety and quiet ride.
2. Straight center pattern blocks for more comfortable ride.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
175/65R15	84	H	5J	500	250	609	177	7.7
175/70R13 WR	82	H	5.00B	475	250	576	177	7.2
185/55R15	82	V	6J	475	250	585	194	7.8
185/60R13 WR	80	H	5 1/2J	450	250	552	189	7.2
185/60R14	82	H	5 1/2J	475	250	578	189	7.8
185/65R14	86	H	5 1/2J	530	250	596	189	7.8
185/65R15	88	H	5 1/2J	560	250	621	189	7.8
195/50R15	82	H	6J	475	250	577	201	7.9
195/50R16	84	V	6J	500	250	602	201	7.9
195/55R15	85	V	6J	515	250	595	201	7.9
195/55R16	87	V	6J	545	250	620	201	7.9
195/60R15	88	H	6J	560	250	615	201	7.9
195/65R15	91	H	6J	615	250	635	201	7.9



FORCE HP

(Four circumferential pattern grooves)
All-season Tire

1. Open shoulder groove design for superior safety and quiet ride.
2. Straight center pattern blocks for more comfortable ride.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/50R16	87	V	6 1/2J	545	250	612	214	8.0
205/50R17 XL	93	V	6 1/2J	650	290	638	214	8.0
205/55R16	91	V	6 1/2J	615	250	632	214	8.0
205/60R15	91	H	6J	615	250	627	209	8.0
205/60R16	92	V	6J	630	250	652	209	8.0
205/65R15	94	H	6J	670	250	647	209	8.0
205/65R16	95	H	6J	690	250	672	209	8.0
215/45R17 XL	91	V	7J	615	290	626	213	8.1
215/50R17 XL	95	V	7J	690	290	648	226	8.1
215/55R16 XL	97	H	7J	730	290	642	226	8.1
215/55R17	94	V	7J	670	250	668	226	8.1
215/60R15	94	H	6 1/2J	670	250	639	221	8.1
215/60R16	95	V	6 1/2J	690	250	664	221	8.1
215/65R16	98	H	6 1/2J	750	250	686	221	8.1
225/40R18 XL	92	V	8J	630	290	637	230	8.2
225/45R17 XL	94	V	7 1/2J	670	290	634	225	8.2
225/45R18 XL	95	V	7 1/2J	690	290	659	225	8.2
225/50R17 XL	98	V	7J	750	290	658	233	8.2
225/50R18 XL	99	V	7J	775	290	683	233	8.2
225/55R16	95	V	7J	690	250	654	233	7.9
225/55R17	97	V	7J	730	250	680	233	8.2
225/55R18	98	V	7J	750	250	705	233	8.2
225/60R16	98	H	6 1/2J	750	250	676	228	8.2
225/60R17	99	H	6 1/2J	775	250	702	228	8.2
225/60R18	100	H	6 1/2J	800	250	727	228	8.2
225/65R16	100	H	6 1/2J	800	250	698	228	8.2
225/65R17	102	H	6 1/2J	850	250	724	228	8.2
235/40R18 XL	95	V	8 1/2J	690	290	645	241	8.3
235/45R17 XL	97	V	8J	730	290	644	236	8.3
235/45R18	94	V	8J	670	250	669	236	8.3
235/50R18	97	V	7 1/2J	730	250	693	245	8.3
235/55R17	99	V	7 1/2J	775	250	690	245	8.3
235/55R18	100	V	7 1/2J	800	250	715	245	8.3
235/55R19	101	V	7 1/2J	825	250	741	245	8.3
235/60R16	100	H	7J	800	250	688	240	8.3
235/60R17	102	H	7J	850	250	714	240	8.3
235/60R18	103	V	7J	875	250	739	240	8.3
235/65R17	104	H	7J	900	250	738	240	8.3
245/40R18 XL	97	V	8 1/2J	730	290	653	248	8.4
245/40R19 XL	98	V	8 1/2J	750	290	679	248	8.4
245/45R17 XL	99	V	8J	775	290	652	243	8.4
245/45R18 XL	100	V	8J	800	290	677	243	8.4
245/45R20	99	V	8J	775	250	728	243	8.4
245/50R17	99	V	7 1/2J	775	250	678	253	8.4
245/50R20	102	V	7 1/2J	850	250	754	253	8.4
255/50R19 XL	107	V	8J	975	290	739	265	8.5



GREEN

Low fuel consumption

1. Good straight driving stability;
2. More comfortable and quiet ride;
3. Low rolling resistance for better fuel efficiency;
4. Excellent wet grip to effectively reduce risk of hydroplaning.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
135/80R13	70	T	3 1/2J	335	240	546	133	7.6
145/70R13	71	T	4 1/2J	345	250	534	150	7.6
145/80R13	75	T	4J	387	240	562	145	7.6
155/70R13	75	T	4 1/2J	387	250	548	157	7.8
155/80R13	79	T	4 1/2J	437	240	578	157	7.8
155/65R13	73	T	4 1/2J	365	250	532	157	7.6
155/65R14	75	T	4 1/2J	387	250	558	157	7.6
165/60R14	75	H	5J	387	250	554	170	7.6
165/65R13	77	T	5J	412	250	544	170	7.6
165/65R14	79	T	5J	437	250	570	170	7.8
165/70R13	79	T	5J	437	250	562	170	7.8
165/70R14	81	T	5J	462	250	588	170	7.8
165/70R14 XL	85	T	5J	515	290	588	170	7.8
165/80R13	83	T	4 1/2J	487	240	594	165	7.6
175/60R14	79	H	5J	437	250	566	177	7.6
175/60R15	81	V	5J	462	250	591	177	7.6
175/65R13	80	T	5J	450	250	558	177	7.6
175/65R14	82	T	5J	475	250	584	177	7.6
175/65R14 XL	82	H	5J	475	250	584	177	7.6
175/65R15	84	T	5J	500	250	609	177	7.8
175/65R15	84	H	5J	500	250	609	177	7.8
175/70R13	82	T	5J	475	250	576	177	7.8
175/70R14	84	T	5J	500	250	602	177	7.8
175/70R14 XL	88	T	5J	560	290	602	177	7.8
175/80R14	88	T	5J	560	240	636	177	7.6
185/55R14	80	H	6J	450	250	560	194	8.0
185/55R15	82	H	6J	475	250	585	194	8.0
185/55R15	82	V	6J	475	250	585	194	8.0
185/60R14	82	H	5 1/2J	475	250	578	189	8.0
185/60R15	84	H	5 1/2J	500	250	603	189	8.0
185/60R15 XL	88	H	5 1/2J	560	290	603	189	8.0
185/65R14	86	T	5 1/2J	530	250	596	189	8.0
185/65R14	86	H	5 1/2J	530	250	596	189	8.0
185/65R15	88	T	5 1/2J	560	250	621	189	8.0
185/65R15	88	H	5 1/2J	560	250	621	189	8.0
185/65R15 XL	92	T	5 1/2J	630	290	621	189	8.0
185/70R13	86	T	5 1/2J	530	250	590	189	8.0

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
185/70R14	88	T	5 1/2J	560	250	616	189	8.0
185/70R14	88	H	5 1/2J	560	250	616	189	8.0
195/50R15	82	H	6J	475	250	577	201	8.0
195/50R15	82	V	6J	475	250	577	201	8.0
195/50R16	84	V	6J	500	250	602	201	8.0
195/50R16 XL	88	V	6J	560	290	602	201	8.0
195/55R15	85	H	6J	515	250	595	201	8.0
195/55R15	85	V	6J	515	250	595	201	8.0
195/55R16	87	H	6J	545	250	620	201	8.0
195/55R16	87	V	6J	545	250	620	201	8.0
195/60R14	86	H	6J	530	250	590	201	8.0
195/60R15	88	H	6J	560	250	615	201	8.0
195/60R15	88	V	6J	560	250	615	201	8.0
195/65R14	89	H	6J	580	250	610	201	8.0
195/65R15	91	H	6J	615	250	635	201	8.0
195/65R15	91	T	6J	615	250	635	201	8.0
195/65R15	91	V	6J	615	250	635	201	8.0
195/65R15 XL	95	T	6J	690	290	635	201	8.0
195/70R15 XL	97	T	6J	730	290	655	201	8.0
195/70R14	91	T	6J	615	250	630	201	8.0
195/70R14	91	H	6J	615	250	630	201	8.0
205/40R17 XL	84	W	7 1/2J	500	290	596	212	8.0
205/55R15	88	V	6 1/2J	560	250	607	214	8.0
205/55R16	91	H	6 1/2J	615	250	632	214	8.0
205/55R16	91	V	6 1/2J	615	250	632	214	8.0
205/55R16 XL	94	V	6 1/2J	670	290	632	214	8.0
205/60R15	91	H	6J	615	250	627	209	8.0
205/60R15	91	V	6J	615	250	627	209	8.0
205/60R16	92	H	6J	630	250	652	209	8.0
205/60R16	92	V	6J	630	250	652	209	8.0
205/65R15	94	H	6J	670	250	647	209	8.0
205/65R15	94	V	6J	670	250	647	209	8.0
205/70R15	96	H	6J	710	250	669	209	8.0
215/60R16 XL	99	V	6 1/2J	775	290	664	221	8.0
215/65R15 XL	100	H	6 1/2J	800	290	661	221	8.5
215/65R16	98	H	6 1/2J	750	250	686	221	8.5
225/60R15	96	V	6 1/2J	710	250	651	228	8.0
225/60R16 XL	102	V	6 1/2J	850	290	676	228	8.5



GREEN2 4S

All Season High Performance

1. Excellent handling;
2. Low rolling resistance for better fuel efficiency;
3. All season tire which is applicable to different weather and road conditions.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
165/70R14	81	T	5J	462	250	588	170	7.0
175/65R14	82	T	5J	475	250	584	177	7.0
175/65R15	84	H	5J	500	250	609	177	7.0
185/60R14 XL	86	H	5 1/2J	530	290	578	189	7.0
185/60R15 XL	88	V	5 1/2J	560	290	603	189	7.0
185/65R14	86	H	5 1/2J	530	250	596	189	7.0
185/65R15 XL	92	V	5 1/2J	630	290	621	189	7.0
195/55R15 XL	89	V	6J	580	290	595	201	7.0
195/55R16 XL	91	H	6J	615	290	620	201	7.0
195/60R15 XL	92	V	6J	630	290	615	201	7.0
195/65R15 XL	95	V	6J	690	290	635	201	7.0
205/50R17 XL	93	V	6 1/2J	650	290	638	214	7.0
205/55R16 XL	94	V	6 1/2J	670	290	632	214	7.0
205/60R16 XL	96	V	6J	710	290	652	209	7.0
205/65R15 XL	99	V	6J	775	290	647	209	7.0
215/50R17 XL	95	V	7J	690	290	648	226	7.0
215/55R16 XL	97	V	7J	730	290	642	226	7.0
215/55R17 XL	98	V	7J	750	290	668	226	7.0
215/60R16 XL	99	V	6 1/2J	775	290	664	221	7.0
215/60R17 XL	100	V	6 1/2J	800	290	690	221	7.0
215/65R16 XL	102	V	6 1/2J	850	290	686	221	7.0
225/50R17 XL	98	V	7J	750	290	658	233	7.0
225/45R17 XL	94	V	7 1/2J	670	290	634	225	7.0
225/55R17 XL	101	V	7J	825	290	680	233	7.0



SPORT GREEN

High handling performance

1. Superior grip and handling performance;
2. Excellent stability.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
185/50R16	81	V	6J	462	250	592	194	7.5
185/55R16 XL	87	V	6J	545	290	610	194	7.5
195/45R15	78	V	6 1/2J	425	250	557	195	7.7
195/45R16 XL	84	V	6 1/2J	500	290	582	195	7.7
195/50R15	82	H	6J	475	250	577	201	7.7

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195/50R15	82	V	6J	475	250	577	201	7.7
195/50R16	84	V	6J	500	250	602	201	7.7
205/45R16	83	W	7J	487	250	590	206	7.7
205/45R17 XL	88	W	7J	560	290	616	206	7.7
205/50R16	87	V	6 1/2J	545	250	612	214	7.7
205/50R16	87	W	6 1/2J	545	250	612	214	7.7
205/50R17 XL	93	W	6 1/2J	650	290	638	214	7.7
205/55R16	91	W	6 1/2J	615	250	632	214	7.7
215/35ZR18 XL	84	W	7 1/2J	500	290	607	218	7.7
215/40R17 XL	87	W	7 1/2J	545	290	604	218	7.7
215/40R18 XL	89	W	7 1/2J	580	290	629	218	7.5
215/45R17 XL	91	W	7J	615	290	626	213	7.7
215/45R18 XL	93	W	7J	650	290	651	213	7.5
215/50R17 XL	95	W	7J	690	290	648	226	7.7
215/55R16 XL	97	W	7J	730	290	642	226	7.7
215/55R16 XL	97	V	7J	730	290	642	226	7.7
215/55R17	94	W	7J	670	250	668	226	7.7
225/30R20 XL	85	W	8J	515	290	644	230	7.7
225/35ZR19 XL	88	W	8J	560	290	641	230	7.7
225/40R18	92	W	8J	630	290	637	230	7.7
225/40R19 XL	93	W	8J	650	290	663	230	7.5
225/45R17 XL	94	W	7 1/2J	670	290	634	225	7.7
225/45R18 XL	95	W	7 1/2J	690	290	659	225	7.7
225/50R16	92	V	7J	630	250	632	233	7.7
225/50R17 XL	98	W	7J	750	290	658	233	7.7
225/55R16	95	V	7J	690	250	654	233	7.7
225/55R16 XL	99	W	7J	775	290	654	233	7.7
225/55R17 XL	101	W	7J	825	290	680	233	7.7
235/35R19 XL	91	W	8 1/2J	615	290	647	241	7.7
235/40R18 XL	95	W	8 1/2J	690	290	645	241	7.7
235/45R17 XL	97	W	8J	730	290	644	236	7.7
235/50R18 XL	101	Y	7 1/2J	825	290	693	245	7.7
235/55R17 XL	103	W	7 1/2J	875	290	690	245	8.2
245/35R19 XL	93	W	8 1/2J	650	290	655	248	7.5
245/40ZR17	91	W	8 1/2J	615	250	628	248	7.7
245/40R18 XL	97	W	8 1/2J	730	290	653	248	7.7
245/40R19 XL	98	W	8 1/2J	750	290	679	248	7.5
245/40R20 XL	99	W	8 1/2J	775	290	704	248	7.5
245/45R17 XL	99	W	8J	775	290	652	243	7.7
245/45R18 XL	100	W	8J	800	290	677	243	7.7
245/45R20 XL	103	Y	8J	875	290	728	243	7.5
255/30R19 XL	91	W	9J	615	290	637	260	7.5
255/35R19 XL	96	W	9J	710	290	661	260	7.5
255/40ZR17	94	W	9J	670	250	636	260	7.7
255/45R18 XL	103	W	8 1/2J	875	290	687	255	7.7
265/30ZR19 XL	93	W	9 1/2J	650	290	643	271	7.7
275/30R19 XL	96	W	9 1/2J	710	290	649	278	7.5
275/35R19 XL	100	W	9 1/2J	800	290	675	278	7.5



LAND SPORT

Super Wear Resistance

1. Ultra mileage tire;
2. Low noise;
3. Improved water evacuation.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
185/60R15	84	H	5 1/2J	500	250	603	189	8.0
185/65R14	86	H	5 1/2J	530	250	596	189	7.7
185/65R15	88	H	5 1/2J	560	250	621	189	7.7
195/60R15	88	H	6J	560	250	615	201	8.5
195/65R15	91	H	6J	615	250	635	201	8.5
205/50R17 XL	93	V	6 1/2J	650	290	638	214	7.5
205/55R16	91	V	6 1/2J	615	250	632	214	8.5
205/60R15	91	H	6J	615	250	627	209	8.5
205/60R16	92	V	6J	630	250	652	209	8.7
205/65R15	94	V	6J	670	250	647	209	8.5
205/65R16	95	H	6J	690	250	672	209	8.5
215/45R17 XL	91	V	7J	615	290	626	213	7.5
215/50R17 XL	95	V	7J	690	290	648	226	7.5
215/55R16 XL	97	V	7J	730	290	642	226	7.5
215/55R17	94	V	7J	670	250	668	226	7.5
215/60R16	95	V	6 1/2J	690	250	664	221	8.7
215/65R17	99	T	6 1/2J	775	250	712	221	8.8
215/70R15	98	H	6 1/2J	750	250	683	221	9.1
225/40R18 XL	92	V	8J	630	290	637	230	7.5
225/45R17 XL	94	V	7 1/2J	670	290	634	225	7.5
225/45R18 XL	95	V	7 1/2J	690	290	659	225	7.5
225/50R17 XL	98	V	7J	750	290	658	233	7.5
225/65R16	100	H	6 1/2J	800	250	698	228	8.7
235/45R17 XL	97	V	8J	730	290	644	236	7.8
245/45R18 XL	100	V	8J	800	290	677	243	7.5



UHP+

Ultra high performance tire

Strong grip with good steering performance;

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/50ZR17 XL	93	W	6 1/2J	650	290	638	214	7.9
215/35ZR18 XL	84	Y	7 1/2J	500	290	607	218	7.9
215/40ZR18 XL	89	W	7 1/2J	580	290	629	218	7.9
225/35ZR20 XL	90	Y	8J	600	290	666	230	7.9
235/50ZR18	97	W	7 1/2J	730	250	693	245	7.9
245/35ZR19 XL	93	Y	8 1/2J	650	290	655	248	7.9
245/35ZR20 XL	95	Y	8 1/2J	690	290	680	248	7.9
245/45ZR17	95	W	8J	690	250	652	243	7.9
245/45ZR18 XL	100	W	8J	800	290	677	243	7.9
255/30R24 XL	97	W	9J	730	290	764	260	8.5
255/35ZR20 XL	97	Y	9J	730	290	686	260	7.9
265/35R22 XL	102	V	9 1/2J	850	290	745	271	8.5
265/35ZR18 XL	97	Y	9 1/2J	730	290	643	271	7.9
275/25R24 XL	95	W	10J	690	290	748	283	8.5
275/30R20 XL	97	W	9 1/2J	730	290	674	278	8.5
275/40R20 XL	106	V	9 1/2J	950	290	728	278	8.5
275/45R20 XL	110	V	9J	1060	290	756	273	8.5
275/55R20 XL	117	V	8 1/2J	1285	290	810	284	8.5
285/30R20 XL	99	W	10J	775	290	680	290	8.5
285/50R20 XL	116	V	9J	1250	290	794	297	8.5
295/30R26 XL	107	W	10 1/2J	975	290	838	301	8.5
305/30R26 XL	109	W	11J	1030	290	844	313	8.5
305/35R24 XL	112	V	11J	1120	290	824	313	8.5
305/40R22 XL	114	V	11J	1180	290	803	313	8.5
305/45R22 XL	118	V	10J	1320	290	833	303	8.5



SUV Tire



SUV Tire | PCR TIRE



SPORT GREEN SUV

High handling performance

1. Excellent steering and handling performance.
2. Superior drainage performance.
3. Lower noise.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
215/60R17	96	H	6 1/2J	710	250	690	221	8.0
215/65R16	98	H	6 1/2J	750	250	686	221	8.5
215/70R16	100	H	6 1/2J	800	250	708	221	8.5
225/55R18	98	V	7J	750	250	705	233	8.0
225/65R17	102	H	6 1/2J	850	250	724	228	8.0
225/70R16	103	H	6 1/2J	875	250	722	228	8.5
235/50R18	97	W	7 1/2J	730	250	693	245	8.2
235/55R17	99	V	7 1/2J	775	250	690	245	8.2
235/55R18	100	V	7 1/2J	800	250	715	245	8.0
235/60R16	100	H	7J	800	250	688	240	8.5
235/60R18 XL	107	W	7J	975	290	739	240	8.5
235/65R17 XL	108	V	7J	1000	290	738	240	8.5
235/70R16	106	H	7J	950	250	736	240	8.5
245/65R17	107	H	7J	975	250	750	248	8.5
245/70R16	107	H	7J	975	250	750	248	8.5
255/50R19 XL	107	W	8J	975	290	739	265	8.2
255/55R18 XL	109	W	8J	1030	290	737	265	8.2
255/65R16	109	H	7 1/2J	1030	250	738	260	8.5
255/70R18	113	H	7 1/2J	1150	250	815	260	8.0
265/65R17	112	H	8J	1120	250	776	272	8.5
265/70R16	112	H	8J	1120	250	778	272	8.5
275/40R20 XL	106	W	9 1/2J	950	290	728	278	8.2
275/45R20 XL	110	W	9J	1060	290	756	273	8.2
295/35R21 XL	107	Y	10 1/2J	975	290	739	301	8.0



FORCE UHP

High handling performance SUV UHP tire

1. Excellent dry and wet handling performance;
2. Asymmetric tread pattern design for better drainage performance inside and grip performance outside, excellent steering performance.
3. Wide tread surface for superior comfortable ride.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195/35R18 XL	79	W	7J	437	290	597	200	7.7
195/40R17 XL	81	V	7J	462	290	588	200	7.7
195/45R16 XL	84	V	6 1/2J	500	290	582	195	7.7
195/45R17 XL	85	W	6 1/2J	515	290	608	195	7.7
205/35R18 XL	81	W	7 1/2J	462	290	601	212	7.7
205/40R18 XL	86	W	7 1/2J	530	290	621	212	7.7
205/45R17 XL	88	W	7J	560	290	616	206	7.7
205/50R16	87	W	6 1/2J	545	250	612	214	7.7
205/50R17 XL	93	W	6 1/2J	650	290	638	214	7.7
205/55R16	91	W	6 1/2J	615	250	632	214	7.7
215/30R20 XL	82	V	7 1/2J	475	290	641	218	7.7
215/35R19 XL	85	V	7 1/2J	515	290	633	218	7.7
215/40R18	85	Y	7 1/2J	515	250	629	218	7.8
215/45R17 XL	91	W	7J	615	290	626	213	7.8
215/45R18 XL	93	Y	7J	650	290	651	213	7.8
215/50R16 XL	94	W	7J	670	290	622	226	7.7
215/50R17 XL	95	W	7J	690	290	648	226	7.8
215/55R16 XL	97	W	7J	730	290	642	226	7.8
215/55R17	94	W	7J	670	250	668	226	7.8
225/30R20	85	W	8J	515	250	662	260	7.9
225/35R18 XL	87	W	8J	545	290	615	230	7.7
225/35R19 XL	88	W	8J	560	290	641	230	7.7
225/35R20 XL	90	W	8J	600	290	666	230	7.9
225/40R18 XL	92	Y	8J	630	290	637	230	7.9
225/40R19 XL	93	Y	8J	650	290	663	230	7.9
225/45R17 XL	94	W	7 1/2J	670	290	634	225	7.9
225/45R18 XL	95	Y	7 1/2J	690	290	659	225	7.9
225/45R19 XL	96	Y	7 1/2J	710	290	685	225	7.9
225/50R16	92	W	7J	630	250	632	233	7.9
225/50R17 XL	98	W	7J	750	290	658	233	7.9
225/50R18	95	W	7J	690	250	683	233	7.9
225/55R16	95	W	7J	690	250	654	233	7.9
225/55R17	97	W	7J	730	250	680	233	7.9
235/30R20 XL	88	W	8 1/2J	560	290	650	242	7.7
235/35R19 XL	91	Y	8 1/2J	615	290	647	241	7.7
235/35R20 XL	92	W	8 1/2J	630	290	672	241	7.7
235/35R21	89	W	8 1/2J	580	250	702	241	7.7
235/40R18 XL	95	Y	8 1/2J	690	290	645	241	8.0
235/40R19 XL	96	Y	8 1/2J	710	290	671	241	8.0
235/45R17 XL	97	W	8J	730	290	644	236	8.0
235/45R18 XL	98	Y	8J	750	290	669	236	8.0
235/50R17	96	W	7 1/2J	710	250	668	245	8.0
235/50R18	97	Y	7 1/2J	730	250	693	245	8.0
235/55R17	99	W	7 1/2J	775	250	690	245	8.0
235/55R19 XL	105	Y	7 1/2J	925	290	741	245	8.0
245/30R20 XL	90	W	8 1/2J	600	290	656	248	7.7
245/30R21 XL	91	W	8 1/2J	615	290	681	248	7.7
245/30R22 XL	92	W	8 1/2J	630	290	707	248	8.1
245/35R19 XL	93	W	8 1/2J	650	290	655	248	7.7
245/35R20 XL	95	W	8 1/2J	690	290	680	248	8.1
245/35R21 XL	96	W	8 1/2J	710	290	705	248	7.7
245/40R17	91	W	8 1/2J	615	250	628	248	8.1
245/40R18 XL	97	Y	8 1/2J	730	290	653	248	8.1
245/40R19 XL	98	Y	8 1/2J	750	290	679	248	8.1
245/40R20 XL	99	Y	8 1/2J	775	290	704	248	8.1
245/45R17 XL	99	W	8J	775	290	652	243	8.1
245/45R18 XL	100	Y	8J	800	290	677	243	8.1
245/45R19 XL	102	W	8J	850	290	703	243	8.1
245/45R20 XL	103	Y	8J	875	290	728	243	8.1
245/50R18	100	Y	7 1/2J	800	250	703	253	8.1
245/50R19 XL	105	W	7 1/2J	925	290	729	253	8.1
245/50R20	102	V	7 1/2J	850	250	754	253	8.2
245/55R19	103	V	7 1/2J	875	250	753	253	8.2
245/65R17 XL	111	H	7J	1090	290	750	248	8.2
255/30R20 XL	92	W	9J	630	290	662	260	7.7
255/30R21 XL	93	W	9J	650	290	687	260	7.7
255/30R22 XL	95	W	9J	690	290	713	260	8.2



SUV Tire | PCR TIRE



Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
255/30R24 XL	97	W	9J	730	290	764	260	8.2
255/30R26 XL	99	W	9J	775	290	814	260	8.2
255/35R18 XL	94	Y	9J	670	290	635	260	8.2
255/35R19 XL	96	Y	9J	710	290	661	260	8.2
255/35R20 XL	97	Y	9J	730	290	686	260	8.2
255/40R17 XL	98	W	9J	750	290	636	260	7.7
255/40R18 XL	99	Y	9J	775	290	661	260	8.2
255/40R19 XL	100	Y	9J	800	290	687	260	8.2
255/40R20 XL	101	W	9J	825	290	712	260	8.2
255/45R18 XL	103	W	8 1/2J	875	290	687	255	8.2
255/45R19 XL	104	Y	8 1/2J	900	290	713	255	8.2
255/45R20 XL	105	Y	8 1/2J	925	290	738	255	8.2
255/50R19 XL	107	Y	8J	975	290	739	265	8.2
255/50R20 XL	109	Y	8J	1030	290	764	265	8.2
255/55R18 XL	109	W	8J	1030	290	737	265	8.2
255/60R19	109	H	7 1/2J	1030	250	789	260	8.2
265/30R19 XL	93	W	9 1/2J	650	290	643	271	7.7
265/30R22 XL	97	W	9 1/2J	730	290	719	271	7.7
265/35R18 XL	97	Y	9 1/2J	730	290	643	271	8.3
265/35R20 XL	99	Y	9 1/2J	775	290	694	271	8.3
265/35R22 XL	102	Y	9 1/2J	850	290	745	271	7.7
265/40R18 XL	101	Y	9 1/2J	825	290	669	271	8.3
265/40R19 XL	102	Y	9 1/2J	850	290	695	271	8.3
265/40R21 XL	105	Y	9 1/2J	925	290	745	271	8.2
265/45R20 XL	108	Y	9 1/2J	950	290	771	271	8.2
265/50R19 XL	110	W	8 1/2J	1000	290	746	266	8.3
265/50R20 XL	110	V	8 1/2J	1060	290	749	277	8.3
275/25R24 XL	96	W	10J	710	290	774	277	8.2
275/25R26 XL	98	W	10J	750	290	748	283	8.2
275/25R28 XL	99	W	10J	775	290	798	283	8.2
275/25R30 XL	99	W	10J	775	290	852	281	8.2
275/30R19 XL	101	W	10J	825	290	900	283	8.2
275/30R20 XL	96	W	9 1/2J	710	290	649	278	8.2
275/30R24 XL	101	W	9 1/2J	730	290	674	278	8.4
275/35R18	95	Y	9 1/2J	690	250	776	278	8.2
275/35R19 XL	100	Y	9 1/2J	800	290	649	278	8.4
275/35R20 XL	102	Y	9 1/2J	850	290	675	278	8.4
275/35R21	99	W	9 1/2J	775	250	700	278	8.4
275/40R17	98	W	9 1/2J	750	250	725	278	8.2
275/40R18 XL	103	Y	9 1/2J	875	290	652	278	8.4
275/40R19 XL	105	Y	9 1/2J	925	290	677	278	8.4
275/40R20 XL	106	Y	9 1/2J	950	290	703	278	8.4
275/45R19 XL	108	W	9J	1000	290	728	278	8.4
275/45R20 XL	110	W	9J	1060	290	731	273	8.2
275/55R19	111	W	8 1/2J	1090	250	756	273	8.4
285/25R20 XL	93	W	10 1/2J	650	290	785	284	8.2
285/25R22 XL	95	Y	10 1/2J	690	290	650	295	7.7
285/30R21 XL	100	Y	10J	800	290	701	295	7.7
285/35R19 XL	103	Y	10J	875	290	705	290	7.7
285/35R22 XL	106	W	10J	950	290	683	290	8.5
285/40R22 XL	110	V	10J	1060	290	759	290	8.5
285/45R19 XL	111	W	9 1/2J	1090	290	787	290	8.2
285/45R22 XL	114	V	9 1/2J	1180	290	739	285	8.2
285/50R20	112	V	9J	1120	250	815	285	8.2
295/25R20 XL	95	Y	10 1/2J	690	290	794	297	8.2
295/25R22 XL	97	W	10 1/2J	730	290	656	301	7.7
295/25R28 XL	103	V	10 1/2J	875	290	707	301	7.7
295/30R19 XL	100	W	10 1/2J	800	290	859	301	8.2
295/30R26 XL	107	W	10 1/2J	975	290	661	301	7.7
295/35R21 XL	107	Y	10 1/2J	975	290	838	301	8.2
295/35R24 XL	110	V	10 1/2J	1060	290	739	301	8.6
305/25R20 XL	97	Y	11J	730	290	816	301	8.2
305/25R22 XL	99	Y	11J	775	290	660	313	8.2
305/30R18	97	W	11J	730	250	711	313	8.2
305/30R26 XL	109	W	11J	1030	290	644	313	8.2
305/35R24 XL	112	V	11J	1120	290	844	313	8.2
305/40R22 XL	114	V	11J	1180	290	824	313	8.2
305/45R22 XL	118	V	10J	1320	290	803	313	8.2
315/35R20 XL	110	W	11J	1060	290	833	303	8.2



Legend HP

SUV tire with low rolling resistance and low noise

1. Excellent handling performance;
2. Enhanced drainage performance to effectively reduce risk of hydroplaning;
3. Superior longitudinal stability for more comfortable ride;
4. Low noise to offer a quiet ride.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/70R15	—	96	H	6J	710	250	669	209	8.5
215/60R17	—	96	H	6 1/2J	710	250	690	221	8.5
215/65R16 XL	—	102	H	6 1/2J	850	290	686	221	8.5
215/70R16	—	100	H	6 1/2J	800	250	708	221	8.5
225/55R17 XL	—	101	V	7J	825	290	680	233	8.2
225/60R18	—	100	H	6 1/2J	800	250	727	228	8.5
225/65R16	—	100	H	6 1/2J	800	250	698	228	8.5
225/65R17	—	102	H	6 1/2J	850	250	724	228	8.5
225/75R16	—	104	H	6J	900	250	744	223	8.5
235/55R17 XL	—	103	V	7 1/2J	875	290	690	245	8.2
235/55R18 XL	—	104	V	7 1/2J	900	290	715	245	8.2
235/60R16	—	100	H	7J	800	250	688	240	8.5
235/60R17 XL	—	106	V	7J	950	290	714	240	8.5
235/60R18 XL	—	107	V	7J	975	290	739	240	8.5
235/65R17 XL	—	108	V	7J	1000	290	738	240	8.5
235/65R18	—	106	H	7J	950	250	763	240	8.5
235/70R16	—	106	H	7J	950	250	736	240	8.5
245/60R18	—	105	V	7J	925	250	751	248	8.5
245/65R17 XL	—	111	H	7J	1090	290	750	248	8.5
245/70R16 XL	—	111	H	7J	1090	290	750	248	8.5
255/55R18 XL	—	109	V	8J	1030	290	737	265	8.2
255/55R19 XL	—	111	V	8J	1090	290	763	265	8.2
255/60R17	—	106	H	7 1/2J	950	250	738	260	8.5
255/60R18 XL	—	112	V	7 1/2J	1120	290	763	260	8.5
255/65R17	—	110	H	7 1/2J	1060	250	764	260	8.5
265/60R18	—	110	H	8J	1060	250	775	272	8.5
265/65R17	—	112	H	8J	1120	250	776	272	8.5
265/70R16	—	112	H	8J	1120	250	778	272	8.5
275/55R17	—	109	V	8 1/2J	1030	250	734	284	8.2
275/60R18	—	113	H	8J	1150	250	787	279	8.5
275/70R16	—	114	H	8J	1180	250	792	279	8.5



Touring Plus II

Low rolling resistance and low noise SUV tire, dry performance and handling performance.

1. Excellent handling performance;
2. Good drainage performance to effectively reduce risk of hydroplaning;
3. Superior longitudinal stability for more comfortable ride;
4. Low noise to offer a quiet ride.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
215/65R16 XL	—	102	V	6 1/2J	850	290	686	221	8.5
215/70R16	—	100	H	6 1/2J	800	250	708	221	8.5
215/60R17	—	96	H	6 1/2J	710	250	690	221	8.5
225/55R17 XL	—	101	V	7J	825	290	680	233	8.2
225/60R16	—	98	V	6 1/2J	750	250	676	228	8.5
225/60R17	—	99	V	6 1/2J	775	250	702	228	8.5
225/65R17	—	102	H	6 1/2J	850	250	724	228	8.5
235/55R17 XL	—	103	W	7 1/2J	875	290	690	245	8.2
235/55R18 XL	—	104	V	7 1/2J	900	290	715	245	8.2
235/60R17 XL	—	106	V	7J	950	290	714	240	8.5
235/60R18 XL	—	107	V	7J	975	290	739	240	8.5
235/65R17 XL	—	108	V	7J	1000	290	738	240	8.5
235/65R18	—	106	H	7J	950	250	763	240	8.5
235/70R16	—	106	H	7J	950	250	736	240	8.5
245/60R18	—	105	V	7J	925	250	751	248	8.5
245/65R17 XL	—	111	H	7J	1090	290	750	248	8.5
255/55R18 XL	—	109	V	8J	1030	290	737	265	8.2



Desperado II

SUV Tire for Urban Road Use, with Low Noise and good dry/wet performance.

1. High drainage capability;
2. High comfort and low noise;
3. Excellent handling performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
LT225/75R16	10PR	115/112	S	6J	D1120 S1215	550	744	223	11.2
235/75R15 XL	—	109	T	6 1/2J	1030	290	733	235	9.7
245/70R17	—	110	T	7J	1060	250	776	248	9.7
LT245/75R16	10PR	120/116	S	7J	D1250 S1400	550	774	248	11.2
245/75R16	—	111	T	7J	1090	250	774	248	9.7
265/65R17	—	112	T	8J	1120	250	776	272	9.7
265/70R16	—	112	T	8J	1120	250	778	272	9.5
265/70R17	—	115	T	8J	1215	250	804	272	10.5
LT265/70R17	10PR	121/118	S	8J	D1320 S1450	550	804	272	11.2
LT265/75R16	10PR	123/120	S	7 1/2J	D1400 S1550	550	804	267	11.2
265/75R16	—	116	T	7 1/2J	1250	250	804	267	9.7
275/55R20 XL	—	117	H	8 1/2J	1285	290	810	284	9.0
275/65R18	—	116	H	8J	1250	250	815	279	9.5
275/60R20	—	115	H	8J	1215	250	838	279	9.0



PRIVA H/T II

SUV Tire for Urban Road Use, with Low Noise and Good Dry/wet Performance.

1. High drainage capability;
2. High comfort and low noise;
3. Excellent handling performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
LT215/85R16	10PR	115/112	Q	6J	D1120 S1215	550	772	216	11.2
LT225/75R16	10PR	115/112	Q	6J	D1120 S1215	550	744	223	11.2
LT245/75R16	10PR	120/116	R	7J	D1260 S1380	550	774	248	11.2
LT265/70R17	10PR	121/118	R	8J	D1320 S1450	550	804	272	11.2
LT265/75R16	10PR	123/120	R	7 1/2J	D1400 S1550	550	804	267	11.2
LT235/85R16	10PR	120/116	R	6 1/2J	D1260 S1380	550	806	235	11.2
215/70R16	—	100	T	6 1/2J	800	250	708	221	9.0
225/70R16 XL	—	107	T	6 1/2J	975	290	722	228	9.5
235/70R16 XL	—	109	T	7J	1030	290	736	240	9.5
245/70R16 XL	—	111	T	7J	1090	290	750	248	9.5
245/70R17	—	110	T	7J	1060	250	776	248	9.5
245/75R16	—	111	T	7J	1090	250	774	248	9.5
255/70R15	—	108	T	7 1/2J	1000	250	739	260	9.5
255/70R16	—	111	T	7 1/2J	1090	250	764	260	9.5
265/70R16	—	112	T	8J	1120	250	778	272	9.5
265/70R17	—	115	T	8J	1215	250	804	272	9.5
265/65R17	—	112	H	8J	1120	250	776	272	9.5
275/55R20 XL	—	117	V	8 1/2J	1285	290	810	284	9.0
275/65R17 XL	—	119	H	8J	1360	290	790	279	9.5
285/65R17	—	116	S	8 1/2J	1250	250	802	292	9.5



PRIVA A/T

All Terrain Tire with High Wear Resistance

1. Excellent wet performance;
2. Large angle grooves to improve self-cleaning ability;
3. An optimal balance between performance on road and off road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205R16LT	8PR	110/108	T	6J	D1000 S1060	450	734	208	12.7
LT235/85R16	10PR	120/116	Q	6 1/2J	D1260 S1380	550	806	235	12.7
LT245/75R16	10PR	120/116	Q	7J	D1260 S1380	550	774	248	12.7
LT265/70R17	10PR	121/118	R	8J	D1320 S1450	550	804	272	12.7
LT265/75R16	10PR	123/120	R	7 1/2J	D1400 S1550	550	804	267	12.7
LT285/75R16	10PR	126/123	R	8J	D1550 S1700	550	834	286	12.7
31X10.50R15LT	6PR	109	R	8 1/2J	1030	350	775	268	12.7
235/70R16	—	106	T	7J	950	250	736	240	11.0
235/75R15 XL	—	109	T	6 1/2J	1030	290	733	235	11.0
245/65R17 XL	—	111	T	7J	1090	290	750	248	11.0
245/70R16 XL	—	111	T	7J	1090	290	750	248	11.0
265/70R16	—	112	T	8J	1120	250	778	272	11.0
265/70R17	—	115	T	8J	1215	250	804	272	11.0



PRIVA M/T

Mud-terrain Tire

1. High floatation;
2. Higher load-carrying capacity;
3. Excellent self-cleaning performance;
4. Aggressive tread pattern and sidewall design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
LT265/75R16 OWL	10PR	123/120	Q	7 1/2J	D1400 S1550	550	804	267	14.7
LT265/70R17 OWL	10PR	121/118	Q	8J	D1320 S1450	550	810	272	14.4
LT275/70R18 OWL	10PR	125/122	Q	8J	D1500 S1650	550	849	279	14.4
LT285/70R17 OWL	10PR	121/118	Q	8 1/2J	D1320 S1450	550	838	292	14.4
LT285/75R16 OWL	10PR	126/123	Q	8J	D1550 S1700	550	834	286	14.4
LT295/60R20	10PR	126/123	Q	8 1/2J	D1550 S1700	550	868	299	15.9
LT295/70R17	10PR	121/118	Q	8 1/2J	D1320 S1450	550	852	299	14.7
LT295/70R18	10PR	129/126	Q	8 1/2J	D1700 S1850	550	877	299	14.7
LT305/60R18	10PR	121/118	Q	9J	D1320 S1450	450	829	311	15.9
LT305/65R17	10PR	121/118	Q	9J	D1320 S1450	450	834	311	15.9
LT305/70R16 OWL	10PR	124/121	Q	9J	D1450 S1600	450	840	311	14.4
LT305/70R18	10PR	126/123	Q	9J	D1550 S1700	450	891	311	15.9
LT315/70R17	10PR	121/118	Q	9 1/2J	D1320 S1450	450	880	323	15.9
LT315/75R16 OWL	10PR	127/124	Q	8 1/2J	D1600 S1750	450	884	313	14.4
LT375/65R16	8PR	126/123	Q	11J	D1550 S1700	350	900	382	15.9
31X10.50R15LT OWL	6PR	109	Q	8 1/2J	1030	350	781	268	14.3
33X12.50R15LT OWL	6PR	108	Q	10J	1000	250	832	318	14.3
33X12.50R18LT OWL	10PR	118	Q	10J	1320	450	832	318	15.8
33X12.50R20LT OWL	10PR	114	Q	10J	1180	450	832	318	15.8
33X12.50R22LT	10PR	109	Q	10J	1030	450	826	318	15.8
35X12.50R15LT	6PR	113	Q	10J	1150	250	883	318	15.9
35X12.50R17LT OWL	10PR	121	Q	10J	1450	450	883	318	15.8
35X12.50R18LT OWL	10PR	123	Q	10J	1550	450	883	318	15.9
35X12.50R20LT OWL	10PR	121	Q	10J	1450	450	883	318	15.8
35X12.50R22LT OWL	10PR	117	Q	10J	1285	450	877	318	15.8
36X15.50R20LT	10PR	126	Q	12 1/2J	1700	450	908	395	15.9
37X12.50R17LT	8PR	124	Q	10J	1600	350	934	318	15.9
37X13.50R18LT	8PR	124	Q	11J	1600	350	934	345	15.9
37X13.50R20LT	10PR	127	Q	11J	1750	450	934	345	15.9
38X15.50R20LT OWL	8PR	125	Q	12 1/2J	1650	350	959	395	15.9
40X13.50R17LT	6PR	121	Q	11J	1450	250	1010	345	15.9
40X14.50R20LT	8PR	128	Q	11 1/2J	1800	350	1010	367	15.9



CROSSWIND 4x4 HP

SUV tire with low rolling resistance and low noise

1. Excellent handling performance;
2. Enhanced drainage performance to effectively reduce risk of hydroplaning;
3. Superior longitudinal stability for more comfortable ride;
4. Low noise to offer a quiet ride.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
255/55R19 XL	111	V	8J	1090	290	763	265	8.2



CROSSWIND A/T

All Terrain Tire

1. Excellent wet performance;
2. Large angle grooves to improve self-cleaning ability;
3. An optimal balance between performance on road and off road.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
265/65R17	112	T	8J	1120	250	776	272	10.7
265/60R18	110	T	8J	1060	250	775	272	11.0



SUV Tire | PCR TIRE



CROSSWIND M/T

Mud-Terrain Tire

1. High floatation;
2. Higher load-carrying capacity;
3. Excellent Self-cleaning performance;
4. Aggressive tread pattern and sidewall design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
LT225/75R16	8PR	110/107	Q	6J	D975 S1060	450	750	223	13.7
LT235/85R16	10PR	120/116	Q	6 1/2J	D1260 S1380	550	806	235	13.7
LT245/75R16	10PR	120/116	Q	7J	D1260 S1380	550	774	248	13.7
LT265/75R16	10PR	123/120	Q	7 1/2J	D1400 S1550	550	810	267	14.7
LT285/75R16	10PR	126/123	Q	8J	D1550 S1700	550	840	286	14.7
LT305/70R17	8PR	119/116	Q	9J	D1250 S1360	350	866	311	14.7
30X9.50R15LT	6PR	104	Q	7 1/2J	900	350	756	240	13.7
31X10.50R15LT	6PR	109	Q	8 1/2J	1030	350	781	268	14.7



Light Truck Tire



GREENVAN

High wear performance

- 1. Excellent grip and handling performance;
- 2. Better grip performance on slippery road together with high safety coefficient;
- 3. Suitable for commercial vehicles.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
155R12C	8PR	88/86	N	4.50B	D530 S560	450	550	157	8.4
155R13C	8PR	90/88	R	4.50B	D560 S600	450	578	157	8.4
155R13C	8PR	90/88	S	4.50B	D560 S600	450	578	157	8.4
165R13C	8PR	94/93	R	4.50B	D650 S670	450	596	167	8.7
165/70R14C	6PR	89/87	R	5J	D545 S580	350	588	170	8.7
175R13C	8PR	97/95	R	5.00B	D690 S730	450	610	177	8.7
175R14C	8PR	99/98	R	5J	D750 S775	450	634	178	8.7
175/65R14C	6PR	90/88	T	5J	D560 S600	375	584	177	9.2
175/75R16C	8PR	101/99	S	5J	D775 S825	450	668	177	9.7
185R14C	8PR	102/100	Q	5 1/2J	D800 S850	450	650	188	9.2
185R15C	8PR	103/102	Q	5 1/2J	D850 S875	450	674	188	9.2
185/75R16C	8PR	104/102	S	5J	D850 S900	475	684	184	9.7
195R14C	8PR	106/104	Q	5 1/2J	D900 S950	450	666	198	9.5
195R15C	8PR	106/104	R	5 1/2J	D900 S950	450	693	196	9.2
195/50R13C	—	104/101	N	6J	D825 S900	650	526	201	6.2
195/55R10C	—	98/96	P	6.00I	D710 S750	250	468	201	6.2
195/60R16C	6PR	99/97	H	6J	D730 S775	375	640	201	9.2
195/65R16C	8PR	104/102	S	6J	D850 S900	475	660	201	9.2
195/70R15C	8PR	104/102	S	6J	D850 S900	450	655	201	9.7
195/75R16C	8PR	107/105	S	5 1/2J	D925 S975	475	698	196	10.2
205R14C	8PR	109/107	Q	6J	D975 S1030	450	686	208	9.7
205R16C	8PR	110/108	T	6J	D1000 S1060	450	736	208	10.2
205/65R15C	6PR	102/100	T	6J	D800 S850	350	647	209	9.2
205/65R16C	8PR	107/105	T	6J	D925 S975	475	672	209	9.3
205/70R15C	8PR	106/104	S	6J	D900 S950	450	669	209	9.5
205/75R16C	8PR	110/108	S	5 1/2J	D1000 S1060	475	714	203	10.2
205/80R16	—	104	S	5 1/2J	900	280	734	201	9.2
215R14C	8PR	112/110	Q	6J	D1060 S1120	450	700	218	9.7
215/60R16C	6PR	103/101	T	6 1/2J	D825 S875	375	664	221	9.2
215/65R16C	8PR	109/107	S	6 1/2J	D975 S1030	475	686	221	9.2
215/70R15C	8PR	109/107	S	6 1/2J	D975 S1030	450	683	221	9.5
215/70R16C	6PR	108/106	T	6 1/2J	D950 S1000	350	708	221	9.2
215/75R16C	8PR	113/111	S	6J	D1090 S1150	475	728	216	10.2
225/65R16C	8PR	112/110	S	6 1/2J	D1060 S1120	475	698	228	9.2
225/70R15C	8PR	112/110	S	6 1/2J	D1060 S1120	450	697	228	9.7
235/65R16C	8PR	115/113	S	7J	D1150 S1215	475	712	240	9.2

Winter Tire

Winter Tire | PCR TIRE



Polarbear 1

Suitable for snow road with excellent handling and grip

1. Excellent snow evacuation;
2. Good handling and traction performance on ice&snow road.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
145/70R12	69	T	4.50B	325	250	509	150	8.5
145/70R13	71	T	4.50B	345	250	534	150	8.5
145/80R13	75	T	4.00B	387	240	562	145	8.5
155/65R13	73	T	4.50B	365	250	532	157	8.5
155/65R14	75	T	4 1/2J	387	250	558	157	8.5
155/70R13	75	T	4.50B	387	250	548	157	8.5
155/80R13	79	T	4.50B	437	240	578	157	8.5
165/60R14 XL	79	T	5J	437	290	554	170	8.5
165/65R13	77	T	5.00B	412	250	544	170	8.5
165/65R14	79	T	5J	437	250	570	170	8.5
165/65R15	81	T	5J	462	250	595	170	8.5
165/70R13	79	T	5.00B	437	250	562	170	8.5
165/70R14	81	T	5J	462	250	588	170	8.5
165/70R14 XL	85	T	5J	515	290	588	170	8.5
175/60R15	81	H	5J	462	250	591	177	8.5
175/65R13	80	T	5.00B	450	250	558	177	8.5
175/65R14	82	T	5J	475	250	584	177	8.5
175/65R14 XL	86	T	5J	530	290	584	177	8.5
175/65R15	84	T	5J	500	250	609	177	8.8
175/70R13	82	T	5.00B	475	250	576	177	8.5
175/70R14	84	T	5J	500	250	602	177	8.5
175/70R14 XL	88	T	5J	560	290	602	177	8.5
175/80R14	88	T	5J	560	240	636	177	8.5
185/60R14	82	T	5 1/2J	475	250	578	189	8.8
185/60R15	84	T	5 1/2J	500	250	603	189	8.8
185/60R15 XL	88	T	5 1/2J	560	290	603	189	8.8
185/65R14	86	T	5 1/2J	530	250	596	189	8.8
185/65R15	88	T	5 1/2J	560	250	621	189	8.8
185/65R15 XL	92	T	5 1/2J	630	290	621	189	8.8
185/70R14	88	T	5 1/2J	560	250	616	189	8.8
195/60R15	88	T	6J	560	250	615	201	8.8
195/60R15	88	H	6J	560	250	615	201	8.8
195/60R15 XL	92	H	6J	630	290	615	201	8.8
195/65R15	91	T	6J	615	250	635	201	8.8
195/65R15	91	H	6J	615	250	635	201	8.8
195/65R15 XL	95	T	6J	690	290	635	201	8.8
195/70R14	91	T	6J	615	250	630	201	8.8
205/60R15	91	H	6J	615	250	627	209	8.8
205/60R16	92	H	6J	630	250	652	209	8.8
205/60R16 XL	96	H	6J	710	290	652	209	8.8
205/65R15	94	H	6J	670	250	647	209	8.8
205/70R15	96	T	6J	710	250	669	209	8.8
215/60R16 XL	99	H	6 1/2J	775	290	664	221	8.8
215/65R16	98	H	6 1/2J	750	250	686	221	8.8
225/60R16 XL	102	V	6 1/2J	850	290	676	228	8.8



Polarbear 2

Excellent handling performance.

1. Excellent handling performance and high comfort;
2. Outstanding snow evacuation;
3. Excellent grip on wet and slush condition.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
185/55R14	80	H	6J	450	250	560	194	8.5
185/55R15	82	H	6J	475	250	585	194	8.5
195/45R16 XL	84	H	6 1/2J	500	290	582	195	8.8
195/50R15	82	H	6J	475	250	577	201	8.5
195/50R16 XL	88	V	6J	560	290	602	201	8.8
195/55R15	85	H	6J	515	250	595	201	8.8
195/55R16	87	H	6J	545	250	620	201	8.8
205/45R16 XL	87	V	7J	545	290	590	206	8.8
205/45R17 XL	88	V	7J	560	290	616	206	8.8
205/50R16 XL	91	V	6 1/2J	615	290	612	214	8.8
205/50R17 XL	93	V	6 1/2J	650	290	638	214	8.8
205/55R16	91	H	6 1/2J	615	250	632	214	8.8
205/55R16 XL	94	H	6 1/2J	670	290	632	214	8.8
205/55R17 XL	95	V	6 1/2J	690	290	658	214	8.8
215/45R17 XL	91	V	7J	615	290	626	213	8.8
215/50R17 XL	95	V	7J	690	290	648	226	8.8
215/55R16 XL	97	H	7J	730	290	642	226	8.8
215/55R17 XL	98	V	7J	750	290	668	226	8.8
225/40R18	92	V	8J	630	290	637	230	8.8
225/45R17 XL	94	V	7 1/2J	670	290	634	225	8.8
225/45R18 XL	95	V	7 1/2J	690	290	659	225	8.8
225/50R17 XL	98	V	7J	750	290	658	233	8.8
225/55R16 XL	99	H	7J	775	290	654	233	8.8
225/55R17 XL	101	V	7J	825	290	658	233	8.8
235/40R18 XL	95	V	8 1/2J	690	290	645	241	8.8
235/45R17 XL	97	V	8J	730	290	644	236	8.8
235/45R18 XL	98	V	8J	750	290	669	236	8.8
235/55R17 XL	103	V	7 1/2J	875	290	690	245	8.8
245/40R18 XL	97	V	8 1/2J	730	290	653	248	8.8
245/45R17 XL	99	V	8J	775	290	652	243	8.8
245/45R18 XL	100	V	8J	800	290	677	243	8.8



Polarbear SUV

High snow performance

1. High snow evacuation performance;
2. Better handling and traction on ice& snow road surface.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
215/60R17	96	V	6 1/2J	710	250	690	221	8.8
215/65R16	98	H	6 1/2J	750	250	686	221	8.8
215/70R16	100	H	6 1/2J	800	250	708	221	8.8
225/60R17	99	H	6 1/2J	775	250	702	228	8.8
225/65R17 XL	106	V	6 1/2J	950	290	724	228	8.8
235/65R17	108	V	7J	1000	290	738	240	8.8
235/60R18 XL	107	V	7J	975	290	739	240	8.8
235/55R19 XL	105	V	7 1/2J	925	290	741	245	8.8
255/55R18 XL	109	V	8J	1030	290	737	265	8.8
275/40R20 XL	106	V	9 1/2J	950	290	728	278	8.8



Polarbear Van

High snow and handling performance

1. Superior grip and handling performance;
2. Excellent stability performance;
3. Good snow evacuation ability;
4. Improved handling on ice& snow condition to provide high safety.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
165/70R14C	6PR	89/87	R	5J	D545 S580	375	588	170	9.2
175/65R14C	6PR	90/88	T	5J	D560 S600	375	584	177	9.2
195/60R16C	6PR	99/97	T	6J	D730 S775	375	640	201	9.7
195/65R16C	8PR	104/102	T	6J	D850 S900	475	660	201	9.9
195/70R15C	8PR	104/102	R	6J	D850 S900	450	655	201	10.2
195/75R16C	8PR	107/105	R	5 1/2J	D925 S975	475	698	196	10.2
205/65R16C	8PR	107/105	R	6J	D925 S975	475	672	209	9.9
205/70R15C	8PR	106/104	R	6J	D900 S950	450	669	209	10.2
205/75R16C	8PR	110/108	R	5 1/2J	D1000 S1060	475	714	203	10.2
215/60R16C	6PR	103/101	T	6 1/2J	D825 S875	375	664	221	9.7
215/65R16C	8PR	109/107	R	6 1/2J	D975 S1030	475	686	221	9.9
215/70R15C	8PR	109/107	R	6 1/2J	D975 S1030	450	683	221	10.2
215/75R16C	8PR	113/111	R	6J	D1090 S1150	450	728	216	9.9
225/65R16C	8PR	112/110	R	6 1/2J	D1060 S1120	475	698	228	9.9
225/70R15C	8PR	112/110	R	6 1/2J	D1060 S1120	450	697	228	9.9
225/75R16C	10PR	121/120	R	6J	D1400 S1450	550	744	223	9.9
235/65R16C	8PR	115/113	R	7J	D1150 S1215	475	712	240	9.9