



TBR
—

Long Haul



IFE891 New

Radial Truck Tire (Long Haul)

1. Maximize tread volume for long original life and lower tread wear cost per mile.
2. Equalizer ribs Absorb irregular wear , promoting uniform rib wear and higher removal mileage.
3. Micro sipes Protect against irregular wear.
4. Optimized groove angle & stone rejection design.
5. Help resist stone retention.
6. Advanced technology compounds.
7. Helps reduce rolling resistance and improve optimum fuel efficiency.
8. Optimizes the footprint for even wear and long tread life.
9. Strong carcass materials.
10. Help promote tire durability and provide tire retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1014	298	16.5	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1014	298	16.5	TRA



IDE892 New

Radial Truck Tire (Long Haul)

1. Suitable for the drive axle of the trucks running on highway.
2. Good braking and grip on wet road.
3. Long life, Low rolling resistance.
4. Optimizes the footprint for even wear and long tread life.
5. Strong carcass materials.
6. Help promote tire durability and provide tire retreadability.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1026	298	22.0	TRA



ITL869 New

Radial Truck Tire (Long Haul)

- 1.Suitable for trailer axle of the trucks running on highway.
- 2.Reduced CO2 emission.
- 3.Reduced fuel consumption.
- 4.Retreadable and Regroovable.
- 5.Lasting grip and stability on wet road surfaces.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
445/45R19.5	20	160	J	15.00	---	---	4500	900	895	446	12.5	ETRTO



IDE803

Radial Truck Tire (Long Haul)

- 1.Suitable for trucks running with high speed on highway.
- 2.Low fuel consumption.
- 3.Good braking and grip on wet road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	20.0	GB
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	18.5	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	18.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.5	ETRTO



IFE805

Radial Truck Tire For Highway (Long Haul)

- 1.S-shaped groove bottom reduces stone retention.
- 2.Good handling and high-speed performance.
- 3.Low rolling resistance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	15.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	15.0	GB
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	15.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	15.0	ETRTO



IDL817

Radial Truck Tire (Long Haul)

1. Typical block pattern design makes good towing and grip on wet and dry road.
2. Low rolling resistance.
3. Wear-resistance compound, reducing shifting to prevent uneven wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
445/50R22.5	18	158	L	14.00	---	---	4250	760	1018	445	20.0	TRA
445/50R22.5	20	161	L	14.00	---	---	4625	830	1018	445	20.0	TRA
445/50R22.5	18	155	L	14.00	---	---	3875	700	1018	445	20.0	ETRTO
445/50R22.5	20	161	L	14.00	---	---	4625	850	1018	445	20.0	ETRTO



ITE821

Radial Truck Tire For Highway (Long Haul)

- 1.Excellent straight running performance.
- 2.Sipes in shoulder offer low noise and strong heat dissipation.
- 3.Low rolling resistance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	9.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	9.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	9.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	9.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	9.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	9.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.0	TRA



F860+

Radial Truck And Bus Tire (Long Haul)

- 1.Special design for all position of buses and steer and trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	16.0	GB



ITL811

Radial Truck Tire(Long Haul)

- 1.Suitable for the trailer axle of trucks running on highway.
- 2.Low rolling resistance.
- 3.Wear-resistance compound, reducing shifting to prevent uneven wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
445/50R22.5	18	158	L	14.00	---	---	4250	760	1018	445	10.5	TRA
445/50R22.5	20	161	L	14.00	---	---	4625	830	1018	445	10.5	TRA
445/50R22.5	18	155	L	14.00	---	---	3875	700	1018	445	10.5	ETRTO
445/50R22.5	20	161	L	14.00	---	---	4625	850	1018	445	10.5	ETRTO



LLF16

Radial Truck And Bus Tire (Long Haul)

Suitable for all position of the buses and the steer and trailer axle of the trucks running on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA



LLF26

Radial Truck And Bus Tire(Long Haul)

Suitable for all position of buses and medium trucks running on the high-grade road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	12	133/131	L	6.50	1950	720	2060	720	974	236	12.5	GB
8.25R20	14	136/134	L	6.50	2120	830	2240	830	974	236	12.5	GB
8.25R20	16	139/137	L	6.50	2300	930	2430	930	974	236	12.5	GB
8R19.5	12	124/122	M	6.00	1500	760	1600	760	859	203	12.5	TRA
8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	12.5	ETRTO
9.5R17.5	14	129/127	M	6.75	1750	750	1850	750	842	240	12.0	ETRTO
9.5R17.5	18	143/141	M	6.75	2575	875	2725	875	842	240	12.0	ETRTO



LLD01

Radial Truck Tire (Long Haul)

1.Suitable for trucks running with high speed on highway.
2.Good grip and high-speed performance.
3.Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.00	3075	830	3350	830	1085	293	20.0	GB
11.00R20	18	152/149	K	8.00	3250	930	3550	930	1085	293	20.0	GB
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1059	279	20.0	ETRTO
12.00R20	18	154/151	L	8.50	3450	830	3750	830	1125	315	20.0	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	19.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	19.5	ETRTO



LLD37

Radial Truck Tire (Long Haul)

1.Suitable for the drive axle of the trucks running on highway.
2.Good braking and grip on wet road.
3.Long life.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1065	279	22.0	ETRTO
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	16.0	ETRTO
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA



INF-901

Radial Truck Tire (Long Haul)

1.Suitable for the drive axle of the trucks running on highway.
2.Good braking and grip on wet road.
3.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/145	J	7.5	2860	860	3260	930	1065	278	20.0	



T820

Radial Truck Tire (Long Haul)

Suitable for trailer axle of the trucks running on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
305/70R19.5	18	148/145	M	9.00	2900	850	3150	850	923	305	12.0	ETRTO
385/55R19.5	18	156	J	12.25	---	---	4000	900	919	386	12.5	ETRTO
435/50R19.5	18	156	J	14.00	---	---	4000	850	931	438	12.5	ETRTO
435/50R19.5	20	160	J	14.00	---	---	4500	900	931	438	12.5	ETRTO
445/45R19.5	18	156	J	15.00	---	---	4000	900	895	446	15.5	ETRTO
445/45R19.5	20	160	J	15.00	---	---	4500	900	895	446	15.5	ETRTO



T830

Radial Truck Tire (Long Haul)

- 1. Suitable for the trailer axle of trucks running on highway.
- 2. Low rolling resistance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	15.5	ETRTO
385/55R22.5	20	160	J	12.25	---	---	4500	900	996	386	15.5	ETRTO



C600

Radial Truck And Bustire (Long Haul)

- 1. High-speed performance.
- 2. Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	16	GB



Regional



IDL831

Radial Truck Tire(Regional)

- 1. Typical block pattern design make good towing and grip on wet and dry road.
- 2. Strong wear resistance and long life.
- 3. Retreadability.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	21.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	21.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	21.0	GB
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1065	279	22.0	ETRTO
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.5	TRA
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	21.5	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	23.0	ETRTO
12R22.5	16	150/147	L	9.00	3075	830	3350	830	1085	300	23.0	GB
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	19.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	19.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	19.0	ETRTO
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
295/80R22.5	16	150/147	L	9.00	3075	830	3350	830	1044	298	23.0	GB
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	23.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	23.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	23.0	ETRTO
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	23.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO



IDL813

Radial Truck Tire(Regional)

- 1.Suitable for drive axle of trucks riding on highway.
- 2.Long life.
- 3.Good grip performance.
- 4.Low eccentric wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1059	279	20.0	ETRTO
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.0	TRA
12R22.5	16	150/147	L	9.00	3075	830	3350	830	1085	300	21.0	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	21.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	21.0	GB
13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
13R22.5	18	154/151	L	9.75	3450	830	3750	830	1124	320	21.0	GB
315/80R22.5	18	154/151	L	9.00	3450	830	3750	830	1076	312	21.0	TRA
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



ITL812

Radial Truck Tire(Regional)

- 1.Suitable for drive and steer axle of trucks riding on highway.
- 2.Long life
- 3.Retreadability.
- 4.Low eccentric wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15.0	TRA
10R22.5	14	141/139	L	7.50	2430	790	2575	790	1019	254	17.0	TRA
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	16.0	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	17.0	GB
12R22.5	16	152/148	M	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	16.0	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	16.0	GB
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	16.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	17.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	17.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	17.0	ETRTO
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	M	9.00	3350	850	4000	850	1076	312	17.0	ETRTO



ITL863

Radial Truck Tire(Regional)

1. Typical combined pattern design offers optimal trailer performance.
2. Low rolling resistance.
3. Wear-resistance compound, reducing shifting to prevent uneven wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R22.5	18	158	K	12.25	---	---	4250	850	996	386	16.5	ETRTO
385/55R22.5	20	160(158)	J(L)	12.25	---	---	4500	900	996	386	16.5	ETRTO
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160(158)	J(L)	11.75	---	---	4500	900	1072	389	16.5	ETRTO
425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	13.00	---	---	5150	825	1124	430	17.5	ETRTO
445/65R22.5	20	168	J/K	13.00	---	---	5600	830	1150	444	17.5	TRA
445/65R22.5	20	169	J/K	14.00	---	---	5800	900	1150	454	18.0	ETRTO



IFE838

Radial Truck Tire(Regional)

1. Suitable for steer and trailer axle of trucks riding on highway.
2. Excellent wet grip performance.
3. Retreadability.
4. Low fuel consumption.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	15	ETRTO



IAL836

Radial Truck Tire(Regional)

1. Good handling and driving.
2. Long life.
3. Retreadability.
4. Low eccentric wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	TRA
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	18.5	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	18.5	GB
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	18.0	ETRTO
12R22.5	16	150/147	L	9.00	3075	830	3350	830	1085	300	18.0	TRA
13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	18.0	ETRTO
13R22.5	18	154/151	L	9.75	3450	830	3750	830	1124	320	18.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	16.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	16.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	18.0	ETRTO
315/80R22.5	18	154/151	L	9.00	3450	830	3750	830	1076	312	18.0	GB
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.0	ETRTO



IFL827

Radial Truck Tire(Regional)

- 1.Suitable for drive and steer axle of trucks riding on highway.
- 2.Retreadability.
- 3.Low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1079	289	14.0	TRA
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1079	289	14.0	GB
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1079	296	13.0	GB
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1079	296	13.0	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1078	296	13.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1038	294	14.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1038	294	14.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1038	294	14.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1070	308	13.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1070	308	13.0	ETRTO
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1070	308	13.0	TRA
385/65R22.5	18	158	K	11.75	---	---	4250	850	1066	385	13.0	ETRTO
385/65R22.5	20	160	J	11.75	---	---	4500	900	1066	385	13.0	ETRTO



IDL829

Radial Truck Tire(Regional)

1. Typical block pattern design makes good towing and grip on wet and dry road.
2. Good drainage.
3. Good wet traction.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1048	274	16.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1048	274	16.0	GB
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1079	289	17.0	TRA
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1079	289	17.0	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1119	311	15.5	TRA
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1119	311	15.5	GB
12R22.5	16	150/147	L	9.00	3075	830	3350	830	1079	296	15.0	GB
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1079	296	15.0	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1078	296	15.0	ETRTO
13R22.5	16	154/150	L	9.75	3350	850	3750	850	1118	316	15.0	ETRTO
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1118	316	15.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1038	294	15.5	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1038	294	15.5	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1038	294	15.5	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1070	308	16.0	ETRTO
315/80R22.5	18	154/151	L	9.00	3450	830	3750	830	1070	308	16.0	GB
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1070	308	16.0	ETRTO






IAL828

Radial Truck Tire(Regional)

- 1. Good handling and driving.
- 2. Retreadability.
- 3. Low eccentric wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	150/147	L	9.00	3075	830	3350	830	1079	296	14.0	TRA
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1079	296	14.0	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1078	296	14.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1038	294	15.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1038	294	15.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1038	294	15.0	GB



F816

Radial Truck Tire(Regional)

- 1. Good handling.
- 2. Low rolling resistance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	14.5	ETRTO
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA



LLF06

Radial Truck Tire(Regional)

- 1. Good handling and driving.
- 2. Retreadability.
- 3. Low eccentric wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	14.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	TRA
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO



LLF02

Radial Truck Tire(Regional)

- 1. Special for trucks of different tonnages which run on highway.
- 2. Stable and safe when run on wet and slippery road.
- 3. Low fuel consumption.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	TRA
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	14.5	ETRTO
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	16.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.5	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	14.5	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.5	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO



F860

Radial Truck Tire(Regional)

- 1.Special design for all position of buses and steer and trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R22	16	152/149	K	8.0	3250	830	3550	830	1135	293	14.5	TRA
11.00R22	18	154/151	K	8.0	3450	930	3750	930	1135	293	14.5	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	16.0	GB
305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	14.5	ETRTO
305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	14.5	ETRTO



LLF01

Radial Truck Tire (Regional)

- 1.Special for trucks of different tonnages which run on highway.
- 2.Stable and safe when running on wet and slippery road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	14.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.5	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	14.5	GB
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	14.5	ETRTO



LLF56+

Radial Truck And Bus Tire(Regional)

Suitable for all position of light and medium trucks running on highway.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	12	133/131	M	6.75	1950	720	2060	720	974	229	13.5	TRA
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	13.5	TRA
10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	14.0	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1020	254	14.0	ETRTO



LLF76

Radial Truck And Bus Tire(Regional)

Suitable for all position of buses and medium trucks running on the high-grade road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8R22.5	12	128/126	M	6.00	1700	760	1800	760	935	203	13.0	GB
8R22.5	14	130/128	M	6.00	1800	830	1900	830	935	203	13.0	GB



F865

Radial Truck Tire(Regional)

- 1.Special design for all position of buses and steer and trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	16.0	GB



D905

Radial Truck Tire(Regional)

1. Typical block pattern design suitable for drive axle of trucks running on highway.
2. Good braking and grip on wet road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12.00R20	18	154/151	L	8.50	3450	830	3750	830	1125	315	20.0	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.0	ETRTO
215/75R17.5	12	124/123	M	6.00	1550	675	1600	675	767	212	15.0	ETRTO
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	212	15.0	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	212	15.0	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	15.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	15.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	15.5	ETRTO
245/70R17.5	18	143/141	L	7.50	2575	875	2725	875	789	248	18.0	ETRTO
245/70R19.5	14	133/131	L	7.50	1950	760	2060	760	839	248	16.5	TRA
245/70R19.5	14	141/140	L	7.50	2500	850	2575	850	839	248	16.5	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	17.5	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	17.5	GB
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	16.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.5	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	17.5	GB



INF-900GOLD

Radial Truck Tire(Regional)

1. Drive axle for highway.
2. Deep and rigid block design for good traction.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.50	3000	930	3250	930	1054	278	20	GB



D930

Radial Truck Tire(Regional)

1. Drive axle for highway.
2. Deep and rigid block design for good traction.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R22	16	152/149	K	8.00	3250	830	3550	830	1135	293	19.5	TRA
305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	19.5	ETRTO
305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	19.5	ETRTO



D928

Radial Truck Tire(Regional)

1. Typical block pattern design suitable for drive axle of trucks running on highway.
2. Good braking and grip on the road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.5	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1059	279	20.5	ETRTO
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1056	283	20.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1056	283	20.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1020	298	20.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1020	298	20.5	TRA



D915

Radial Truck Tire(Regional)

1. Typical block pattern design suitable for drive axle of truck running on highway.
2. Good handling and driving.
3. Long life.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	17.5	ETRTO
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	19.5	ETRTO



D925

Radial Truck Tire(Regional)

1. Typical block pattern design suitable for drive axle of trucks running on highway.
2. Good braking and grip on wet road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	20.0	TRA
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	19.5	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	19.5	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	20.0	ETRTO



LLD27

Radial Truck Tire(Regional)

1. Suitable for the drive axle of the trucks running on highway.
2. Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1054	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.5	ETRTO



F820

Radial Truck Tire(Regional)

Suitable for all position of buses and the steer and trailer axle of trucks running on the highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	13.0	ETRTO
205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	205	12.5	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	12.5	TRA
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	12.5	TRA
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	13.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	13.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	13.0	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	13.0	ETRTO
245/70R19.5	16	136/134	L	7.50	2120	825	2240	825	839	248	13.0	ETRTO
255/70R22.5	14	136/133	M	7.50	2060	700	2240	700	930	255	14.0	ETRTO
255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	14.0	TRA
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	13.5	ETRTO
265/70R19.5	16	140/138	L	7.50	2360	775	2500	775	867	262	13.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	14.5	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	14.5	GB
285/70R19.5	16	144/142	M	8.25	2650	800	2800	800	895	283	14.0	
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	14.0	ETRTO
285/70R19.5	18	150/147	J	8.25	3075	900	3350	900	895	283	14.0	



T810

Radial Truck Tire(Regional)

Suitable for all position of the buses and trailer axle of the trucks running on highway.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1050	279	10.75	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1050	279	10.75	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75	TRA



INF-A902

Radial Truck Tire(Regional)

1.Suitable for trucks of different tonnages which run on highway.
2.Low fuel consumption.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
265/70R19.5	18	143/141	J	12.75	2575	850	2725	850	1072	389	13.5	ETRTO
385/65R22.5	18	158	L	11.75	---	---	4250	850	1072	389	15.5	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	---	---	4500	900	1072	389	15.5	ETRTO



LLA18

Radial Truck Tire(Regional)

1.Suitable for trucks of different tonnages which run on highway.
2.Low fuel consumption.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160	J	11.75	---	---	4500	900	1072	389	16.5	ETRTO



IAL800

Radial Truck Tire(Regional)

1.Good handling and driving.
2.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	12	133/131	L	6.50	1950	720	2060	720	974	236	12.0	GB
8.25R20	14	136/134	L	6.50	2120	830	2240	830	974	236	12.0	GB
8.25R20	16	139/137	L	6.50	2300	930	2430	930	974	236	12.0	GB
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R24	18	156/153		8.5	3650	775	4000	775	1226	313		ETRTO
12.00R24	20	160/156		8.5	4000	850	4500	850	1226	313		ETRTO
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1054	279	16.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	16.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	16.0	ETRTO
315/80R22.5	20	156/150	M	9.00	3350	850	4000	850	1076	312	16.0	ETRTO

Coach&Bus



IAU609

Radial Bus Tire(Urban)

- 1.Enhanced sidewall ensures high safety.
- 2.Tire strength is increased by 35%,with application of ST steel cord.
- 3.Tire bead cracking is prevented,with application fiber layer in bead area.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	21	ETRTO
275/70R22.5	16	144/141	J	8.25	2575	830	2800	830	958	276	21	GB



IAU608

Radial Bus Tire(Coach)

- 1.Enhanced sidewall ensures high safety.
- 2.Tire strength is increased by 35%,with application of ST steel cord.
- 3.Good wet traction.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	14.5	TRA
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	17.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB



U801

Radial Bus Tire(Urban)

- 1.High safety and long life.
- 2.Good wet traction.
- 3.Typical used for urban bus.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	J	8.25	2650	720	2800	720	1059	279	20.0	TRA
11R22.5	16	146/143	J	8.25	2725	830	3000	830	1059	279	20.0	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1059	279	20.0	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	19.5	ETRTO
275/70R22.5	16	144/141	J	8.25	2575	830	2800	830	958	276	19.5	GB
295/80R22.5	16	152/148 (154/150)	J(E)	9.00	3150	900	3550	900	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	J	9.00	3075	830	3350	830	1044	298	20.0	GB
295/80R22.5	18	152/149	J	9.00	3250	900	3550	900	1044	298	20.0	GB
305/70R22.5	16	152/148 (154/150)	J(E)	9.00	3150	900	3550	900	1000	305	20.0	ETRTO




IAU802

Radial Bus Tire(Urban)

- 1.Enhanced sidewall ensures high safety.
- 2.Long service life.
- 3.Typical used for urban bus.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	F	8.25	2650	720	2800	720	1059	279	20.0	TRA
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1059	279	20.0	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1059	279	20.0	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	19.5	ETRTO
275/70R22.5	16	144/141	J	8.25	2575	830	2800	830	958	276	19.5	GB
295/80R22.5	16	152/148 (154/150)	J(E)	9.00	3150	900	3550	900	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	J	9.00	3075	830	3350	830	1044	298	20.0	GB
295/80R22.5	18	152/149	J	9.00	3250	900	3550	900	1044	298	20.0	GB
305/70R22.5	16	152/148 (154/150)	J(E)	9.00	3150	900	3550	900	1000	305	20.0	ETRTO

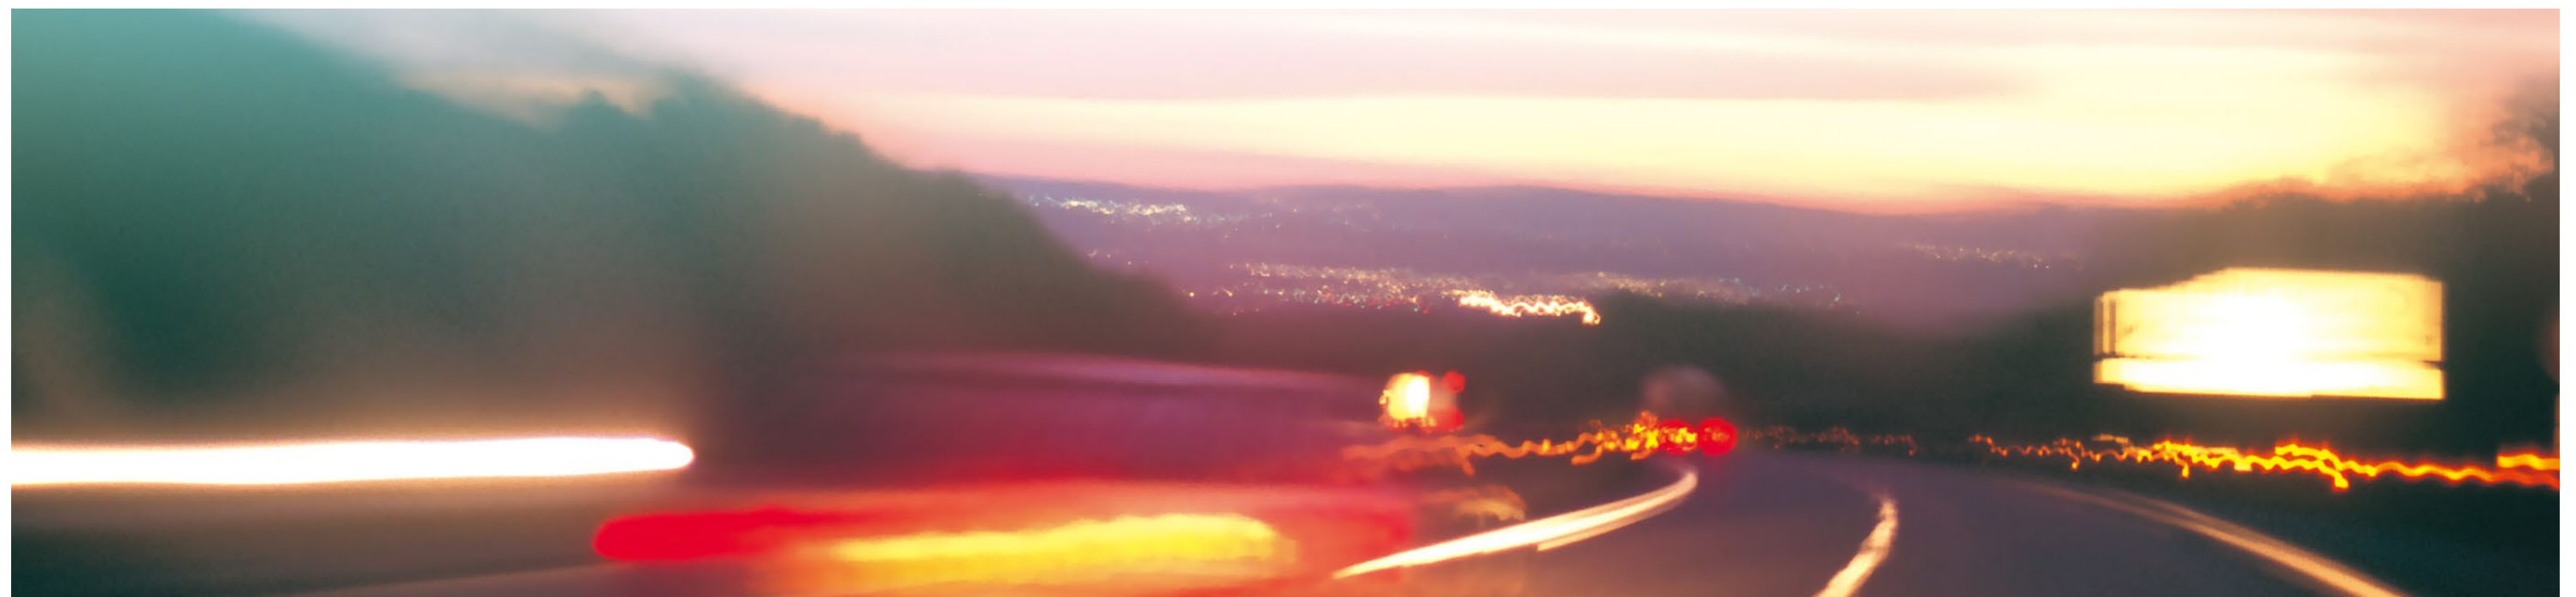



IAU603

Radial Bus Tire(Coach)

- 1.Suitable for all axle of bus riding on highway.
- 2.Long life.
- 3.Good grip performance.
- 4.low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15.0	TRA
10R22.5	14	141/139	L	7.50	2430	790	2575	790	1019	254	17.0	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	16.0	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	17.0	GB
12R22.5	16	152/148	M	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	16.0	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	16.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	17.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB



IAU605

Radial Bus Tire(Coach)

- 1.Extra wide tread design for high mileage and even wear.
- 2.Zig-zag grooves for excellent handling.
- 3.Optimize structure design,



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R14LT	8	95/90	L	4	600	450	690	450	672	168	10.0	GB
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	12.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	13.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	14.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	15.0	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
8R22.5	14	130/128	M	6.00	1800	830	1900	830	935	203	14.0	GB
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	212	14.5	ETRTO
215/75R17.5	14	125/122	M	6.00	1500	760	1650	760	767	211	14.5	GB
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	14.5	GB
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
235/75R17.5	14	129/126	M	6.75	1700	760	1850	760	797	233	14.5	GB
235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	14.5	GB
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO

On&Off Road



IDR988

Radial Truck Tire (On&Off Road)

- 1. Larger outline and wider tread increases mileage and service life.
- 2. STRONG-MAX structure design, can load more.
- 3. Suitable for driver axle of dump.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	19.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB



IDR978

Radial Truck Tire (On&Off Road)

- 1. Good traction.
- 2. Chip, cut and abrasion resistance tread compound.
- 3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB



IDR939

Radial Truck Tire (On&Off Road)

1. Transverse pattern block design reduces shoulder heat.
2. Wide running surface and higher saturation design improve the wear mileage.
3. Powerful traction, grip and climbing ability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	20.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	20.5	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	20.5	GB



IAR919

Radial Truck Tire (On&Off Road)

1. pattern block design reduce shoulder heat.
2. Wide running surface and higher saturation design improve the wear mileage.
3. Powerful traction, grip and climbing performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	15.0	GB
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	18.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	18.0	GB
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	18.0	GB



IAR959

Radial Truck Tire (On&Off Road)

1. Wide and deep tread grooves for long tire life.
2. Excellent cutting and chipping resistance.
3. Robust tread and high traction on rough surfaces.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	16	139/137	F	6.50	2300	930	2430	930	974	236	18.0	GB
9.00R20	16	144/142	D	7.00	2650	900	2800	900	1019	259	20.0	GB



LLD09

Radial Truck Tire (On&Off Road)

1. Suitable for on/off road conditions.
2. It is also suitable for trucks running with high speed on highway for short distance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	14.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	14.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	14.5	GB
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.5	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	16.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB



D965

Radial Truck Tire (On&Off Road)

1. Drive axle for on/off road conditions.
2. Deep and rigid block design for good traction.
3. Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	17.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	17.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	17.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	17.5	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.5	GB



LLA38

Radial Truck Tire (On&Off Road)

1. Suitable for the drive and trailer axle of the heavy-duty trucks.
2. Strong wear resistance.
3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	16.5	ETRTO
385/55R22.5	20	160	J	12.25	---	---	4500	900	996	386	16.5	ETRTO
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160	J	11.75	---	---	4500	900	1072	389	16.5	ETRTO
425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	13.00	---	---	5150	825	1124	430	17.5	ETRTO
445/65R22.5	20	168	J/K	13.00	---	---	5600	830	1150	444	18.0	TRA
445/65R22.5	20	169	J	14.00	---	---	5800	900	1150	454	18.0	ETRTO



D960

Radial Truck Tire (On&Off Road)

1. Drive axle for on/off road conditions.
2. Deep and rigid block design for long life and good traction.
3. Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.5R17.5	14	129/127	K	6.75	1750	750	1850	750	842	240	16.0	ETRTO
9.5R17.5	18	143/141	K	6.75	2575	875	2725	875	842	240	16.0	ETRTO
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	21.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	21.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.0	TRA
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	21.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	21.0	ETRTO
12R22.5	16	150/147	K	9.00	3075	830	3350	830	1085	300	21.0	GB
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	21.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	21.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
265/70R19.5	16	140/138	K	7.50	2360	775	2500	775	867	262	15.5	ETRTO
265/70R19.5	18	143/141	K	7.50	2575	850	2725	850	867	262	15.5	ETRTO
275/70R22.5	16	148/145	K	8.25	2900	900	3150	900	958	276	21.0	ETRTO
275/70R22.5	16	144/141	K	8.25	2575	830	2800	830	958	276	21.0	GB
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	22.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	22.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1082	312	21.0	ETRTO



LLA08

Radial Truck Tire (On&Off Road)

1. Typical combined pattern.
2. Suitable for trucks of different tonnages which run on highway and normal road.
3. Strong wear resistance, low heat generation.
4. Good handling.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R20	12	128/126	L	6.00	1700	760	1800	760	935	215	13.5	GB
7.50R20	14	130/128	K	6.00	1800	830	1900	830	935	215	13.5	GB
8.25R20	12	133/131	L	6.50	1950	720	2060	720	974	236	15.5	GB
8.25R20	14	136/134	L	6.50	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	L	6.50	2300	930	2430	930	974	236	15.5	GB
9.00R20	14	141/139	K	7.00	2430	790	2575	790	1019	259	15.0	TRA
9.00R20	16	144/142	K	7.00	2650	900	2800	900	1019	259	15.0	GB
10.00R20	16	146/143	K	7.50	2725	830	3000	830	1054	278	15.5	TRA
10.00R20	18	149/146	K	7.50	3000	930	3250	930	1054	278	15.5	GB
11.00R20	16	150/147	K	8.00	3075	830	3350	830	1085	293	16.5	GB
11.00R20	18	152/149	K	8.00	3250	930	3550	930	1085	293	16.5	GB
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1054	279	15.5	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	15.5	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1050	279	15.5	ETRTO
11R24.5	14	146/143	K	8.25	2725	720	3000	720	1104	279	15.5	TRA
11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	15.5	TRA
12.00R20	18	154/151	K	8.50	3450	830	3750	830	1125	315	17.0	TRA
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12.00R24	18	156/153	K	8.50	3650	775	4000	775	1226	313	17.0	ETRTO
12.00R24	20	160/156	K	8.50	4000	850	4500	850	1226	313	17.0	ETRTO
12R24.5	16	152/149	K	9.00	3250	830	2550	830	1135	300	16.0	TRA
12R24.5	18	154/151	K	9.00	3450	930	3750	930	1135	300	16.0	GB
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	16.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO



ITR968

Radial Truck Tire (On&Off Road)

Typical combined pattern design suitable for all position of trucks on normal grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
275/70R22.5	16	148/145	K	8.25	2900	900	3150	900	958	276	17	ETRTO



INF-A703

Radial Truck Tire (On&Off Road)

1. Typical combined pattern.
2. Suitable for trucks of different tonnages which run on normal road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16	TRA
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	16	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	16	ETRTO



LLA01

Radial Truck Tire (On&Off Road)

1. Typical combined pattern.
2. Suitable for trucks of different tonnages which run on highway and normal road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.5	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	17.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.5	GB
13R22.5	18	156/150	K	9.8	3350	875	4000	875	1124	320	17.5	ETRTO



Off Road



IDO998

Radial Truck Tire(Off Road)

- 1. Good traction resistance.
- 2. Chip, cut and abrasion resistance tread compound.
- 3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	18	152/149	8.0	F	3250	930	3550	930	1096	293	24.5	GB
12.00R20	18	154/151	8.5	F	3450	830	3750	830	1136	315	24.5	GB
12.00R20	20	156/153	8.5	F	3650	900	4000	900	1136	315	24.5	GB



IDO986

Radial Truck Tire(Off Road)

- 1. Good traction resistance.
- 2. Chip, cut and abrasion resistance tread compound.
- 3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	F	8.25	2650	720	2800	720	1054	279	24.0	TRA
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1054	279	24.0	TRA
11R22.5	16	148/145	F	8.25	2900	850	3150	850	1050	279	24.0	ETRTO
11R24.5	14	146/143	F	8.25	2725	720	3000	720	1104	279	24.0	TRA
11R24.5	16	149/146	F	8.25	3000	830	3250	830	1104	279	24.0	TRA
12.00R20	18	154/151	F	8.50	3450	830	3750	830	1125	315	24.5	GB
12.00R20	20	156/153	F	8.50	3650	900	4000	900	1125	315	24.5	GB
12R22.5	16	150/147	F	9.00	3075	830	3350	830	1085	300	24.0	GB
12R22.5	16	152/148	F	9.00	3150	850	3550	850	1084	300	24.0	ETRTO
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	24.0	ETRTO
13R22.5	18	154/151	F	9.75	3450	830	3750	830	1124	320	24.0	GB
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	24.5	ETRTO
295/80R22.5	16	150/147	F	9.00	3075	830	3350	830	1044	298	24.5	GB
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1044	298	24.5	GB
315/80R22.5	18	154/150	F	9.00	3350	825	3750	825	1076	312	24.0	ETRTO
315/80R22.5	20	156/150	F	9.00	3350	850	4000	850	1076	312	24.0	ETRTO



IDO983

Radial Truck Tire(Off Road)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1019	259	23.5	GB
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1054	278	23.5	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1085	293	23.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1125	315	23.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1125	315	23.5	GB
12.00R24	18	156/153	F	8.5	3650	775	4000	775	1226	313	24.0	ETRTO
12.00R24	20	160/156	F	8.5	4000	850	4500	850	1226	313	24.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	22.0	ETRTO
295/80R22.5	16	150/147	F	9.00	3075	830	3350	830	1044	298	22.0	GB
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1044	298	22.0	GB



LLD10

Radial Truck Tire(Off Road)

- 1.Suitable for off road conditions.
- 2.Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	F	7.0	2430	790	2575	790	1019	259	20.0	TRA
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1019	259	20.0	GB
10.00R20	16	146/143	J	7.5	2725	830	3000	830	1054	278	20.0	TRA
10.00R20	18	149/146	J	7.5	3000	930	3250	930	1054	278	20.0	GB
11.00R20	16	150/147	F	8.0	3075	830	3350	830	1085	293	20.0	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1085	293	20.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.0	TRA
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	20.0	ETRTO
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	20.0	GB



IDO993

Radial Truck Tire(Off Road)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R16LT	16	128/124	F	6.50H	1600	770	1800	770	855	235	18.0	GB
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1019	259	24.5	GB
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1054	278	24.5	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1085	293	24.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1125	315	24.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1125	315	24.5	GB



D969

Radial Truck Tire(Off Road)

- Suitable for hilly area and mine etc.,off road conditions
- 1.Off-road pattern block ensures powerful traction and good self-cleaning ability.
 - 2.Optimized compound delivers good puncture resistance.
 - 3.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	15.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	15.5	GB
7.50R16LT	12	120/116	F	6.00G	1250	670	1400	670	805	215	17.5	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	805	215	17.5	GB
8.25R16LT	12	123/119	F	6.50H	1360	560	1550	560	855	235	17.5	GB
8.25R16LT	14	126/122	F	6.50H	1500	670	1700	670	855	235	17.5	GB
8.25R16LT	16	128/124	F	6.50H	1600	770	1800	770	855	235	17.5	GB
8.25R20	12	133/131	F	6.5	1950	720	2060	720	974	236	21.5	GB
8.25R20	14	136/134	F	6.5	2120	830	2240	830	974	236	21.5	GB
8.25R20	16	139/137	F	6.5	2300	930	2430	930	974	236	21.5	GB
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1019	259	23.5	GB
10.00R20	18	149/146	J	7.5	3000	930	3250	930	1054	278	25.5	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1085	293	25.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1125	315	25.5	TRA
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	F	9.00	3075	830	3350	830	1044	298	20.0	GB


Light Truck



IFL866

Radial Truck Tire(Regional)

- 1.Extra wide tread design for high mileage and even wear.
- 2.Zig-zag grooves for excellent handling.
- 3.Optimize structure design.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	L	4	600	450	690	450	680	170	10.0	GB
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	12.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	13.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	212	14.5	ETRTO
215/75R17.5	14	125/122	M	6.00	1500	760	1650	760	767	211	14.5	GB
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	14.5	GB
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
235/75R17.5	14	129/126	M	6.75	1700	760	1850	760	797	233	14.5	GB
235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	14.5	GB
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO



IDL831

Radial Truck Tire(Regional)

1. Typical block pattern design make good towing and grip on wet and dry road.
2. Strong wear resistance and long life.
3. Retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	16.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	212	16.0	ETRTO
215/75R17.5	14	125/122	M	6.00	1500	760	1650	760	767	211	16.0	GB
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	16.0	GB
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	17.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	17.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	17.0	ETRTO
235/75R17.5	14	129/126	M	6.75	1700	760	1850	760	797	233	17.0	GB
235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	17.0	GB
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	18.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	18.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	18.0	ETRTO



IAR919

Radial Truck Tire (On&Off Road)

1. pattern block design reduce shoulder heat.
2. Wide running surface and higher saturation design improve the wear mileage.
3. Powerful traction, grip and climbing performance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	K	4	600	450	690	450	680	170	10.0	GB
6.00R15LT	8	97/92	K	4.50E	630	460	730	460	705	170	10.5	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	783	200	14.0	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	15.0	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	865	235	16.0	GB



IAR959

Radial Truck Tire (On&Off Road)

1. Wide and deep tread grooves for long tire life.
2. Excellent cutting and chipping resistance.
3. Robust tread and high traction on rough surfaces.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	F	4	600	450	690	450	680	170	12.5	GB
6.00R15LT	8	97/92	F	4.50E	630	460	730	460	705	170	12.5	GB
6.50R16LT	12	110/105	F	5.50F	925	670	1060	670	760	185	13.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	783	200	17.0	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	18.0	GB
8.25R16LT	16	128/124	D	6.50H	1600	770	1800	770	865	235	18.0	GB
9.00R16LT	16	134/129	D	6.50H	1850	770	2120	770	900	255	18.0	GB



F815

Radial Truck Tire(Regional)

Suitable for and medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	L	4	600	450	690	450	680	170	10.0	GB
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	10.5	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	10.5	GB



F835

Radial Truck Tire(Regional)

Suitable for the steer and trailer axle of medium trucks running on the highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
LT225/75R16	12	119/116	N	6.00	1250	650	1360	650	744	223	11.1	TRA
LT235/85R16	14	126/123	L	6 1/2J	1550	750	1700	750	806	235	8.9	---
ST235/85R16	14	132/127	L	6 1/2J	1750	760	2000	760	806	235	8.9	TRA
LT245/75R16	12	123/120	N	7.00	1400	650	1550	650	774	248	11.1	TRA



F830

Radial Truck Tire(Regional)

Suitable for medium trucks running on the highway.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	10.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	10.5	GB



LLF26

Radial Truck Tire(Regional)

Suitable for medium trucks running on the high-grade road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.5	GB
8.25R15TR	12	126/124	M	6.50	1600	720	1700	720	847	236	12.5	TRA
8.25R15TR	14	129/127	L	6.50	1750	830	1850	830	847	236	12.5	TRA
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	12.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	12.5	GB



LLF86

Radial Truck And Bus Tire(Regional)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	212	12.0	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	212	12.0	ETRTO



D955

Radial Truck Tire(On&Off Road)

1. Drive axle for on/off road conditions.
2. Deep and rigid block design for good traction.
3. Cut resistance compound.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	12.5	GB
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	15.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	15.5	ETRTO
245/70R19.5	16	136/134	L	7.50	2120	825	2240	825	839	248	15.5	ETRTO



LLA78

Radial Truck Tire And (Regional)

1. Typical combined pattern.
2. Suitable for all position of medium trucks running on highway and normal road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
235/75R17.5	12	130/128	M	6.75	1800	725	1900	725	797	233	13	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	13	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	13	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12	ETRTO



LLD09

Radial Truck Tire (On&Off Road)

1. Suitable for on/off road conditions.
2. It is also suitable for trucks running with high speed on highway for short distance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	815	215	13.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	815	215	13.5	GB
8.25R16LT	12	123/119	L	6.50H	1360	560	1550	560	865	235	14.5	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	865	235	14.5	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	865	235	14.5	GB



IAL812

Radial Truck Tire(Regional)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
205/85R16LT	10	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



IAL867

Radial Truck Tire(Regional)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
205/85R16LT	10	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



LLA08

Radial Truck Tire(On&Off Road)

1. Typical combined pattern.
2. Suitable for trucks of different tonnages which run on highway and normal road.
3. Strong wear resistance, low heat generation.
4. Good handling.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	10.5	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	10.5	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	12.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.5	GB
7.50R20	12	128/126	L	6.00	1700	760	1800	760	935	215	13.5	GB
7.50R20	14	130/128	K	6.00	1800	830	1900	830	935	215	13.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	13.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	13.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	13.5	GB
9.00R16LT	14	130/126	L	6.50H	1700	670	1950	670	890	255	14.5	GB
9.00R16LT	16	134/129	L	6.50H	1850	770	2120	770	890	255	14.5	GB



IAM903

Radial Truck Tire(Desert)

1. Suitable for all position of trucks running on on/off road.
2. High traction.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R16LT	8	112/107	L	6.00G	975	460	1120	460	805	215	9.5	GB





Logging



D950

Radial Truck Tire(Short Haul)

- 1. Drive axle for on/off road conditions.
- 2. Deep and rigid block design for good traction.
- 3. Cut resistance compound.
- 4. Used for logging conditions where high traction required.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1065	279	23.0	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1065	279	23.0	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1065	279	23.0	ETRTO
11R24.5	14	146/143	F	8.25	2725	720	3000	720	1116	279	25.0	TRA
11R24.5	16	149/146	F	8.25	3000	830	3250	830	1116	279	25.0	TRA
295/75R22.5	16	146/143	F	9.00	2725	830	3000	830	1026	298	23.0	TRA
285/75R24.5	16	147/144	F	8.25	2800	830	3075	830	1062	283	23.0	TRA

Winter



IFW806

Radial Truck Tire On Ice And Snow

1. High safety and good handling.
2. Optimized rib contact combats uneven wear and improves wet handling and braking.
3. Low noise.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	11.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	11.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.0	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	15.0	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	15.0	GB
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	15.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	15.0	TRA
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	15.0	GB
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	15.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	15.0	TRA
315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	15.0	ETRTO
385/65R22.5	20	160(158)	J(L)	11.75	---	---	4500	900	1072	389	16.5	ETRTO



IDW807

Radial Truck Tire On Ice And Snow

- 1.High safety and good handling.
- 2.Optimized rib contact combats uneven wear and improves wet handling and braking.
- 3.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	20.0	GB
315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	20.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	20.0	ETRTO
11R22.5	16	146/143	M	8.25	2725	800	3000	800	1059	279	20.0	JATMA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1059	279	20.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1059	279	20.0	ETRTO




IDX701

New —

Radial Truck Tire On Ice And Snow

- 1.Innovated snowflake design,improves wet handling and braking.
- 2.Optimized rib contact combats uneven wear and improves wet handling and braking.
- 3.Four seasons use ,long life.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	20	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	20	ETRTO



IDW808

Radial Truck Tire On Ice And Snow

- 1.High safety and good handling.
- 2.Optimized rib contact combats uneven wear and improves wet handling and braking.
- 3.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	L	4	600	450	690	450	680	170	10.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.0	GB
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	13.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	212	13.0	ETRTO
215/75R17.5	14	125/122	M	6.00	1500	760	1650	760	767	211	13.0	GB
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	13.0	GB
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	GB
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	15.0	GB
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	14.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.0	ETRTO
235/75R17.5	14	129/126	L	6.75	1700	760	1850	760	797	233	14.0	GB
235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	14.0	GB
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	15.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	15.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	15.0	ETRTO

2016 TIRE CATALOGUE

—