


SHANDONG
LINGLONG TIRE
CO.,LTD.


2019 TIRE CATALOGUE

PCR TIRE
TBR TIRE
SPECIALTY TIRE



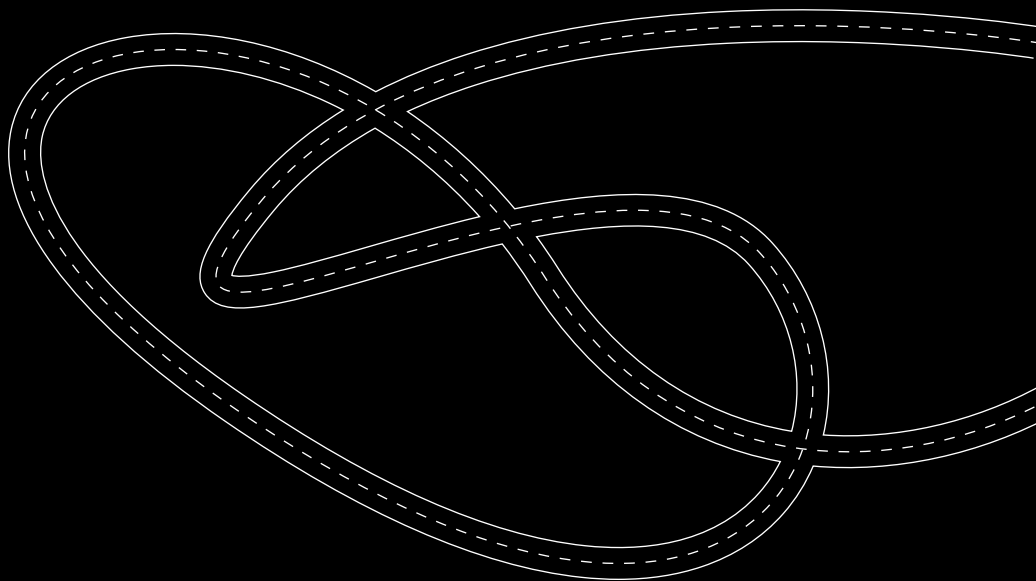

**THE WORLD AT
YOUR REACH**

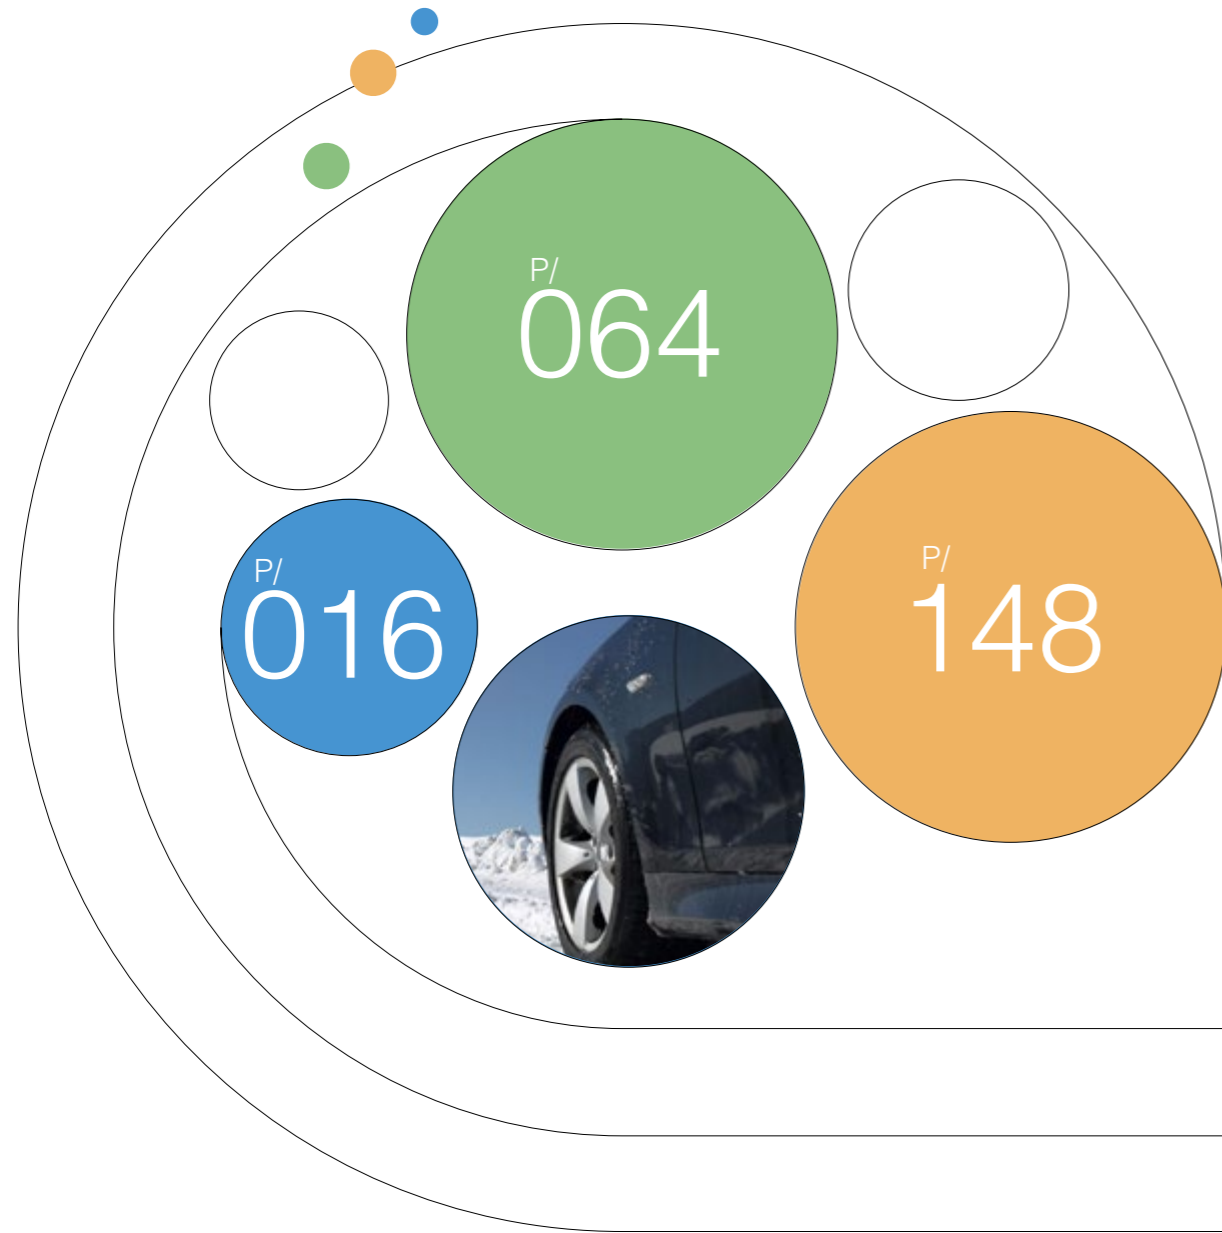

P/006
**COMPANY
INTRODUCTION**

P/012
**DISPLAY OF LINGLONG'S
STRENGTH**

P/008
SPORTS EVENTS

P/014
GLOBAL STRATEGIC LAYOUT

CONTENTS

PCR TIRE

TBR TIRE

SPECIALTY TIRE

COMPANY INTRODUCTION

Shandong Linglong Tyre Co., Ltd. is a global manufacturing enterprise with large scale facilities. After several years of innovation development, Linglong has been consistently among the top 20 tire enterprises in the world and top 3 in China for several years.

5+3 STRATEGY

Top 500
Most Valuable
Brands in China

Currently, Linglong has established manufacturing facilities in Dezhou China, Liuzhou China, Jingmen China and Thailand while maintaining the operations facility in Zhaoyuan China, in order to form its 5+3 global layout. On August 21, 2018, Linglong brought forward to build high performance radial tire project with annual capacity reaching 13.62 million units in the free trade area of Zrenjanin, southeast of Serbia, which demonstrates that Linglong's second overseas manufacturing base will be in Serbia. On 30th of March, 2019, Linglong International Europe D.O.O. Zrenjanin LLIE project launch ceremony was held in Serbia successfully.

Linglong is dedicated in achieving world-class tire company and target to be the world-class tire enterprise with global competitiveness, advanced technology and management.


SHANDONG
LINGLONG TIRE
CO.,LTD.

SPORTS EVENTS

JUVENTUS Official Tire



Cooperation with World Boxing Female Champion

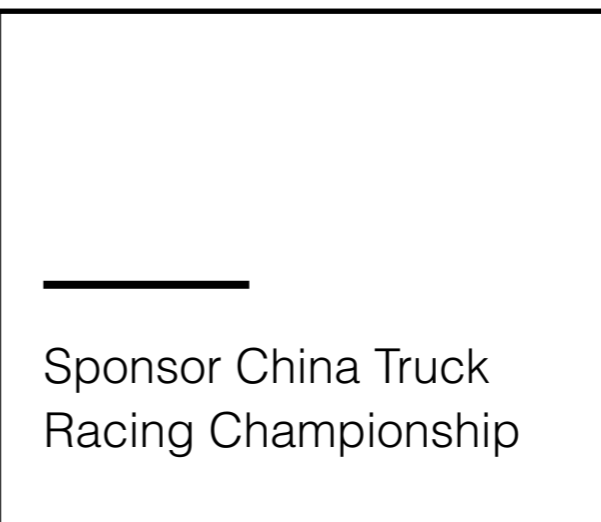

Sponsor China Truck Racing Championship



Sponsor the VfL Wolfsburg



Sponsor the Ratchaburi Mittr Phol FC



2017 Linglong Tire Youth Football Training Camp Opened in Thailand



Sponsor the FIBA ZONE 5 Africa Basketball Tournament



ATLAS Drift Team

Official Sponsor of Chinese Volleyball League



Sponsor China Grand Rally






DISPLAY OF LINGLONG'S STRENGTH

OEMs

Linglong invests in the construction of Sino-Asia Tire Proving Ground



GLOBAL STRATEGIC LAYOUT

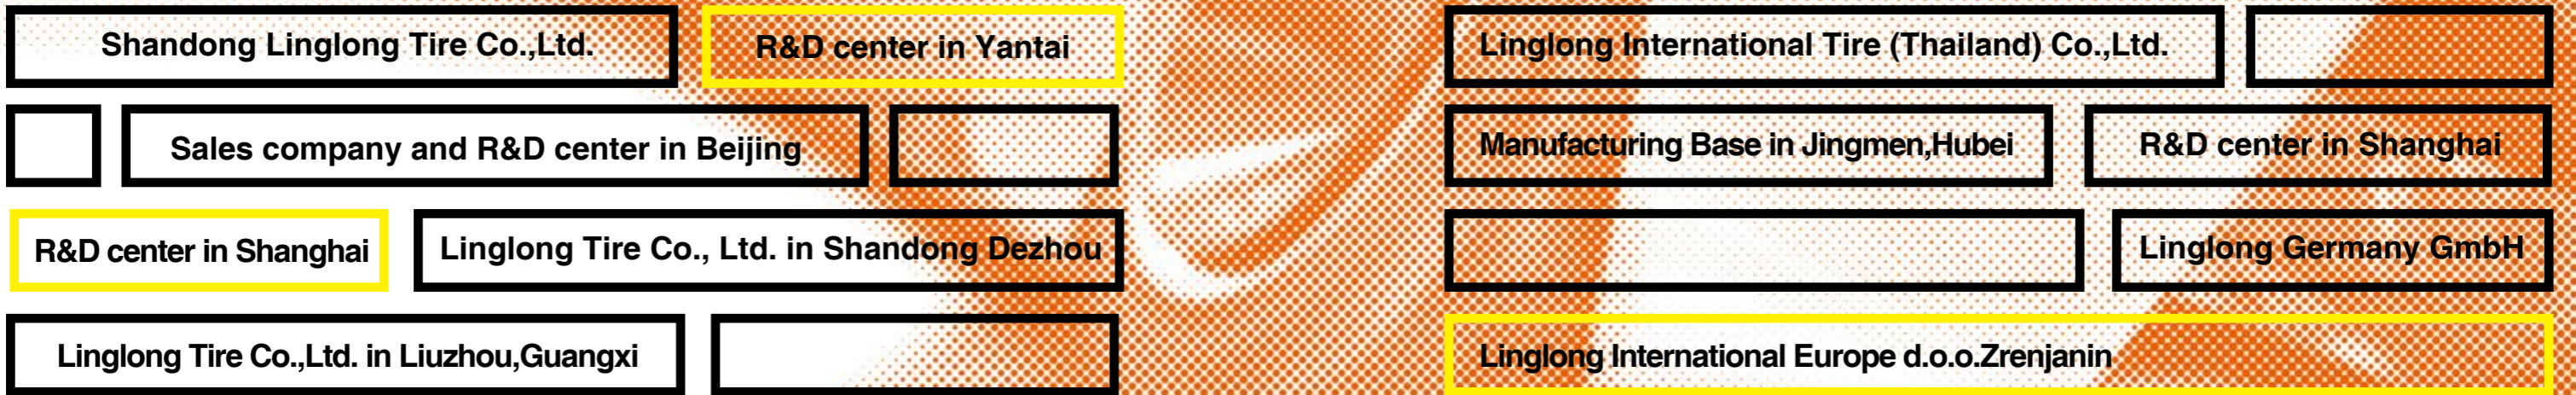

An aerial photograph of a rugged mountain landscape. A winding asphalt road curves through a valley with vibrant green and red vegetation. In the distance, several lakes are visible, and the sky is filled with dramatic, cloudy light. The text 'PCR TIRE' is overlaid in a white box on the right side of the image.

PCR TIRE

Passenger Car Tire



GREEN-Max ACRO New

Excellent handling and comfortable performance

1. Asymmetric tread pattern design for better drainage performance inside and grip performance outside.
2. Big shoulder blocks to effectively improve handling performance.
3. 4 longitudinal groove design for superior driving stability and comfortable ride.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195/45R17 XL	85	V	6 1/2J	515	290	608	195	6.5
215/45R18 XL	93	W	7J	650	290	651	213	7.2
225/45R17 XL	94	W	7 1/2J	670	290	634	225	7.7
225/45R19 XL	96	W	7 1/2J	710	290	685	225	7.2
235/45R18 XL	98	W	8J	750	290	669	236	7.2
245/45R20 XL	103	W	8J	875	290	728	243	7.2
255/35R20 XL	97	Y	9J	730	290	686	260	7.0
255/45R19 XL	104	W	8 1/2J	900	290	713	255	7.2
255/45R20 XL	105	W	8 1/2J	925	290	738	255	7.2
275/35R20 XL	102	Y	9 1/2J	850	290	700	278	7.0
275/45R18 XL	107	W	9J	975	290	705	273	7.2



GREEN-Max ACRO RFT New

Super ability Run-Flat tire

1. Asymmetric tread pattern design provides more stable driving and riding
2. Big shoulder blocks to effectively improve handling performance.
3. Carry linglong LRS run-flat technology for the safety of the vehicle driving escort.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
225/45RF17	91	W	7 1/2J	615	250	634	225	7.2
225/50RF17	94	W	7J	670	250	658	233	7.7
225/55RF17	97	W	7J	730	250	680	233	7.2
275/40RF20	102	W	9 1/2J	850	250	728	278	7.2



GREEN-Max All Season New

All Season Tire

1. Excellent handling;
2. Lower rolling resistance;
3. All season tire which is applicable to different weather and road conditions.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
145/70R13	71	T	4.50B	345	250	534	150	6.2
155/65R14	75	T	4 1/2J	387	250	558	157	7.0
155/70R13	75	T	4.50B	387	250	548	157	7.0
155/80R13	79	T	4.50B	437	240	578	157	7.0
165/60R14	75	H	5J	387	250	554	170	7.0
165/60R15	77	H	5J	412	250	579	170	7.0
165/65R14	79	T	5J	437	250	570	170	7.0
165/70R13	79	T	5.00B	437	250	562	170	7.0
165/70R14	81	T	5J	462	250	588	170	7.0
175/65R14	82	T	5J	475	250	584	177	7.0
175/65R15 XL	88	T	5J	560	290	609	177	7.0
175/70R13	82	T	5.00B	475	250	576	177	7.0
175/70R14 XL	88	T	5J	560	290	602	177	7.0
185/55R15	82	H	6J	475	250	585	194	7.0
185/60R14	82	H	5 1/2J	475	250	578	189	7.0
185/60R15 XL	88	H	5 1/2J	560	290	603	189	7.0
185/65R14	86	H	5 1/2J	530	250	596	189	6.2
185/65R15	88	H	5 1/2J	560	250	621	189	7.0
185/70R14	88	H	5 1/2J	560	250	616	189	6.2
195/45R16 XL	84	H	6 1/2J	500	290	582	195	6.7
195/50R15 XL	86	H	6J	530	290	577	201	7.0
195/50R16 XL	88	V	6J	560	290	602	201	6.7
195/55R15	85	H	6J	515	250	595	201	7.0
195/55R16	87	H	6J	545	250	620	201	7.0
195/60R15	88	H	6J	560	250	615	201	7.0
195/65R15	91	H	6J	615	250	635	201	7.0
205/45R16	83	V	7J	487	250	590	206	6.7
205/45R17 XL	88	V	7J	560	290	616	206	6.7
205/50R17 XL	93	V	6 1/2J	650	290	638	214	7.0
205/55R16	91	V	6 1/2J	615	250	632	214	7.0

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/55R17 XL	95	V	6 1/2J	690	290	658	214	7.0
205/60R16 XL	96	H	6J	710	290	652	209	7.0
205/65R15	94	H	6J	670	250	647	209	7.0
215/40R17 XL	87	V	7 1/2J	545	290	604	218	6.7
215/45R16 XL	90	V	7J	600	290	600	213	6.7
215/45R17 XL	91	V	7J	615	290	626	213	6.7
215/50R17 XL	95	V	7J	690	290	648	226	7.0
215/55R16 XL	97	V	7J	730	290	642	226	7.0
215/55R17 XL	98	V	7J	750	290	668	226	7.0
215/55R18 XL	99	V	7J	775	290	693	226	6.7
215/60R16 XL	99	H	6 1/2J	775	290	664	221	7.0
215/60R17 XL	100	V	6 1/2J	800	290	690	221	7.0
215/65R15	96	H	6 1/2J	710	250	661	221	6.7
215/65R16 XL	102	V	6 1/2J	850	290	686	221	6.7
225/35R19 XL	88	V	8J	560	290	641	230	6.7
225/40R18 XL	92	V	8J	630	290	637	230	6.7
225/45R17 XL	94	V	7 1/2J	670	290	634	225	7.0
225/45R18 XL	95	V	7 1/2J	690	290	659	225	6.7
225/50R17 XL	98	V	7J	750	290	658	233	7.0
225/55R16 XL	99	V	7J	775	290	654	233	6.7
225/55R17 XL	101	V	7J	825	290	680	233	7.0
225/60R16 XL	102	V	6 1/2J	850	290	676	228	6.7
225/60R17 XL	103	V	6 1/2J	875	290	702	228	6.7
225/65R17	102	H	6 1/2J	850	250	724	228	6.7
235/35R19 XL	91	V	8 1/2J	615	290	647	241	6.7
235/45R17 XL	97	V	8J	730	290	644	236	6.7
235/65R17 XL	108	V	7J	1000	290	738	240	6.7
245/40R18 XL	97	V	8 1/2J	730	290	653	248	7.0
245/45R17 XL	99	V	8J	775	290	652	243	6.7



GREEN-Max

UHP Tire with Excellent Wet Grip and Low Noise

1. Excellent handling performance;
2. Improved drainage performance to effectively reduce risk of hydroplaning;
3. Superior driving stability;
4. Comfortable ride;
5. Designed to fit premium cars and sports cars.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
185/35R17 XL	82	V	6 1/2J	475	290	562	188	7.7
185/45R15	75	V	6J	387	250	547	183	7.7
195/35R18 XL	88	W	7J	560	290	594	200	7
195/40R17 XL	81	V	8J	462	290	588	200	7.7
195/45R15	78	V	6 1/2J	425	250	557	195	7
195/45R16 XL	84	V	6 1/2J	500	290	582	195	7.8
205/35R18 XL	81	H	7 1/2J	462	290	601	212	7
205/40R17 XL	84	W	7 1/2J	500	290	596	212	7.8
205/40R18 XL	86	W	7 1/2J	530	290	621	212	7
205/45R16 XL	87	W	7J	545	290	590	206	7.8
205/45R17 XL	88	W	7J	560	290	616	206	7.8
205/45R17 XL	88	V	7J	560	290	616	206	7.8
205/50R16	87	W	6 1/2J	545	250	612	214	7.8
205/50R16	87	V	6 1/2J	545	250	612	214	7.8
205/50R17 XL	93	W	6 1/2J	650	290	638	214	7.8
205/55R16 XL	94	W	6 1/2J	670	290	632	214	7.8
215/30R20 XL	82	W	7 1/2J	475	290	638	218	7.7
215/35R18 XL	84	W	7 1/2J	500	290	607	218	7.8
215/35R19 XL	85	W	7 1/2J	515	290	633	218	7
215/40R16 XL	86	W	7 1/2J	530	290	578	218	7.8
215/40R17 XL	87	W	7 1/2J	545	290	604	218	7.8
215/40R18 XL	89	W	7 1/2J	580	290	629	218	7.8
215/45R16 XL	90	V	7J	600	290	600	213	7.5
215/45R17 XL	91	W	7J	615	290	626	213	7.8
215/45R18 XL	93	W	7J	650	290	651	213	7.8
215/50R17 XL	95	V	7J	690	290	648	226	7.8
215/50R17 XL	95	W	7J	690	290	648	226	7.8
215/55R16 XL	97	W	7J	730	290	642	226	7.8
215/55R17	94	V	7J	670	250	668	226	7.8
215/55R17 XL	98	W	7J	750	290	668	226	7.8
225/30R20 XL	85	W	8J	515	290	644	230	7.7
225/35R19 XL	88	W	8J	560	290	641	230	7.8

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
225/35R20 XL	90	Y	8J	600	290	666	230	7.8
225/40R18 XL	92	W	8J	630	290	637	230	7.8
225/45R17 XL	94	W	7 1/2J	670	290	634	225	7.8
225/45R18 XL	95	W	7 1/2J	690	290	659	225	7.8
225/45R19 XL	96	W	7 1/2J	710	290	685	225	7.8
225/50R16 XL	96	V	7J	710	290	632	233	7.8
225/50R17 XL	98	W	7J	750	290	658	233	7.8
225/50R19 XL	107	V	7J	975	290	709	233	7
225/55R16	95	V	7J	690	250	654	233	7.8
225/55R17	97	W	7J	730	250	680	233	7.8
225/55R17 XL	101	W	7J	825	290	680	233	7.8
225/55R19	99	H	7J	775	250	731	233	7
235/30R20 XL	88	Y	8 1/2J	560	290	650	242	7.8
235/35R19 XL	91	W	8 1/2J	615	290	647	241	7.8
235/40R18 XL	95	W	8 1/2J	690	290	645	241	7.8
235/45ZR17 XL	97	W	8J	730	290	644	236	7.8
235/45R18 XL	98	Y	8J	750	290	669	236	7.5
235/50R17	96	Y	7 1/2J	710	250	668	245	7.8
235/50R18 XL	101	W	7 1/2J	825	290	693	245	7.8
235/55R19 XL	105	W	7 1/2J	925	290	741	245	7.8
245/35R19 XL	93	Y	8 1/2J	650	290	655	248	7.7
245/35R20 XL	95	Y	8 1/2J	690	290	680	248	7.8
245/40R17	91	W	8 1/2J	615	250	628	248	7.8
245/40R18 XL	97	W	8 1/2J	730	290	653	248	7.8
245/40R19 XL	98	W	8 1/2J	750	290	679	248	7.7
245/45R17 XL	99	W	8J	775	290	652	243	7.8
245/45R18 XL	100	W	8J	800	290	677	243	7.8
245/45R19	98	Y	8J	750	250	703	243	7.8
245/45R20	99	W	8J	775	250	728	243	7
255/35R18 XL	94	Y	9J	670	290	635	260	7.7
255/45R18 XL	103	W	8 1/2J	875	290	687	255	7.8
265/30R19 XL	93	W	9 1/2J	650	290	643	271	7.8
265/35R18 XL	97	Y	9 1/2J	730	290	643	271	7.8
265/40R22 XL	106	V	9 1/2J	950	290	771	271	7.7
285/40R22 XL	110	V	10J	1060	290	787	290	7.7



GREEN-Max HP⁰¹⁰

HP Tire with Good Handling
Performance and Low Noise

1. Comfortable and quiet ride;
2. Low rolling resistance for better fuel efficiency;
3. Enhanced wet grip to effectively reduce risk of hydroplaning.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
*165/40R17 XL	75	V	6J	387	290	564	170	7.4
*165/45R16 XL	74	V	5 1/2J	375	290	554	165	7.4
*165/50R15	73	V	5J	365	250	547	170	7.4
*165/55R15	75	V	5J	387	250	563	170	7.3
*165/60R14	75	H	5J	387	250	554	170	7.3
*165/60R15	77	H	5J	412	250	579	170	7.3
*165/80R14	85	S	4 1/2J	515	240	620	165	7.3
*175/60R15	81	H	5J	462	250	591	177	7.3
*175/65R14	82	H	5J	475	250	584	177	7.3
*175/65R14 XL	86	H	5J	530	290	584	177	7.3
*175/65R15	84	H	5J	500	250	609	177	7.3
185/50R16	81	H	6J	462	250	592	194	7.5
185/55R14	80	H	6J	450	250	560	194	7.7
185/55R15	82	V	6J	475	250	585	194	7.7
185/60R14	82	H	5 1/2J	475	250	578	189	7.7
185/60R15	84	H	5 1/2J	500	250	603	189	7.7
185/60R15 XL	88	H	5 1/2J	560	290	603	189	7.7
185/65R14	86	H	5 1/2J	530	250	596	189	7.8
185/65R15	88	H	5 1/2J	560	250	621	189	7.8
195/50R15	82	V	6J	475	250	577	201	7.8
195/50R16 XL	88	V	6J	560	290	602	201	7.5
195/55R15	85	V	6J	515	250	595	201	7.8
195/55R16	87	V	6J	545	250	620	201	7.5
195/55R16 XL	91	H	6J	615	290	620	201	7.7
195/60R15	88	H/V	6J	560	250	615	201	6.0
195/60R16	89	H	6J	580	250	640	201	7.8

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195/65R14	89	H	6J	580	250	610	201	7.2
195/65R15	91	H/V	6J	615	250	635	201	7.8
195/65R15 WW	91	H	6J	615	250	635	201	7.8
205/50R16	87	V	6 1/2J	545	250	612	214	7.8
205/55R15	88	V	6 1/2J	560	250	607	214	7.2
205/55R16	91	H/V	6 1/2J	615	250	632	214	7.8
205/55R17 XL	95	V	6 1/2J	690	290	658	214	7.5
205/60R15	91	H/V	6J	615	250	627	209	7.8
205/60R16	92	H/V	6J	630	250	652	209	7.8
205/65R15	94	H/V	6J	670	250	647	209	7.8
205/65R16	95	H	6J	690	250	672	209	7.8
215/60R16	95	H	6 1/2J	690	250	664	221	7.8
215/60R16 XL	99	H/V	6 1/2J	775	290	664	221	7.7
215/60R17	96	H	6 1/2J	710	250	690	221	7.8
215/65R15 XL	100	H	6 1/2J	800	290	661	221	7.8
215/65R16	98	H	6 1/2J	750	250	686	221	7.7
225/45R17 XL	94	H	7 1/2J	670	290	634	225	7.7
225/65R16	100	H	6 1/2J	800	250	698	228	8.6
225/65R17	102	H	6 1/2J	850	250	724	228	8.6
225/70R16	103	H	6 1/2J	875	250	722	228	8.6
235/65R16	103	H	7J	875	250	712	240	8.2
255/65R16	109	H	7 1/2J	1030	250	738	260	8.1

*Three Grooves



GREEN-Max EcoTouring

Eco-friendly Tire

1. Low resistance;
2. Low noise;
3. Excellent wet performance.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
145/70R12	69	S	4.50B	325	250	509	150	6.2
145/70R13	71	T	4.50B	345	250	534	150	7.3
145/80R13	75	T	4.00B	387	240	562	145	7.1
155/65R13	73	T	4.50B	365	250	532	157	7.3
155/65R14	75	T	4 1/2J	387	250	558	157	7.3
155/70R12	73	S	4.50B	365	250	523	157	7.5
155/70R13	75	T	4.50B	387	250	548	157	7.3
155/80R13	79	T	4.50B	435	240	578	157	7.3
165/65R13	77	T	5.00B	412	250	544	170	6.0
165/65R14	79	T	5J	435	250	570	170	7.3
165/70R13	79	T	5.00B	435	250	562	170	6.0
165/70R14	81	T	5J	462	250	588	170	7.3
175/60R13	77	H	5.00B	412	250	540	177	7.3
175/60R13	77	T	5.00B	412	250	540	177	7.3
175/65R13	80	T	5.00B	450	250	558	177	7.3
175/65R14	82	T	5J	475	250	584	177	6.0
175/65R14 XL	86	T	5J	530	290	584	177	6.0
175/70R13	82	T	5.00B	475	250	576	177	6.0
175/70R14	84	T	5J	500	250	602	177	7.3
175/70R14 XL	88	T	5J	560	290	602	177	7.3
185/65R14	86	T	5 1/2J	530	250	596	189	7.5
185/65R15	88	T	5 1/2J	560	250	621	189	7.7
185/65R15 XL	92	T	5 1/2J	630	290	621	189	7.7
185/70R13	86	T	5.50B	530	250	590	189	7.3
185/70R14	88	T	5 1/2J	560	250	616	189	7.7
195/65R15	91	T	6J	615	250	635	201	6.0
195/65R15 XL	95	T	6J	690	290	635	201	6.0
195/70R14	91	T	6J	615	250	630	201	7.3
205/70R15	96	T	6J	710	250	669	209	7.7
*205/60R14	88	H	6J	560	250	602	209	7.7
235/75R15	105	T	6 1/2J	925	250	733	235	7.9

*Four Grooves



Taxi Tire

CROSSWIND R791

High Wear Resistance and Good Handling

1. High wear resistance;
2. Quiet and comfort;
3. Specially designed for taxis.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
145/80R12	74	T	4J	375	240	537	145	7.2
165/80R13	83	S	4.50B	485	240	594	165	7.7
175/70R14 XL	88	H	5J	560	250	602	177	7.7
175/50R15	75	H	5 1/2J	387	250	557	182	7.2
185/60R14	82	H	5 1/2J	475	250	578	189	8.3
185/60R15	84	H	5 1/2J	500	250	603	189	8.3
195/60R14	86	H	6J	530	250	590	201	8.5
195/60R15	88	H	6J	560	250	615	201	8.3
195/65R15	91	H	6J	615	250	635	201	8.3
205/55R16	91	H	6 1/2J	615	250	632	214	8.1



LL700

Good drainage low noise

1. Excellent wet handling performance;
2. Good driving stability;
3. Improved wear resistance.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
155/70R13	75	S	4.50B	387	250	548	157	8.1
175/70R13	82	T	5.00B	475	250	576	177	6.0
175/70R14	84	T	5J	500	250	602	177	6.0
185/70R13	86	T	5.50B	530	250	590	189	6.0
185/70R14	88	T	5 1/2J	560	250	616	189	6.0
195/70R14	91	T	6J	615	250	630	201	6.0
205/70R14 XL	95	T	6J	690	290	644	209	8.0
205/70R15	96	H	6J	710	250	669	209	8.0
215/70R14	96	T	6 1/2J	710	250	658	221	8.0
215/70R15	98	T	6 1/2J	750	250	683	221	8.0



CrossWind

Ultra High Performance

1. Directional tread pattern design;
2. Excellent handling performance;
3. Low noise.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195/45R16 XL	84	V	6 1/2J	500	290	582	195	7.8
195/50R15	82	V	6J	475	250	577	201	7.7
195/55R15	85	H	6J	515	250	595	201	7.7
205/40R17 XL	84	W	7 1/2J	500	290	596	212	7.8
205/45R16 XL	87	W	7J	545	290	590	206	7.8
205/45R17 XL	88	W	7J	560	290	616	206	7.8
205/50R16	87	V/W	6 1/2J	545	250	612	214	7.8
205/50R17 XL	93	W	6 1/2J	650	290	638	214	7.8
205/55R16 XL	94	W	6 1/2J	670	290	632	214	7.8
215/35R18 XL	84	W	7 1/2J	500	290	607	218	7.8
215/40R16 XL	86	W	7 1/2J	530	290	578	218	7.8
215/40R17 XL	87	W	7 1/2J	545	290	604	218	7.8
215/45R17 XL	91	W	7J	615	290	626	213	7.8
215/50R17	91	V	7J	615	250	648	226	7.7
215/50R17 XL	95	W	7J	690	290	648	226	7.7
215/55R16 XL	97	W	7J	730	290	642	226	7.8
215/55R17 XL	98	W	7J	750	290	668	226	7.8
225/35R19 XL	88	W	8J	560	290	641	230	7.8
225/35R20 XL	90	W	8J	600	290	666	230	7.7
225/40R18 XL	92	W	8J	630	290	637	230	7.8
225/45R17 XL	94	W	7 1/2J	670	290	634	225	7.8
225/45R18 XL	95	W	7 1/2J	690	290	659	225	7.8
225/50R16 XL	96	V	7J	710	290	632	233	7.8
225/50R17 XL	98	W	7J	750	290	658	233	7.8
225/55R17 XL	101	W	7J	825	290	680	233	7.7
235/30R20 XL	88	Y	8 1/2J	560	290	650	242	7.8

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
235/30R22 XL	90	W	8 1/2J	600	290	701	242	8.0
235/35R19 XL	91	W	8 1/2J	615	290	647	241	7.8
235/40R18 XL	95	W	8 1/2J	690	290	645	241	7.8
235/40R19 XL	96	V	8 1/2J	710	290	671	241	7.2
235/45R17 XL	97	W	8J	730	290	644	236	7.8
235/45R18	94	W	8J	670	250	669	236	7.7
235/45R20 XL	100	W	8J	800	290	720	236	7.8
235/50R18 XL	101	W	7 1/2J	825	290	693	245	7.8
235/55R17 XL	103	W	7 1/2J	875	290	690	245	7.7
235/55R19 XL	105	W	7 1/2J	925	290	741	245	7.7
245/30R22 XL	92	W	8 1/2J	630	290	707	248	8.0
245/35R20 XL	95	W	8 1/2J	690	290	680	248	7.7
245/40R17 XL	95	W	8 1/2J	690	290	628	248	7.7
245/40R18 XL	97	W	8 1/2J	730	290	653	248	7.8
245/40R19 XL	98	W	8 1/2J	750	290	679	248	7.7
245/45R17 XL	99	W	8J	775	290	652	243	7.8
245/45R18 XL	100	W	8J	800	290	677	243	7.8
245/45R20 XL	103	W	8J	875	290	728	243	7.7
255/35R19 XL	96	W	9J	710	290	661	260	7.7
255/30R22 XL	95	V	9J	730	290	713	260	8.0
255/35R20	97	W	9J	730	290	686	260	7.8
255/45R18 XL	103	W	8 1/2J	875	290	687	255	7.8
265/30R19 XL	93	W	9 1/2J	650	290	643	271	7.8
265/35R18 XL	97	H	9 1/2J	730	290	643	271	7.7
265/35R22 XL	102	W	9 1/2J	850	290	745	271	8.0
265/45R20	104	W	9J	900	250	746	266	7.8
265/50R20 XL	111	V	8 1/2J	1090	290	774	277	8.2
265/60R18 XL	114	H	8J	1180	290	775	272	8.2
275/40R20 XL	106	W	9 1/2J	950	290	728	278	8.3
275/45R20 XL	110	V	9J	1060	290	756	273	8.3
275/50R20 XL	113	W	8 1/2J	1150	290	784	284	8.5
275/55R20 XL	117	W	8 1/2J	1285	290	810	284	8.5
225/50R18	95	V	7J	690	250	683	233	7.8
245/50R20	102	V	7 1/2J	850	250	754	253	7.8
305/30R26 XL	109	W	11J	1030	290	844	313	8.3
305/35R24 XL	112	V	11J	1120	290	824	313	8.3
305/40R22 XL	114	V	11J	1180	290	803	313	8.3
305/45R22 XL	118	V	10J	1320	290	833	303	8.3



CrossWind HP⁰¹⁰

HP Tire with Excellent Handling Performance,
High mileage and Low noise

1. Comfortable and quiet ride;
2. Excellent handling performance;
3. Enhanced wet grip to effectively reduce risk of hydroplaning.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
*165/55R14	72	V	5J	355	250	538	170	7.4
*175/65R14	82	H	5J	475	250	584	177	7.3
*175/70R14	84	T	5J	500	250	602	177	7.3
*175/65R15	84	H	5J	500	250	609	177	7.3
185/55R16	83	V	6J	487	250	610	194	7.7
185/60R14	82	H	5 1/2J	475	250	578	189	7.7
185/60R14	82	V	5 1/2J	475	250	578	189	7.5
185/60R15	84	H	5 1/2J	500	250	603	189	7.7
185/65R14	86	H	5 1/2J	530	250	596	189	7.5
185/65R15	88	H	5 1/2J	560	250	621	189	7.7
185/70R14	88	H	5 1/2J	560	250	616	189	7.7
185/70R14 XL	92	H	5 1/2J	630	250	616	189	7.7
195/50R15	82	V	6J	475	250	577	201	7.7
195/50R16	84	V	6J	500	250	602	201	7.5
195/55R15	85	V	6J	515	250	595	201	7.7
195/60R15	88	H	6J	560	250	615	201	7.7
195/60R16 XL	93	H	6J	650	290	640	201	7.2
195/65R15	91	H	6J	615	250	635	201	7.7
195/70R14	91	H	6J	615	250	630	201	7.7
195/70R14 WL	91	H	6J	615	250	630	201	7.7
205/55R16	91	H	6 1/2J	615	250	632	214	7.7
205/60R15	91	H	6J	615	250	627	209	7.7

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/60R16	92	H	6J	630	250	652	209	7.7
205/60R16	92	V	6J	630	250	652	209	7.7
205/60R16 XL	96	H	6J	710	290	652	209	7.7
205/65R15	94	H	6J	670	250	647	209	7.7
215/50R17	91	V	7J	615	250	648	226	7.7
215/55R16	93	H	7J	650	250	642	226	7.7
215/55R16 XL	97	H	7J	730	290	642	226	7.7
215/55R17	94	V	7J	670	250	668	226	7.7
215/60R15	94	H	6 1/2J	670	250	639	221	7.7
215/60R16	95	H	6 1/2J	690	250	664	221	7.7
215/60R17	96	H	6 1/2J	710	250	690	221	7.7
215/65R15	96	H	6 1/2J	710	250	661	221	7.7
215/65R15 XL	100	H	6 1/2J	800	290	661	221	7.7
215/65R16	98	H	6 1/2J	750	250	686	221	7.7
215/65R17	99	H	6 1/2J	775	250	712	221	7.7
225/50R17	94	V	7J	670	250	658	233	7.7
225/55R16	95	V	7J	690	250	654	233	7.7
225/55R17	97	H	7J	730	250	680	233	8.5
225/55R18	98	H	7J	750	250	705	233	8.5
225/60R16	98	H	6 1/2J	750	250	676	228	8.5
225/60R17	99	H	6 1/2J	775	250	702	228	8.5
225/65R16	100	H	6 1/2J	800	250	698	228	8.5
225/65R17	102	H	6 1/2J	850	250	724	228	8.5
225/70R16	103	H	6 1/2J	875	250	722	228	8.5
235/55R17	99	H	7 1/2J	775	250	690	245	8.5
235/60R16	100	H	7J	800	250	688	240	8.5
235/60R17	102	H	7J	850	250	714	240	8.5
235/65R16	103	H	7J	875	250	712	240	8.5
235/65R17	104	H	7J	900	250	738	240	8.5
235/65R18	106	H	7J	950	250	763	240	8.5
255/70R15	108	S	7 1/2J	1000	250	739	260	9.1

*Three Grooves



CrossWind EcoTouring

Super Wear Resistance

1. Ultra mileage tire;
2. Low noise;
3. Improved water evacuation.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
*165/60R13	73	T	5.00B	365	250	528	170	7.7
*175/65R14	82	T	5J	475	250	584	177	7.7
*175/70R12	80	H	5.00B	450	250	551	177	7.7
*175/70R13	82	T	5.00B	475	250	576	177	7.7
*175/75R13	84	T	5J	500	250	592	177	6.0
*175/75R14	86	T	5J	530	250	618	177	6.0
185/65R14	86	T	5 1/2J	530	250	596	189	7.7
185/65R15	88	T	5 1/2J	560	250	621	189	7.7
185/70R13	86	T	5.50B	530	250	590	189	7.7
185/70R14	88	T	5 1/2J	560	250	616	189	7.7
195/50R15	82	H	6J	475	250	577	201	8.5
195/60R15	88	H	6J	560	250	615	201	8.5
195/65R15	91	H	6J	615	250	635	201	8.5
195/70R14	91	T	6J	615	250	630	201	7.7
205/55R16	91	H	6 1/2J	615	250	632	214	8.7
205/60R15	91	H	6J	615	250	627	209	8.5
205/60R16	92	H	6J	630	250	652	209	8.7
205/65R15	94	H	6J	670	250	647	209	8.5
205/65R16	95	H	6J	690	250	672	209	8.5
205/70R15	96	T	6J	710	250	669	209	8.5
205/75R15	97	S	5 1/2J	730	250	689	203	8.5
215/60R16	95	H	6 1/2J	690	250	664	221	8.7
215/65R16	98	H	6 1/2J	750	250	686	221	8.7
215/70R15	98	T	6 1/2J	750	250	683	221	8.5
215/70R16	100	T	6 1/2J	800	250	708	221	8.7
215/75R15	100	S	6J	800	250	703	216	8.5
225/60R16	98	H	6 1/2J	750	250	676	228	8.7
225/65R16	100	H	6 1/2J	800	250	698	228	8.7
225/70R15	100	T	6 1/2J	800	250	697	228	8.7
225/70R16 XL	107	H	6 1/2J	975	290	722	228	8.7
225/75R15	102	S	6J	850	250	719	223	8.7
235/70R16	106	H	7J	950	250	736	240	8.7
235/75R15	105	S	6 1/2J	925	250	733	235	8.7
245/70R16	107	H	7J	975	250	750	248	8.7
245/75R16	111	H	7J	1090	250	774	248	8.7
255/70R16	111	S	7 1/2J	1090	250	764	260	8.7
265/70R16	112	S	8J	1120	250	778	272	8.7
265/75R16	116	H	7 1/2J	1250	250	804	267	8.7

*Three Grooves



SPORT G5 New

High handling performance

1. Superior grip and handling performance;
2. Excellent stability.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/40R17 XL	84	W	7 1/2J	500	290	596	212	6.2
205/45R16 XL	87	V	7J	545	290	590	206	6.2
205/45R17 XL	88	W	7J	560	290	616	206	6.2
205/50R16 XL	91	V	6 1/2J	615	290	612	214	6.2
205/55R16	91	V	6 1/2J	615	250	632	214	6.2
215/45R17	87	W	7J	545	250	626	213	6.2





L688

Ultra High Performance Tire
Strong grip with good steering performance.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/40ZR17 XL	84	W	7 1/2J	500	290	596	212	7.9
205/50ZR16 XL	91	W	6 1/2J	615	290	612	214	7.9
205/50ZR17 XL	93	W	6 1/2J	650	290	638	214	7.9
205/55ZR16 XL	94	W	6 1/2J	670	290	632	214	7.9
215/35ZR18 XL	84	Y	7 1/2J	500	290	607	218	7.9
215/40ZR17 XL	87	W	7 1/2J	545	290	604	218	7.9
215/40ZR18 XL	89	W	7 1/2J	580	290	629	218	7.9
215/45ZR17 XL	91	W	7J	615	290	626	213	7.9
215/55ZR16 XL	97	W	7J	730	290	642	226	7.9
225/30ZR20 XL	85	Y	8J	515	290	644	230	7.9
225/35ZR20 XL	90	Y	8J	600	290	666	230	7.9
225/40ZR18 XL	92	W	8J	630	290	637	230	7.9
225/45ZR17 XL	94	W	7 1/2J	670	290	634	225	7.9
225/50ZR16	92	W	7J	630	250	632	233	7.9
235/40ZR18 XL	95	W	8 1/2J	690	290	645	241	7.9
235/45R17 XL	97	W	8J	730	290	644	236	7.9
235/50ZR18	97	W	7 1/2J	730	250	693	245	7.9
245/35ZR19 XL	93	Y	8 1/2J	650	290	655	248	7.9
245/35ZR20 XL	95	Y	8 1/2J	690	290	680	248	7.9
245/40ZR18 XL	97	W	8 1/2J	730	290	653	248	7.9
245/45ZR17	95	W	8J	690	250	652	243	7.9
245/45ZR18 XL	100	W	8J	800	290	677	243	7.9
255/35ZR20 XL	97	Y	9J	730	290	686	260	7.9
255/45ZR18 XL	103	W	8 1/2J	875	290	687	255	7.9
265/35ZR18 XL	97	Y	9 1/2J	730	290	643	271	7.9



L689

Ultra High Performance Tire

1. Excellent high speed performance and strong grip;
2. Solid shoulder design to provide superior steering performance.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
255/30R22 XL	95	W	9J	690	290	713	260	8.5
255/30R24 XL	97	W	9J	730	290	764	260	8.5
265/35R22 XL	102	V	9 1/2J	850	290	745	271	8.5
275/25R24 XL	95	W	10J	690	290	748	283	8.5
275/30R20 XL	97	W	9 1/2J	730	290	674	278	8.5
275/40R20 XL	106	V	9 1/2J	950	290	728	278	8.5
275/45R20 XL	110	V	9J	1060	290	756	273	8.5
275/55R20 XL	117	V	8 1/2J	1285	290	810	284	8.5
285/30R20 XL	99	W	10J	775	290	680	290	8.5
285/50R20 XL	116	V	9J	1250	290	794	297	8.5
295/30R26 XL	107	W	10 1/2J	975	290	838	301	8.5
305/30R26 XL	109	W	11J	1030	290	844	313	8.5
305/35R24 XL	112	V	11J	1120	290	824	313	8.5
305/40R22 XL	114	V	11J	1180	290	803	313	8.5
305/45R22 XL	118	V	10J	1320	290	833	303	8.5



SUV Tire



GREEN-Max 4x4 HP

New

SUV tires for urban highway use, with good handling and low noise

1. Excellent handling performance.
2. Enhanced drainage performance to effectively reduce risk of hydroplaning;
3. Superior longitudinal stability for more comfortable ride;
4. Low noise to offer a quiet ride.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPg)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/70R15	96	H	6J	710	250	669	209	8.8
215/55R18 XL	99	V	7J	775	290	693	226	7.7
215/55R18	95	V	7J	690	250	693	226	8.2
215/60R17	96	H	6 1/2J	710	250	690	221	8.8
215/65R16 XL	102	H	6 1/2J	850	290	686	221	8.8
215/70R16	100	H	6 1/2J	800	250	708	221	8.8
225/55R17 XL	101	V	7J	825	290	680	233	8.5
225/55R18	98	V	7J	750	250	705	233	7.7
225/55R19	99	V	7J	775	250	731	233	8.0
225/60R17	99	V	6 1/2J	775	250	702	228	7.7
225/60R18	100	H	6 1/2J	800	250	727	228	8.8
225/65R16	100	H	6 1/2J	800	250	698	228	8.8
225/65R17	102	H	6 1/2J	850	250	724	228	8.8
225/75R16	104	H	6J	900	250	744	223	8.8
235/50R18	97	V	7 1/2J	730	250	693	245	8.1
235/55R17 XL	103	V	7 1/2J	875	290	690	245	8.5
235/55R18 XL	104	V	7 1/2J	900	290	715	245	8.5
235/60R16	100	H	7J	800	250	688	240	8.8
235/60R17 XL	106	V	7J	950	290	714	240	8.8
235/60R18 XL	107	V	7J	975	290	739	240	8.8
235/65R17 XL	108	V	7J	1000	290	738	240	8.8
235/70R16	106	H	7J	950	250	736	240	8.8
245/65R17 XL	111	H	7J	1090	290	750	248	8.8
245/70R16 XL	111	H	7J	1090	290	750	248	8.8
255/50R19 XL	107	W	8J	975	290	739	265	8.1
255/55R18 XL	109	V/W	8J	1030	290	737	265	8.5
255/55R19 XL	111	V	8J	1090	290	763	265	8.5
255/60R17	106	H	7 1/2J	950	250	738	260	8.8
255/60R18 XL	112	V	7 1/2J	1120	290	763	260	8.8
255/65R17	110	H	7 1/2J	1060	250	764	260	8.8
265/50R20 XL	111	V	8 1/2J	1090	290	774	277	7.5
265/60R18	110	H	8J	1060	250	775	272	7.5
265/65R17	112	H	8J	1120	250	776	272	8.8
265/70R16	112	H	8J	1120	250	778	272	8.8
275/40R20 XL	106	V	9 1/2J	950	290	728	278	8.1
275/45R20 XL	110	V	9J	1060	290	756	273	8.1
275/55R17	109	V	8 1/2J	1030	250	734	284	8.8
275/60R18	113	H	8J	1150	250	787	279	8.8
275/70R16	114	H	8J	1180	250	792	279	8.8
285/35R22 XL	106	V	10J	950	290	759	290	8.1
295/35R21 XL	107	W	10 1/2J	975	290	739	301	8
315/35R20 XL	110	W	11J	1060	290	728	320	8



CROSSWIND 4x4 HP

SUV tire with low rolling resistance and low noise

1. Excellent handling performance;
2. Enhanced drainage performance to effectively reduce risk of hydroplaning;
3. Superior longitudinal stability for more comfortable ride;
4. Low noise to offer a quiet ride.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/70R15	96	H	6J	710	250	669	209	8.5
205/70R16	97	V	6J	730	250	694	209	8.7
215/60R17	96	H	6 1/2J	710	250	690	221	8.5
215/65R16 XL	102	H	6 1/2J	850	290	686	221	8.5
215/70R16	100	H	6 1/2J	800	250	708	221	8.5
225/55R17 XL	101	V	7J	825	290	680	233	8.2
225/55R18	98	V	7J	750	250	705	233	8.7
225/60R18	100	H	6 1/2J	800	250	727	228	8.5
225/65R16	100	H	6 1/2J	800	250	698	228	8.5
225/65R17	102	H	6 1/2J	850	250	724	228	8.5
225/75R16	104	H	6J	900	250	744	223	8.5
235/50R19 XL	103	V	7 1/2J	875	290	719	245	8.0
235/55R17 XL	103	V	7 1/2J	875	290	690	245	8.2
235/55R18 XL	104	V	7 1/2J	900	290	715	245	8.2
235/55R19 XL	105	V	7 1/2J	925	290	741	245	8.2
235/55R20 XL	105	V	7 1/2J	925	290	766	245	8.0
235/60R16	100	H	7J	800	250	688	240	8.5
235/60R17 XL	106	V	7J	950	290	714	240	8.5
235/60R18 XL	107	V	7J	975	290	739	240	8.5
235/65R17 XL	108	V	7J	1000	290	738	240	8.5
235/65R18	106	H	7J	950	250	763	240	8.5
235/70R16	106	H	7J	950	250	736	240	8.5
245/50R20	102	V	7 1/2J	850	250	754	253	8.7
245/55R19	103	V	7 1/2J	875	250	753	253	8.7
245/60R18	105	V	7J	925	250	751	248	8.5
245/65R17 XL	111	H	7J	1090	290	750	248	8.5
245/70R16 XL	111	H	7J	1090	290	750	248	8.5
255/50R19 XL	107	W	8J	975	290	739	265	8.7
255/50R20 XL	109	V	8J	1030	290	764	265	8.7
255/55R18 XL	109	V	8J	1030	290	737	265	8.2
255/55R19 XL	111	V	8J	1090	290	763	265	8.2
255/60R17	106	H	7 1/2J	950	250	738	260	8.5
255/60R18 XL	112	V	7 1/2J	1120	290	763	260	8.5
255/60R19	109	H	7 1/2J	1030	250	789	260	8.7
255/65R17	110	H	7 1/2J	1060	250	764	260	8.5
255/65R18	111	H	7 1/2J	1090	250	789	260	8.7
265/50R20 XL	111	V	8 1/2J	1090	290	774	277	8.7
265/60R18	110	H	8J	1060	250	775	272	8.5
265/65R17	112	H	8J	1120	250	776	272	8.5
265/65R18	114	H	8J	1180	250	801	272	8.7
265/70R16	112	H	8J	1120	250	778	272	8.5
265/70R18	116	T	8J	1250	250	829	272	8.7
275/55R17	109	V	8 1/2J	1030	250	734	284	8.2
275/55R20 XL	117	V	8 1/2J	1285	290	810	284	8.7
275/60R18	113	H	8J	1150	250	787	279	8.5
275/65R18	116	H	8J	1250	250	815	279	8.7
275/70R16	114	H	8J	1180	250	792	279	8.5



CROSSWIND A/T¹⁰⁰

Low noise all-weather tire

1. All Weather Capability
2. Comfortable Quiet Ride
3. Excellent Snow and Wet Braking
4. Off-Road Traction

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/70R15	/	96	T	6J	710	250	669	209	-
235/70R16	/	106	T	7J	950	250	736	240	-
235/75R15 XL	/	109	T	6 1/2J	1030	290	733	235	8.7
245/65R17 XL	/	111	T	7J	1090	290	750	248	-
245/70R16 XL	/	111	T	7J	1090	290	750	248	-
255/70R15	/	108	T	7 1/2J	1000	250	739	260	-
265/65R17	/	112	T	8J	1120	250	776	272	9.2
265/70R15	/	112	T	8J	1120	250	753	272	-
31X10.50R15LT	6PR	109	R	8 1/2J	1030	350	775	268	11.2
205R16LT	8PR	110/108	Q	6J	D1000 S1060	450	734	208	-
LT215/75R15	6PR	100/97	S	6J	D730 S800	350	703	216	-
LT225/75R15	6PR	102/99	S	6J	D775 S850	350	719	223	-
LT225/75R16	10PR	115/112	Q	6J	D1120 S1215	550	744	223	-
LT235/75R15	6PR	104/101	S	6 1/2J	D825 S900	350	733	235	-

- Refer to the upcoming specifications





CROSSWIND A/T

All Terrain Tire

1. Excellent wet performance;
2. Large angle grooves to improve self-cleaning ability;
3. An optimal balance between performance on road and off road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
175/70R14 XL	/	88	H	5J	560	290	602	177	8.2
175/80R14	/	88	T	5J	560	240	636	177	8.2
205/60R15	/	91	H	6J	615	250	627	209	8.8
205/60R16	/	92	H	6J	630	250	652	209	8.8
205/65R15	/	94	H	6J	670	250	647	209	8.8
205/70R15	/	96	T	6J	710	250	669	209	8.8
215/65R16	/	98	T	6 1/2J	750	250	686	221	8.2
215/70R16	/	100	T	6 1/2J	800	250	708	221	9.2
225/65R17 XL WL	/	106	T	6 1/2J	950	290	724	228	8
225/70R16	/	103	T	6 1/2J	875	250	722	228	9.2
225/70R16 XL	/	107	T	6 1/2J	975	290	722	228	9.2
225/75R15	/	102	S	6J	850	250	719	223	9.2
235/60R18 XL WL	/	107	T	7J	975	290	739	240	8
235/65R17	/	104	T	7J	900	250	738	240	9.2
235/70R16	/	106	T/Q	7J	950	250	736	240	9.2
235/75R15 XL	/	109	T	6 1/2J	1030	290	733	235	9.2
245/65R17 XL	/	111	T	7J	1090	290	750	248	10.3
245/70R16 XL	/	111	T	7J	1090	290	750	248	10.3
245/70R17	/	110	S	7J	1060	250	776	248	10.3
245/75R16	/	111	T	7J	1090	250	774	248	10.3
255/55R18 XL WL	/	109	T	8J	1030	290	737	265	8
255/70R15	/	108	T	7 1/2J	1000	250	739	260	10.3
255/70R16	/	111	S	7 1/2J	1090	250	764	260	10.3
265/60R18	/	110	T	8J	1060	250	775	272	11
265/60R18 WW	/	110	T	8J	1060	250	775	272	9
265/65R17	/	112	T/Q	8J	1120	250	776	272	10.7
265/70R15	/	112	S/T	8J	1120	250	753	272	11
265/70R16	/	112	Q/T	8J	1120	250	778	272	11
265/70R17	/	115	T	8J	1215	250	804	272	10.7
265/70R18	/	116	T	8J	1250	250	829	272	11
265/75R16	/	116	T/Q	7 1/2J	1250	250	804	267	11
P275/55R20	/	111	S	8 1/2J	1090	240	810	284	10.7
P275/60R20	/	114	T	8J	1180	240	838	279	10.7

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
275/65R17 XL WL	/	119	T	8J	1360	290	790	279	9
275/65R18	/	116	T	8J	1250	250	815	279	11
275/70R16	/	114	S	8J	1180	250	792	279	11
285/60R18	/	116	T	8 1/2J	1250	250	799	292	11
285/60R18 WL	/	116	T	8 1/2J	1250	250	799	292	9
P285/70R17	/	117	T	8 1/2J	1285	240	832	292	11
31X10.50R15LT	6PR	109	R	8 1/2J	1030	350	775	268	12.7
35X12.50R20LT	10PR	121	Q	10J	1450	450	877	318	12.7
205R16LT	8PR	110/108	R/Q	6J	D1000 S1060	450	734	208	11.0
LT215/75R15	6PR	100/97	S	6J	D730 S800	350	703	216	11
LT215/85R16	10PR	115/112	Q	6J	D1120 S1215	550	772	216	11
LT225/75R15	6PR	102/99	S	6J	D775 S850	350	719	223	11.7
LT225/75R16	10PR	115/112	Q	6J	D1120 S1215	550	744	223	11.7
LT235/75R15	6PR	104/101	R/S	6 1/2J	D825 S900	350	733	235	11.7
LT235/80R17	10PR	120/117	R	6 1/2J	D1285 S1400	550	808	235	11.7
LT235/85R16	10PR	120/116	S	6 1/2J	D1250 S1400	550	806	235	11.7
LT245/70R17	10PR	119/116	Q	7J	D1250 S1360	550	776	248	12.3
LT245/75R16	10PR	120/116	Q	7J	D1260 S1380	550	774	248	12.3
LT245/75R17	10PR	121/118	R	7J	D1320 S1450	550	800	248	12.3
LT265/60R20	10PR	121/118	R	8J	D1320 S1450	550	826	272	12.7
LT265/70R17	10PR	121/118	R/Q	8J	D1320 S1450	550	804	272	12.7
LT265/75R16	10PR	123/120	R	7 1/2J	D1400 S1550	550	804	267	12.7
LT265/70R18	10PR	124/121	S	8J	D1450 S1600	550	829	272	12.7
LT275/65R18	10PR	123/120	S	8J	D1400 S1550	550	815	279	12.7
LT275/65R20	10PR	126/123	S	8J	D1550 S1700	550	866	279	12.7
LT275/70R18	10PR	125/122	S	8J	D1500 S1650	550	843	279	12.7
LT285/55R20	10PR	122/119	S	9J	D1360 S1500	550	822	297	12.7
LT285/65R20	10PR	127/124	S	8 1/2J	D1600 S1750	550	878	292	12.7
LT285/70R17	8PR	121/118	S	8 1/2J	D1320 S1450	450	832	292	12.7
LT285/75R16	10PR	126/123	R	8J	D1550 S1700	550	834	286	12.7
LT305/70R16	10PR	124/121	R	9J	D1450 S1600	450	834	311	12.7
LT305/70R17	8PR	119/116	R	9J	D1250 S1360	350	860	311	12.7



CROSSWIND H/T

SUV Tire for Urban Road Use, with Low Noise and good dry/wet performance.

- 1. High drainage capability;
- 2. High comfort and low noise;
- 3. Excellent handling performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
215/70R16	/	100	T	6 1/2J	800	250	708	221	9
225/70R16	/	103	T	6 1/2J	875	250	722	228	9.5
225/70R16 XL	/	107	T	6 1/2J	975	290	722	228	9.5
235/65R17	/	104	T	7J	900	250	738	240	9.7
235/70R16	/	106	T	7J	950	250	736	240	9.5
235/75R15 XL	/	109	T	6 1/2J	1030	290	733	235	9.7
245/65R17	/	107	T	7J	975	250	750	248	9.7
245/70R16	/	107	T	7J	975	250	750	248	9.7
245/70R17	/	110	T	7J	1060	250	776	248	9.7
245/75R16	/	111	T	7J	1090	250	774	248	9.7
255/70R16	/	111	T	7 1/2J	1090	250	764	260	9.7
265/65R17	/	112	T	8J	1120	250	776	272	9.7
265/70R16	/	112	T	8J	1120	250	778	272	9.5
265/70R17	/	115	T	8J	1215	250	804	272	10.5
265/75R16	/	116	T	7 1/2J	1250	250	804	267	9.7
275/55R20 XL	/	117	T	8 1/2J	1285	290	810	284	9
275/65R17	/	115	S	8J	1215	250	790	279	9.5
285/65R17	/	116	S	8 1/2J	1250	250	802	292	9.5
31X10.5R15LT	6PR	109	R	8 1/2J	1030	350	775	268	11.2
LT215/85R16	10PR	115/112	S	6J	D1120 S1215	550	772	216	11.2
LT225/75R16	10PR	115/112	S	6J	D1120 S1215	550	744	223	11.2
LT235/85R16	10PR	120/116	R	6 1/2J	D1250 S1400	550	806	235	11.2
LT245/75R16	10PR	120/116	R	7J	D1250 S1400	550	774	248	11.2
LT245/75R17	10PR	121/118	R	7J	D1320 S1450	550	800	248	11.2
LT265/70R17	10PR	121/118	R	8J	D1320 S1450	550	804	272	11.2
LT265/70R18	10PR	124/121	R	8J	D1450 S1600	550	829	272	11.2
LT265/75R16	10PR	123/120	R	7 1/2J	D1400 S1550	550	804	267	11.2



CROSSWIND M/T

Mud-Terrain Tire

- 1. High floatation;
- 2. Higher load-carrying capacity;
- 3. Excellent Self-cleaning performance;
- 4. Aggressive tread pattern and sidewall design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
30X9.50R15LT	6PR	104	Q	7 1/2J	900	350	756	240	13.7
31X10.50R15LT	6PR	109	Q	8 1/2J	1030	350	781	268	14.7
33X12.50R15LT	6PR	108	Q	10J	1000	250	832	318	14.7
33X12.50R18LT	10PR	118	Q	10J	1320	450	832	318	14.7
33X12.50R20LT	10PR	114	Q	10J	1180	450	832	318	16
33X12.50R22LT	10PR	109	Q	10J	1030	450	826	318	16.0
35X12.50R17LT	10PR	121	Q	10J	1450	450	883	318	14.7
35X12.50R18LT	10PR	123	Q	10J	1550	450	883	318	14.6
35X12.50R20LT	10PR	121	Q	10J	1450	450	883	318	16
35X12.50R22LT	10PR	117	Q	10J	1285	450	877	318	16.0
38X15.50R20LT	8PR	125	Q	12J	1650	350	959	395	15.9
205R14C	8PR	109/107	R	6J	D975 S1030	450	686	208	11.5
205R16LT	8PR	110/108	Q	6J	D1000 S1060	450	740	208	14.7
215/80R16	/	107	S	6J	975	290	750	216	11.5
LT215/75R15	6PR	100/97	Q	6J	D730 S800	350	709	216	13.7
LT225/75R16	8PR	110/107	Q	6J	D975 S1060	450	750	223	13.7
LT235/70R16	8PR	110/107	Q	7J	D975 S1060	450	742	240	13.7
LT235/75R15	6PR	104/101	Q	6 1/2J	D825 S900	350	739	235	13.7
LT235/80R17	10PR	120/117	Q	6 1/2J	D1285 S1400	550	808	235	13.7
LT235/85R16	10PR	120/116	Q	6 1/2J	D1260 S1380	550	806	235	13.7
LT245/75R16	10PR	120/116	Q	7J	D1260 S1380	550	774	248	13.7
LT255/70R16	8PR	115/112	Q	7 1/2J	D1120 S1215	450	770	260	14.7
LT265/70R16	6PR	110/107	Q	8J	D975 S1060	350	784	272	14.7
LT265/70R17	10PR	121/118	Q	8J	D1320 S1450	550	810	272	14.6
LT265/75R16	10PR	123/120	Q	7 1/2J	D1400 S1550	550	810	267	14.7
LT275/70R18	10PR	125/122	Q	8J	D1500 S1650	550	843	279	14.7
LT285/55R20	10PR	122/119	Q	9J	D1360 S1500	550	822	297	14.7
LT285/65R20	10PR	127/124	Q	8 1/2J	D1600 S1750	550	884	292	14.7
LT285/70R17	8PR	121/118	Q	8 1/2J	D1320 S1450	450	838	292	14.7
LT285/70R17	10PR	121/118	Q	8 1/2J	D1320 S1450	550	838	292	14.7
LT285/75R16	10PR	126/123	Q	8J	D1550 S1700	550	840	286	14.7
LT305/70R16	8PR	118/115	Q	9J	D1215 S1320	350	840	311	14.7
LT305/70R16	10PR	124/121	Q	9J	D1450 S1600	450	834	311	14.7
LT305/70R17	8PR	119/116	Q	9J	D1250 S1360	350	866	311	14.7
LT315/75R16	8PR	121/118	Q	8 1/2J	D1320 S1450	350	884	313	14.6
LT315/75R16	10PR	127/124	Q	10J	D1600 S1750	450	884	313	14.6



LMB3

All Terrain tire

1. Excellent traction and handling performance;
2. Excellent wear resistance performance;
3. All Terrain Tire.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPg)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
215/75R15	100	S	6J	800	250	703	216	9.2
P215/75R15	100	S	6J	800	250	703	216	9.2
235/75R15	105	S	6 1/2J	925	250	733	235	9.2
P235/75R15	105	S	6 1/2J	925	250	733	235	9.2



RADIAL620

All Terrain tire

1. Excellent wet performance;
2. An optimal balance between performance on road and off road.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/70R15	96	H	6J	710	250	669	209	8.0
205/80R16 XL	104	T	5 1/2J	900	280	734	203	8.0
215/65R16	98	H	6 1/2J	750	250	686	221	10.2
215/70R16	100	T	6 1/2J	800	250	708	221	8.0
225/75R16 XL	108	R	6J	1000	290	744	223	9.2
235/65R17 XL	108	H	7J	1000	290	738	240	10.2
235/70R16	106	T	7J	950	250	736	240	10.2
245/70R16	107	H	7J	975	250	750	248	10.2
245/70R16 XL	111	H	7J	1090	290	750	248	10.2
265/70R15	112	T	8J	1120	250	753	272	10.2
265/70R16	112	H	8J	1120	250	778	272	10.2
275/55R17	109	V	8 1/2J	1030	250	734	284	10.2



Light Truck Tire





GREEN-Max Van

Commercial tire with high grip performance

1. Big pattern blocks on the shoulder increase traction and 1. Better grip performance;
2. Low rolling resistance for high energy efficiency.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
5.00R12LT	10PR	88/86	P	3.50B	D530 S560	550	568	143	7.7
155R12C	8PR	88/86	N	4.50B	D530 S560	450	553	157	8.0
155R13C	8PR	91/89	P	4 1/2J	D580 S615	450	578	157	8.0
165R13C	8PR	94/93	R	4 1/2J	D650 S670	450	594	165	7.9
165/70R13LT	8PR	88/85	S	5.00B	D515 S560	450	562	170	7.5
165/70R14C	6PR	89/87	R	5J	D545 S580	375	588	170	8.0
175R13C	8PR	97/95	Q	5.00B	D690 S730	450	610	177	8.3
175R14LT	8PR	99/97	R	5J	D730 S775	450	636	177	8.2
175/70R14C	6PR	95/93	T	5J	D650 S690	375	602	177	8.0
175/75R14LT	8PR	94/91	S	5J	D615 S670	450	618	177	7.7
185R14C	8PR	102/100	R	5 1/2J	D800 S850	450	650	188	8.8
185R15LT	8PR	103/102	R	5 1/2J	D850 S875	450	677	189	8.7
185/75R16C	8PR	104/102	R	5J	D850 S900	475	684	184	9.3
195R14C	8PR	106/104	P	5 1/2J	D900 S950	450	666	198	9.0
195R15C	8PR	106/104	R	5 1/2J	D900 S950	450	693	196	9.2
195/70R15C	8PR	104/102	R	6J	D850 S900	450	655	201	9.8
195/75R16C	8PR	107/105	R	5 1/2J	D925 S975	475	698	196	9.8
205R14C	8PR	109/107	R	6J	D975 S1030	450	686	208	9.3
205/70R15C	8PR	106/104	S	6J	D900 S950	450	669	209	9.3
205/75R16C	8PR	110/108	R	5 1/2J	D1000 S1060	475	714	203	9.3
215R14C	8PR	112/110	R	6J	D1060 S1120	450	700	216	9.2
215/70R15C	8PR	109/107	R	6 1/2J	D975 S1030	450	683	221	9.2
215/70R16C	6PR	108/106	T	6 1/2J	D950 S1000	375	708	221	9.3
215/75R16C	8PR	113/111	R	6J	D1090 S1150	475	728	216	9.8
225/70R15C	8PR	112/110	R	6 1/2J	D1060 S1120	450	697	228	9.8
225/75R16C	10PR	121/120	R	6J	D1400 S1450	575	744	223	9.8
225/75R16LT	12PR	119/116	R	6J	D1250 S1360	650	744	223	9.8
255/70R15C	6PR	112/110	S	7 1/2J	D1060 S1120	375	739	260	9.7
165/70R14 XL	/	85	H	5J	515	290	588	170	7.7
185/65R14 XL	/	90	H	5 1/2J	600	290	596	189	7.7
185/70R14 XL	/	92	H	5 1/2J	630	290	616	189	7.7



GREEN-Max Van^{HP}

Commercial tire with high grip performance

1. Excellent stability;
2. Great grip performance and driving force of turning;
3. Low rolling resistance for higher energy efficiency.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
175/65R14C	6PR	90/88	T	5J	D 560 S 600	375	584	177	7.7
215/65R15C	6PR	104/102	T	6 1/2J	D 850 S 900	375	661	221	9.2
195/65R16C	8PR	104/102	R	6J	D 850 S 900	475	660	201	9
205/65R16C	8PR	107/105	R	6J	D 925 S 975	475	672	209	9.2
215/60R16C	6PR	103/101	T	6 1/2J	D 825 S 875	375	664	221	9.2
215/65R16C	8PR	109/107	R	6 1/2J	D 975 S1030	475	686	221	9.2
225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	475	698	228	9.2
235/65R16C	8PR	115/113	R	7J	D 1150 S 1215	475	712	240	9.2



RADIAL620

Suitable For Off-Road Tire

1. Excellent traction.
2. Skid prevention on wet road.
3. Robust structure to improve bead durability.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
185R14C	8	102/100	Q	5 1/2J	D800 S850	450	652	189	8.7
195R14C	8	106/104	Q	5 1/2J	D875 S925	450	668	196	8.9



R701

Lower Weight Trailer Tire

- 1. Low fuel consumption;
- 2. Budget Tires.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
135/80R13 XL	/	74	N	3.50B	375	280	546	133	6.2
145/70R13	/	74	N	4.50J	345	250	534	150	6.2
145/80R13 XL	/	79	N	4.00B	437	280	562	145	6.2
155/70R12	/	73	S	4.50B	365	250	523	157	6.2
155/70R13	/	75	N	4.50B	387	250	548	157	6.2
155/80R13 XL	/	84	N	4.50B	500	280	578	157	6.2
165/55R14	/	72	H	5J	355	250	538	170	6.2
165/65R13	/	77	N	5.00B	412	250	544	170	6.2
165/70R13	/	79	N	5.00B	437	250	562	170	6.2
175/65R14	/	82	T/H	5J	475	250	584	177	6.2
175/70R13	/	82	N/H	5.00B	475	250	576	177	6.2
175/70R13 XL	/	86	N	5.00B	530	290	576	177	6.2
185/60R14	/	82	H	5 1/2J	475	250	578	189	6.2
185/70R13	/	86	N	5 1/2J	530	250	590	189	6.2
195/55R15	/	85	H	6J	515	250	595	201	6.2
195/60R15	/	88	H	6J	560	250	615	201	6.2
195/70R14 XL	/	96	N	6J	710	290	630	201	6.2
155/70R12C	/	100/98	N	4 1/2J	D750 S800	650	523	157	6.7
155/70R12C	/	104/102	N	4 1/2J	D850 S900	625	523	157	6.7
165R13C	8PR	94/92	N	4 1/2J	D630 S670	450	596	167	6.7
165R13C	8PR	96/94	N	4 1/2J	D670 S710	450	596	167	6.7
165R14LT	6PR	91/90	S	4 1/2J	D600 S615	350	620	165	7.5
165R14LT	8PR	96/95	T	4 1/2J	D690 S710	450	620	165	7.5
185R14C	8PR	102/100	N	5 1/2J	D800 S850	450	650	188	6.7
185R14C	/	104/102	N	5 1/2J	D850 S900	500	650	188	6.7
185/60R12C	/	104/101	N	5 1/2J	D825 S900	650	527	189	6.7
185/70R13C	/	106/104	N	5 1/2J	D900 S950	600	590	189	6.2
195R14C	8PR	106/104	N	5J	D900 S950	450	666	198	6.7
195/50R13C	/	104/101	N	6J	D825 S900	650	526	201	6.7
195/55R10C	/	98/96	N	6J	D710 S750	625	468	201	6.7
195/60R12C	/	104/102	N	6J	D850 S900	650	539	202	6.7



CROSSWIND R781

Budget Tire

- 1. Low fuel consumption;
- 2. Specially designed for trailer.

Trailer Tire

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
ST175/80R13	6PR	91/87	M	5J	D545 S615	350	610	177	6.3
ST205/75R14	6PR	100/96	M	5 1/2J	D710 S800	350	664	203	6.3
ST205/75R15	8PR	107/102	M	5 1/2J	D850 S975	450	689	203	6.3
ST205/75R15	6PR	101/97	M	5 1/2J	D730 S825	350	689	203	6.3
ST215/75R14	6PR	102/98	M	6J	D750 S850	350	678	216	6.3
ST225/75R15	8PR	113/108	M	6J	D1000 S1150	450	719	223	6.3
ST225/75R15	10PR	117/112	M	6J	D1120 S1285	550	719	223	6.3
ST235/80R16	10PR	123/119	M	6 1/2J	D1360 S1550	550	782	235	6.3
ST235/85R16	10PR	125/121	M	6 1/2J	D1450 S1650	550	806	235	6.3



LMC4

Increased mileage with high wear resistance

Excellent wear resistance performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
6.50R15LT	8PR	101/97	N	5.50F	D730 S825	460	730	185	9.7
6.50R16C	10PR	107/103	N	5.50F	D875 S975	560	750	185	9.7
6.50R16C	10PR	108/107	L	5.50F	D975 S1000	500	750	185	9.7
6.50R16C	12PR	110/105	M	5.50F	D925 S1060	670	750	185	9.7
7.00R15LT	10PR	110/105	L	5.50F	D925 S1060	560	750	200	9.7
7.50R16LT	10PR	116/112	L	6.00G	D1120 S1250	560	805	215	11.2
7.50R16LT	14PR	122/118	L	6.00G	D1320 S1500	770	805	215	11.2
7.50R16LT	12PR	120/116	M	5.50F	D1250 S1400	670	805	215	11.2



LMC7

All Terrain Tire

Excellent wear resistance performance

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195R15C	8PR	106/104	Q	5 1/2J	D900 S950	450	690	198	9.7



LMC8

Excellent wear resistance performance

High steering and abrasion performance

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195R14C	8PR	106/104	P	5 1/2J	D900 S 950	450	668	196	9.2
195R14C(WHITE)	8PR	106/104	P	5 1/2J	D 900 S 950	450	668	196	9.2
205R14C	8PR	109/107	R	6 J	D 975 S 1030	450	684	208	9.2
205R15C	8PR	110/108	R	6 J	D 1000 S 1060	450	711	209	9.2
205R15C(WHITE)	8PR	110/108	R	6 J	D 1000 S 1060	450	711	209	9.2



LMC5

Increased mileage with high wear resistance

1. Freight vehicles;
2. High mileage.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
185R14C	8PR	102/100	Q/N	5 1/2J	D800 S850	450	652	189	10.2
195R14LT	8PR	106/104	P	5 1/2J	D900 S950	450	668	196	10.2



LMB3

All Terrain tire

1. Excellent traction and handling performance;
2. Excellent wear resistance performance;
3. All Terrain Tire.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195/70R15C	8PR	99/96	R	6J	D710 S775	450	655	201	10.2
195/70R15C(WHITE)	8PR	104/102	R	6J	D850 S900	450	655	201	10.2



RADIAL655

Excellent steering and high wear resistance

1. Good drainage performance and stability;
2. Good wear resistance;
3. Excellent steering performance..

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
5.00R12LT	8PR	83/81	N	3.50B	D462 S487	450	568	143	7.2



LL776

Budget Tire with high wear resistance

1. Good steering performance;
2. High wear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
5.00R12LT	8PR	83/81	P	3.50B	D462 S487	400	568	143	7.8
5.00R12LT	10PR	88/86	P	3.50B	D530 S560	500	568	143	7.8
5.50R12LT	10PR	92/90	P	3.50B	D600 S630	560	595	160	7.7
5.50R13LT	12PR	97/95	P	4.00B	D690 S730	625	620	160	8



RADIAL616

Increased mileage with high wear resistance

1. Excellent traction and handling performance
2. Excellent wear resistance performance
3. All Terrain Tire

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
215R15C	8PR	111/109	T	6J	D1030 S1090	450	725	216	10.2
30X9.50R15LT	6PR	104	Q	7 1/2J	900	350	750	240	11.2
31X10.50R15LT	6PR	109	Q	8 1/2J	1030	350	775	268	11.2



RADIAL R751

High Mileage Tire

1. High wear resistance;
2. Self-cleaning properties;
3. All Season Tire for light trucks.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
6.00R13LT	10PR	98/93	N	4.50B	D650 S750	550	655	170	10.2
6.00R14LT	10PR	100/96	N	4 1/2J	D710 S800	550	680	170	10.2
6.00R15LT	8PR	97/92	L	4.50E	D630 S730	460	705	170	10.2
7.00R16LT	12PR	115/110	M/N	5.50F	D1060 S1215	670	775	200	10.7



LL850

Designed For Snow And Ice Road Exhibits Wear Resistance

1. An all position heavy duty light truck tire suitable for commercial applications.
2. Suitable for both on and off road use.
3. Pinned for studs to provide additional winter traction.
4. M&S designated.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
LT235/80R17	10PR	120/117	Q	6 1/2J	D1285 S1400	550	808	235	13.7
LT235/85R16	10PR	120/116	Q	6 1/2J	D1250 S1400	550	806	235	13.7
LT245/75R16	10PR	120/116	Q	7J	D1250 S1400	550	774	248	13.7
LT265/70R17	10PR	121/118	Q	8J	D1320 S1450	550	804	272	14.7
LT265/75R16	10PR	123/120	Q	7 1/2J	D1400 S1550	550	804	267	14.7
LT275/65R18	10PR	123/120	Q	8J	D1400 S1550	550	815	279	14.7
LT285/70R17	8PR	121/118	Q	8 1/2J	D1320 S1450	550	832	292	14.7
LT285/75R16	10PR	126/123	Q	8J	D1550 S1700	550	834	286	14.7



RADIAL666

Commercial tire with Excellent wear and wet performance

- 1. Excellent traction;
- 2. Excellent wet braking;
- 3. High wear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
155R12C	6PR	83/81	N	4.50B	D462 S487	350	553	157	7.8
165/70R14C	6PR	89/87	R	5J	D545 S580	375	588	170	8.3
175R13LT	8PR	97/95	Q	5.00B	D690 S730	450	609	182	7.8
175/75R16C	8PR	101/99	R	5J	D775 S825	475	668	177	8.3
185R14C	8PR	102/100	R/Q	5 1/2J	D800 S850	450	652	189	9.5
185R14LT	6PR	97/95	R	5 1/2J	D690 S730	350	652	189	9.5
185R14LT	8PR	102/100	R	5 1/2J	D800 S850	450	652	189	9.5
185/75R16C	8PR	104/102	R	5J	D850 S900	475	684	184	8.3
195R14C	8PR	106/104	P	5 1/2J	D900 S950	450	668	196	9.4
195R14C WR	8PR	106/104	P	5 1/2J	D900 S950	450	668	196	9.4
195R15C	8PR	106/104	R	5 1/2J	D900 S950	450	690	198	8.5
195R15C WR	8PR	106/104	R	5 1/2J	D900 S950	450	690	198	8.5
195/65R16C	8PR	104/102	R	6J	D850 S900	475	660	201	9.2
195/70R15C	8PR	104/102	R	6J	D850 S900	450	655	201	10.2
195/70R15LT	10PR	104/102	R	6J	D850 S900	550	655	201	10.2
195/75R14C	8PR	106/104	R	5 1/2J	D900 S950	475	648	196	9.7
195/75R16C	8PR	107/105	R	5 1/2J	D925 S975	475	698	196	9.7
205/65R16C	8PR	107/105	R	6J	D925 S975	475	672	209	9.2
205/70R15C	8PR	106/104	S	6J	D900 S950	450	669	209	9.2
205/75R14C	8PR	109/107	R	5 1/2J	D975 S1030	475	664	203	9.2
205/75R16C	8PR	110/108	R	5 1/2J	D1000 S1060	475	714	203	9.2
215R14C	8PR	110/108	R	6J	D1000 S1060	450	700	218	9.7
215/65R16C	8PR	109/107	R	6 1/2J	D975 S1030	475	686	221	9.2
215/70R15C	8PR	109/107	R	6 1/2J	D975 S1030	450	683	221	9.7
215/70R15C WR	8PR	109/107	R	6 1/2J	D975 S1030	450	683	221	9.7
215/70R16C	6PR	108/106	S	6 1/2J	D950 S1000	375	708	221	9.5
215/75R14C	8PR	112/110	R	6J	D1060 S1120	475	678	216	9.7
215/75R16C	8PR	113/111	R	6J	D1090 S1150	475	728	216	9.2
225/65R16C	8PR	112/110	R	6 1/2J	D1060 S1120	475	698	228	9.3
225/70R15C	8PR	112/110	R	6 1/2J	D1060 S1120	450	697	228	9.2
225/75R16C	10PR	121/120	R	6J	D1400 S1450	575	744	223	9.2
235/65R16C	8PR	115/113	R	7J	D1150 S1215	475	712	240	9.2
255/70R15C	6PR	112/110	S	7 1/2J	D1060 S1120	375	739	260	9.7



Winter Tire



GREEN-Max Winter Ice I-15 SUV **New**

Outstanding handling performance

1. Directional grooves design for evacuate snow and mud;
2. Complex soft tread compound and 3D sipes technology to promote handling performance on ice and snow condition.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPg)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/70R15	96	T	6J	710	250	669	209	9.7
215/60R17	96	T	6 1/2J	710	250	690	221	9.7
215/65R16	98	T	6 1/2J	750	250	686	221	9.7
215/75R15	100	T	6J	800	250	703	216	9.7
225/50R18	95	T	7J	690	250	683	233	9.7
225/55R18	98	T	7J	750	250	705	233	9.7
225/55R19	99	T	7J	775	250	731	233	9.7
225/60R16	98	T	6 1/2J	750	250	676	228	9.7
225/60R17	99	T	6 1/2J	775	250	702	228	9.7
225/60R18	100	T	6 1/2J	800	250	727	228	9.7
225/65R17	102	T	6 1/2J	850	250	724	228	9.7
225/65R17 XL	106	T	6 1/2J	950	290	724	228	9.7
235/50R17	96	T	7 1/2J	710	250	668	245	9.7
235/50R18	97	T	7 1/2J	730	250	693	245	9.7
235/50R19	99	T	7 1/2J	775	250	719	245	9.7
235/55R17	99	T	7 1/2J	775	250	690	245	9.7
235/55R18	100	T	7 1/2J	800	250	715	245	9.7
235/55R19 XL	105	H	7 1/2J	925	290	741	245	9.7
235/60R18	103	T	7J	875	250	739	240	9.7
235/60R18 XL	107	T	7J	975	290	739	240	9.7
235/65R17 XL	108	T	7J	1000	290	738	240	10
235/65R18	106	T	7J	950	250	763	240	9.7
235/70R16	106	T	7J	950	250	736	240	9.7
235/75R15	105	T	6 1/2J	925	250	733	235	9.7
245/40R18	93	T	8 1/2J	650	250	653	248	9.7
245/40R20	95	T	8 1/2J	690	250	704	248	9.7
245/45R17	95	T	8J	690	250	652	243	9.7
245/45R18	96	T	8J	710	250	677	243	9.7
245/45R19	98	T	8J	750	250	703	243	9.7
245/45R20	99	T	8J	775	250	728	243	9.7
245/50R18	100	T	7 1/2J	800	250	703	253	9.7
245/50R20	102	T	7 1/2J	850	250	754	253	9.7
245/55R19	103	T	7 1/2J	875	250	753	253	9.7
245/60R18	105	T	7J	925	250	751	248	9.7
245/65R17	107	T	7J	975	250	750	248	9.7
245/70R16	107	H	7J	975	250	750	248	9.7
255/40R18	95	T	9J	690	250	661	260	9.7
255/40R19	96	T	9J	710	250	687	260	9.7
255/45R17	98	T	8 1/2J	750	250	662	255	9.7

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPg)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
255/45R18	99	T	8 1/2J	775	250	687	255	9.7
255/45R19	100	T	8 1/2J	800	250	713	255	9.7
255/45R20	101	T	8 1/2J	825	250	738	255	9.7
255/50R19	103	T	8J	875	250	739	265	9.7
255/50R20 XL	109	H	8J	1030	290	764	265	9.7
255/55R18	105	T	8J	925	250	737	265	9.7
255/55R19	107	T	8J	975	250	763	265	9.7
255/55R20 XL	110	T	8J	1060	290	788	265	9.7
255/60R17	106	T	7 1/2J	950	250	738	260	9.7
255/60R18 XL	112	H	7 1/2J	1120	290	763	260	9.7
265/45R20	104	T	9J	900	250	746	266	9.7
265/45R21	104	T	9J	900	250	771	266	9.7
265/50R19	106	T	8 1/2J	950	250	749	277	9.7
265/50R20	107	T	8 1/2J	975	250	774	277	9.7
265/60R18	110	T	8J	1060	250	775	272	9.7
265/65R17	112	T	8J	1120	250	776	272	9.7
275/35R19	96	T	9 1/2J	710	250	675	278	9.7
275/40R19	101	T	9 1/2J	825	250	703	278	9.7
275/40R20	102	T	9 1/2J	850	250	728	278	9.7
275/45R20 XL	110	T	9J	1060	290	756	273	9.7
275/45R21	107	T	9J	975	250	781	273	9.7
275/50R21 XL	113	T	8 1/2J	1150	290	809	284	9.7
275/55R19	111	T	8 1/2J	1090	250	785	284	9.7
275/55R20	113	T	8 1/2J	1150	250	810	284	9.7
275/65R17	115	T	8J	1215	250	790	279	9.7
275/70R16	114	T	8J	1180	250	792	279	9.7
285/35R20	100	T	10J	800	250	708	290	9.7
285/45R20	108	T	9 1/2J	1000	250	764	285	9.7
285/45R21	109	T	9 1/2J	1030	250	789	285	9.7
285/50R20	112	T	9J	1120	250	794	297	9.7
285/60R18	116	T	8 1/2J	1250	250	799	292	9.7
295/40R21	107	T	10 1/2J	975	250	769	301	9.7
315/35R20	106	T	11J	950	250	728	320	9.7



GREEN-Max Winter Ice I-16 New —

Excellent snow handling and ice braking&acceleration

1. Outstanding grip and traction performance on ice and snow surface;
2. Better braking and acceleration property.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPg)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
145/70R12	69	T	4.50B	325	250	509	150	8.3
165/60R14	75	T	5J	387	250	554	170	8.3
165/70R13	79	T	5.00B	437	250	562	170	8.3
165/70R14	81	T	5J	462	250	588	170	8.3
175/65R15	84	T	5J	500	250	609	177	8.7
175/70R13	82	T	5.00B	475	250	576	177	8.7
175/70R14	84	T	5J	500	250	602	177	8.3
185/55R15	82	T	6J	475	250	585	194	8.7
185/60R14	82	T	5 1/2J	475	250	578	189	8.7
185/60R15	84	T	5 1/2J	500	250	603	189	8.7
185/65R14	86	T	5 1/2J	530	250	596	189	8.7
185/65R15	88	T	5 1/2J	560	250	621	189	8.7
185/70R14	88	T	5 1/2J	560	250	616	189	8.7
195/55R15	85	T	6J	515	250	595	201	8.7
195/60R14	86	T	6J	530	250	590	201	8.7
195/60R15	88	T	6J	560	250	615	201	8.7
195/60R16	89	S	6J	580	250	640	201	8.7
195/65R15	91	T	6J	615	250	635	201	8.7
205/55R16 XL	94	T	6 1/2J	670	290	632	214	8.7
205/60R16	92	T	6J	630	250	652	209	8.7
205/65R15	94	T	6J	670	250	647	209	8.7
215/50R17	91	T	7J	615	250	648	226	8.7
215/55R17	94	T	7J	670	250	668	226	8.7
215/75R14	100	T	6J	800	250	678	216	8.7
225/45R18	91	T	7 1/2J	615	250	659	225	8.7
225/45R19	92	T	7 1/2J	630	250	685	225	8.7
235/45R18	94	T	8J	670	250	669	236	8.7



GREEN-Max Winter UHP

Ultra High performance snow tires with superior handling performance

1. Excellent snow handling performance.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPg)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
185/55R15 XL	86	H	6J	530	290	585	194	8.5
195/50R15	82	H	6J	475	250	577	201	8.5
195/55R15	85	H	6J	515	250	595	201	8.8
195/55R16 XL	91	H	6J	615	290	620	201	8.8
205/45R17 XL	88	V	7J	560	290	616	206	8.8
205/50R17 XL	93	V	6 1/2J	650	290	638	214	8.8
215/45R17 XL	91	V	7J	615	290	626	213	8.8
215/50R17 XL	95	V	7J	690	290	648	226	8.8
215/55R17	94	V	7J	670	250	668	226	8.8
215/60R17	96	H	6 1/2J	710	250	690	221	8.8
225/40R18 XL	92	V	8J	630	290	637	230	8.8
225/45R17 XL	94	V	7 1/2J	670	290	634	225	8.8
225/45R18 XL	95	H	7 1/2J	690	290	659	225	8.8
225/50R17 XL	98	V	7J	750	290	658	233	8.8
225/55R16 XL	99	H	7J	775	290	654	233	8.8
225/55R17 XL	101	V	7J	825	290	680	233	8.8
225/60R16 XL	102	H	6 1/2J	850	290	676	228	8.8
235/45R17 XL	97	H	8J	730	290	644	236	8.8
235/45R18 XL	98	V	8J	750	290	669	236	8.8
235/55R17 XL	103	V	7 1/2J	875	290	690	245	8.8
235/55R18 XL	104	H	7 1/2J	900	290	715	245	8.8
235/55R19 XL	105	V	7 1/2J	925	290	741	245	8.3
235/60R18 XL	107	H	7J	975	290	739	240	8.8
245/40R18 XL	97	V	8 1/2J	730	290	653	248	8.8
245/40R19 XL	98	V	8 1/2J	750	290	679	248	8.3
245/45R18 XL	100	H	8J	800	290	677	243	8.8
245/45R19 XL	102	V	8J	850	290	703	243	8.3
245/45R20 XL	103	H	8J	875	290	728	243	8.8
255/35R19 XL	96	V	9J	710	290	661	260	8.3
255/40R19 XL	100	V	9J	800	290	687	260	8.3
255/45R19 XL	104	H	8 1/2J	900	290	713	255	8.8
255/55R19 XL	111	H	8J	1090	290	763	265	8.8
275/45R20 XL	110	H	9J	1060	290	756	273	8.8
275/40R19 XL	105	V	9 1/2J	925	290	703	278	8.3
275/40R20 XL	106	V	9 1/2J	950	290	728	278	8.3



GREEN-Max Winter HP

High performance snow tires with excellent braking performance

1. Excellent snow braking performance.
2. Comfortably snow driving.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPg)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
155/65R14	75	T	4 1/2J	387	250	558	157	8.2
155/70R13	75	T	4.50B	387	250	548	157	8.2
155/80R13	79	T	4.50B	437	240	578	157	8.2
165/65R14	79	T	5J	437	250	570	170	8.2
165/70R13	79	T	5.00B	437	250	562	170	8.2
165/70R14	81	T	5J	462	250	588	170	8.2
175/65R14 XL	86	H	5J	530	290	584	177	8.2
175/65R15 XL	88	H	5J	560	290	609	177	8.0
175/70R13	82	T	5.00B	475	250	576	177	8.2
175/70R14	84	T	5J	500	250	602	177	8.2
185/60R14	82	T	5 1/2J	475	250	578	189	8.5
185/60R15 XL	88	H	5 1/2J	560	290	603	189	8.5
185/65R14	86	T	5 1/2J	530	250	596	189	8.5
185/65R15 XL	92	H	5 1/2J	630	290	621	189	8.5
195/60R15 XL	92	H	6J	630	290	615	201	8.5
195/65R15 XL	95	T	6J	690	290	635	201	8.5
205/55R16 XL	94	H	6 1/2J	670	290	632	214	8.5
205/60R16 XL	96	H	6J	710	290	652	209	8.5
205/65R15 XL	99	H	6J	775	290	647	209	8.5
205/70R15	96	T	6J	710	250	669	209	8.5
215/55R16 XL	97	H	7J	730	290	642	226	8.5
215/60R16 XL	99	H	6 1/2J	775	290	664	221	8.5
215/65R16	98	H	6 1/2J	750	250	686	221	8.5



GREEN-Max Winter Grip

(Can not sale in CANADA)

Studdable Snow Tire With Outstanding Braking Performance on Ice&snow Condition

1. Designed for ice and snow surface;
2. Directional tread pattern design for excellent snow traction performance;
3. Great grip and handling performance on ice and snow surface.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPg)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
155/70R13	75	T	4.50B	387	250	548	157	9.7
155/80R13	79	T	4.50B	437	240	578	157	9.7
165/70R13	79	Q	5.00B	437	250	562	170	9.7
175/65R14 XL	86	T	5J	530	290	584	177	9.7
175/70R13	82	T	5.00B	475	250	576	177	9.7
185/55R15 XL	86	T	6J	530	290	585	194	9.7
185/60R14	82	T	5 1/2J	475	250	578	189	9.7
185/65R14 XL	90	T	5 1/2J	600	290	596	189	9.7
185/65R15	88	T	5 1/2J	560	250	621	189	9.7
185/70R14 XL	92	T	5 1/2J	630	290	616	189	9.7
195/60R15 XL	92	T	6J	630	290	615	201	9.7
195/65R15 XL	95	T	6J	690	290	635	201	9.7
205/55R16 XL	94	T	6 1/2J	670	290	632	214	9.7
205/60R16 XL	96	T	6J	710	290	652	209	9.7
205/65R15 XL	99	T	6J	775	290	647	209	9.7
215/50R17 XL	95	T	7J	690	290	648	226	9.7
215/55R16 XL	97	T	7J	730	290	642	226	9.7
215/55R17 XL	98	T	7J	750	290	668	226	9.7
215/60R16	95	T	6 1/2J	690	250	664	221	9.7
215/65R16	98	T	6 1/2J	750	250	686	221	9.7
215/70R16 XL	104	T	6 1/2J	900	290	708	221	9.7
225/45R17 XL	94	T	7 1/2J	670	290	634	225	9.7
225/55R17	97	T	7J	730	250	680	233	9.7



GREEN-Max Winter Ice I-15 New

Outstanding handling performance

1. Direction tread pattern design providing excellent handling performance;
2. Directional grooves to help evacuate snow and mud.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPg)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
175/65R14 XL	86	T	5J	530	290	584	177	8.7
185/60R15 XL	88	T	5 1/2J	560	290	603	189	8.7
185/65R15 XL	92	T	5 1/2J	630	290	621	189	8.7
195/55R16 XL	91	T	6J	615	290	620	201	8.7
195/65R15 XL	95	T	6J	690	290	635	201	8.7
205/50R17 XL	93	T	6 1/2J	650	290	638	223	8.7
205/55R16 XL	94	T	6 1/2J	670	290	632	214	8.7
205/60R16 XL	96	T	6J	710	290	652	209	8.7
215/55R16 XL	97	T	7J	730	290	642	226	8.7
215/60R16 XL	99	T	6 1/2J	775	290	664	221	8.7
215/65R16 XL	102	T	6 1/2J	850	290	686	221	8.7
225/45R17 XL	94	T	7 1/2J	670	290	634	225	8.7
225/50R17 XL	98	T	7J	750	290	658	233	8.7
225/55R16 XL	99	T	7J	775	290	654	233	8.7
225/55R17 XL	101	T	7J	825	290	680	233	8.7
235/45R17 XL	97	T	8J	730	290	644	236	8.7



GREEN-Max Winter Van

Excellent snow traction performance

1. Excellent snow traction performance.
2. Focus on driving safety of vehicles in winter.



GREEN-Max Winter Grip^{SUV} (Can not sale in CANADA)

Studdable snow tire with outstanding braking performance on ice&snow condition

1. Designed for ice and snow surface;
2. Excellent snow traction performance with directional tread pattern design;
3. Great grip and handling performance on ice and snow surface;
4. Designed for SUVs.

Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPg)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
225/55R18	98	T	7J	750	250	705	233	9.7
225/65R17 XL	106	T	6 1/2J	950	290	724	228	9.7
235/60R17 XL	106	T	7J	950	290	714	240	9.7
235/65R17 XL	108	T	7J	1000	290	738	240	9.7
255/55R18 XL	109	T	8J	1030	290	737	265	9.7
275/45R20 XL	110	T	9J	1060	290	756	273	9.7
275/55R20 XL	117	T	8 1/2J	1285	290	810	284	9.7
275/60R18 XL	117	T	8J	1285	290	787	279	9.7
265/70R17	115	T	8J	1215	250	804	272	9.7

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
165R13C	6PR	89/88	Q	4.50B	D560 S580	350	594	165	8.2
175R14C	6PR	94/92	Q	5J	D630 S670	350	636	177	8.2
175/75R16C	8PR	101/99	R	5J	D775 S825	475	668	177	9.8
185R14C	8PR	102/100	Q	6J	D800 S850	450	652	189	9.8
185/75R16C	8PR	104/102	R	5J	D850 S900	475	684	184	9.8
195R14C	8PR	106/104	P	5 1/2J	D900 S950	450	666	198	10
195/70R15C	8PR	104/102	R	6J	D850 S900	450	655	201	10.2
195/75R16C	8PR	107/105	R	5 1/2J	D925 S975	475	698	196	10.2
205/75R16C	8PR	110/108	R	5 1/2J	D1000 S1060	475	714	203	10.2
215/75R16C	8PR	113/111	R	6J	D1090 S1150	475	728	216	10.2
225/65R16C	8PR	112/110	R	6 1/2J	D1060 S1120	475	698	228	10
225/70R15LT	8PR	106/103	R	6 1/2J	D875 S950	450	697	228	10.2
225/70R15C	8PR	112/110	R	6 1/2J	D1060 S1120	450	697	228	10.2
225/75R16C	10PR	121/120	R	6J	D1400 S1450	575	744	223	10.2
235/65R16C	10PR	121/119	R	7J	D1360S1450	575	712	240	10