

SPECIALTY TIRE

Agricultural
Tire



Radial Agricultural Tire



Tractor Drive Wheel



LR861

Radial Agricultural Tire

1. Better traction and braking performance.
2. Save work time and fuel.
3. Better running stability.
4. Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)
280/85R24	115/112	A8/B	W9	1215	160	1086	282
320/85R24	122/119	A8/B	W10	1500	160	1154	319
320/85R28	124/121	A8/B	W10	1600	160	1255	319
320/85R32	126/123	A8/B	W10	1700	160	1357	319
320/85R36	142/139	A8/B	W10	2650	400	1357	319
320/85R36	128/125	A8/B	W10	1800	160	1458	319
320/90R46	146/143	A8/B	W10	3000	320	1744	319
320/90R46	148/148	A8/B	W10	3150	360	1744	319
340/85R24	125/122	A8/B	W11	1650	160	1188	343
340/85R28	127/124	A8/B	W11	1750	160	1289	343
340/85R32	142/139	A8/B	W11	2650	360	1391	343
340/85R36	132/129	A8/B	W12	2000	160	1492	343
340/85R38	133/130	A8/B	W11	2060	160	1543	343
380/85R24	131/128	A8/B	W12	1950	160	1256	380
380/85R28	133/130	A8/B	W12	2060	160	1357	380
380/85R30	135/132	A8/B	W12	2180	160	1408	380
380/85R34	137/137	A8/B	W12	2300	160	1510	380
380/85R34	147/147	A8/B	W12	3075	300	1510	380
420/85R24	137/134	A8/B	W13	2300	160	1324	418
420/85R28	139/136	A8/B	W13	2430	160	1425	418
420/85R30	140/137	A8/B	W13	2500	160	1476	418
420/85R34	142/139	A8/B	W13	2650	160	1578	418
420/85R38	144/141	A8/B	W13	2800	160	1679	418
460/85R30	145/142	A8/B	W14L	2900	160	1544	455
460/85R34	147/144	A8/B	W14L	3075	160	1646	455
460/85R38	149/146	A8/B	W14L	3250	160	1747	455
460/85R42	150/147	A8/B	W14L	3350	160	1849	455
460/85R46	152/149	A8/B	W14L	3550	160	1943	464
460/85R46	158/155	A8/B	W14L	4250	240	1943	464
520/85R38	155/152	A8/B	DW16L	3875	160	1849	516
520/85R42	157/154	A8/B	DW16L	4125	160	1951	516
520/85R42	167/164	A8/B	DW16L	5450	240	1951	516
420/80R46	145/142	A8/B	W13A	2900	160	1840	418
420/80R46	151/148	A8/B	W13A	3450	240	1840	418
480/80R42	151/151	A8/B	DW16L	3450	160	1835	479
480/80R42	156/156	A8/B	DW16L	4000	240	1835	479
480/80R46	152/149	A8/B	DW16L	3550	160	1936	479
480/80R46	158/158	A8/B	DW16L	4250	240	1936	479
380/90R46	149/149	A8/B	W12	3250	240	1852	380
380/90R46	157/157	A8/B	W12	4125	360	1852	380
420/90R30	142/139	A8/B	W13	2650	160	1518	418
420/90R30	147/144	A8/B	W13	3075	240	1518	418



LR650

Radial Agricultural Tire

1. Longer service life.
2. Excellent stability and comfort.
3. More efficient traction.
4. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)
440/65R24	128/131	D/A8	W14L	1800	160	1182	441
440/65R28	131/134	D/A8	W14L	1950	160	1283	441
480/65R24	133/136	D/A8	W15L	2060	160	1234	479
480/65R28	136/139	D/A8	W15L	2240	160	1335	479
540/65R24	140/143	D/A8	W18L	2500	160	1312	550
540/65R28	142/145	D/A8	W18L	2650	160	1413	550
540/65R30	150/153	D/A8	W18L	3350	240	1464	550
540/65R34	145/148	D/A8	W18L	2900	160	1566	550
600/65R28	147/150	D/A8	W18L	3075	160	1491	591
600/65R38	153/156	D/A8	W18L	3650	160	1745	591
650/65R38	157/160	D/A8	DW20B	4125	160	1811	645
650/65R42	165/168	D/A8	DW20B	5150	240	1913	645
710/70R38	166/169	D/A8	DW23B	5300	160	1959	716
710/70R42	168/171	D/A8	DW23B	5600	160	2061	716
710/70R42	173/176	D/A8	DW23B	6500	240	2061	716



LR700

Radial Agricultural Tire

1. Saving time and fuel.
2. Better self-cleaning capability.
3. Comfort on the road and in the field.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)
360/70R24	122/119	A8/B	W11	1500	160	1152	357
360/70R24	127/124	A8/B	W11	1750	240	1152	357
380/70R24	125/125	A8/B	W12	1650	160	1190	380
420/70R24	130/127	A8/B	W13	1900	160	1248	418
420/70R24	136/133	A8/B	W13	2240	240	1248	418
420/70R28	133/130	A8/B	W13	2060	160	1349	418
420/70R28	139/136	A8/B	W13	2430	240	1349	418
480/70R24	138/135	A8/B	W15L	2360	160	1316	479
480/70R28	140/137	A8/B	W15L	2500	160	1421	479
480/70R28	145/142	A8/B	W15L	2900	240	1421	479
480/70R28	151/148	A8/B	W15L	3450	320	1421	479
480/70R34	143/143	A8/B	W15L	2725	160	1580	479
480/70R38	145/142	A8/B	W15L	2900	160	1681	479
520/70R38	150/150	A8/B	W16L	3350	160	1749	516
580/70R38	155/155	A8/B	W18L	3875	160	1827	577
580/70R38	170/167	A8/B	W18L	6000	280	1827	577



LR451

Radial Agricultural Tire

1. Increase traction performance.
2. Enhance shoulder wear and cut resistance performance.
3. Enhance tread wear resistance performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)
460/70R24 IND	152/152	A8/B	DW14L	3550	320	1254	455
460/70R24 IND	159/159	A8/B	DW14L	4375	400	1254	455
500/70R24 IND	164/164	A8/B	DW16L	5000	400	1310	503



LR8000

Radial Agricultural Tire

1. Longer service life.
2. Excellent stability and comfort.
3. More efficient traction.
4. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)
800/65R32	167/167	D/A8	DW25B	5450	160	1853	798
800/65R32	172/172	D/A8	DW25B	6300	240	1853	798
800/65R32	178/178	D/A8	DW25B	7500	320	1853	798
800/65R32	181/181	A8/B	DW25B	8250	360	1853	798



LR7000

Radial Agricultural Tire

- 1.Up to 10% load.
- 2.Enhance bead strength.
- 3.Longer service life.
- 4.Excellent stability and comfort.
- 5.More efficient traction.
- 6.Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)
600/70R28	157	D	DW20B	4125	240	1551	591
600/70R28	161/161	A8/B	DW20B	4625	280	1551	591
600/70R30	152	D	DW20B	3550	160	1602	591
600/70R30	158	D	DW20B	4250	240	1602	591



LR9000

Radial Agricultural Tire

- 1.Better soil protection.
- 2.Exceptional load capacity.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)
380/90R50	151/151	A8/B	W12	3450	240	1954	380
380/90R50	160/157	A8/B	W12	4500	400	1954	380



LBI301

Radial Agricultural Tire

- 1.Steel belted.
- 2.Wear and puncture resistance.
- 3.Good grip and self-cleaning performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)
600/50R22.5IMP	159	D	AG20.00	4375	400	1172	611



LR400

Radial Agricultural Tire

- 1.Increase traction performance.
- 2.Enhance shoulder wear and cut resistance performance.
- 3.Enhance tread wear resistance performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)
500/70R24 IND	164/164	A8/B	DW16L	5000	400	1310	503




FL300

Radial Agricultural Tire

- 1.Steel belted
- 2.Wear and puncture resistance.
- 3.Good grip and self-cleaning performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)
560/60R22.5IMP	165	D	AG 16.00	5150	500	1244	543
560/45R22.5IMP	152	D	AG 16.00	3550	400	1076	543
500/60R22.5IMP	155	D	AG 16.00	3875	400	1172	503

Bias Agricultural Tire

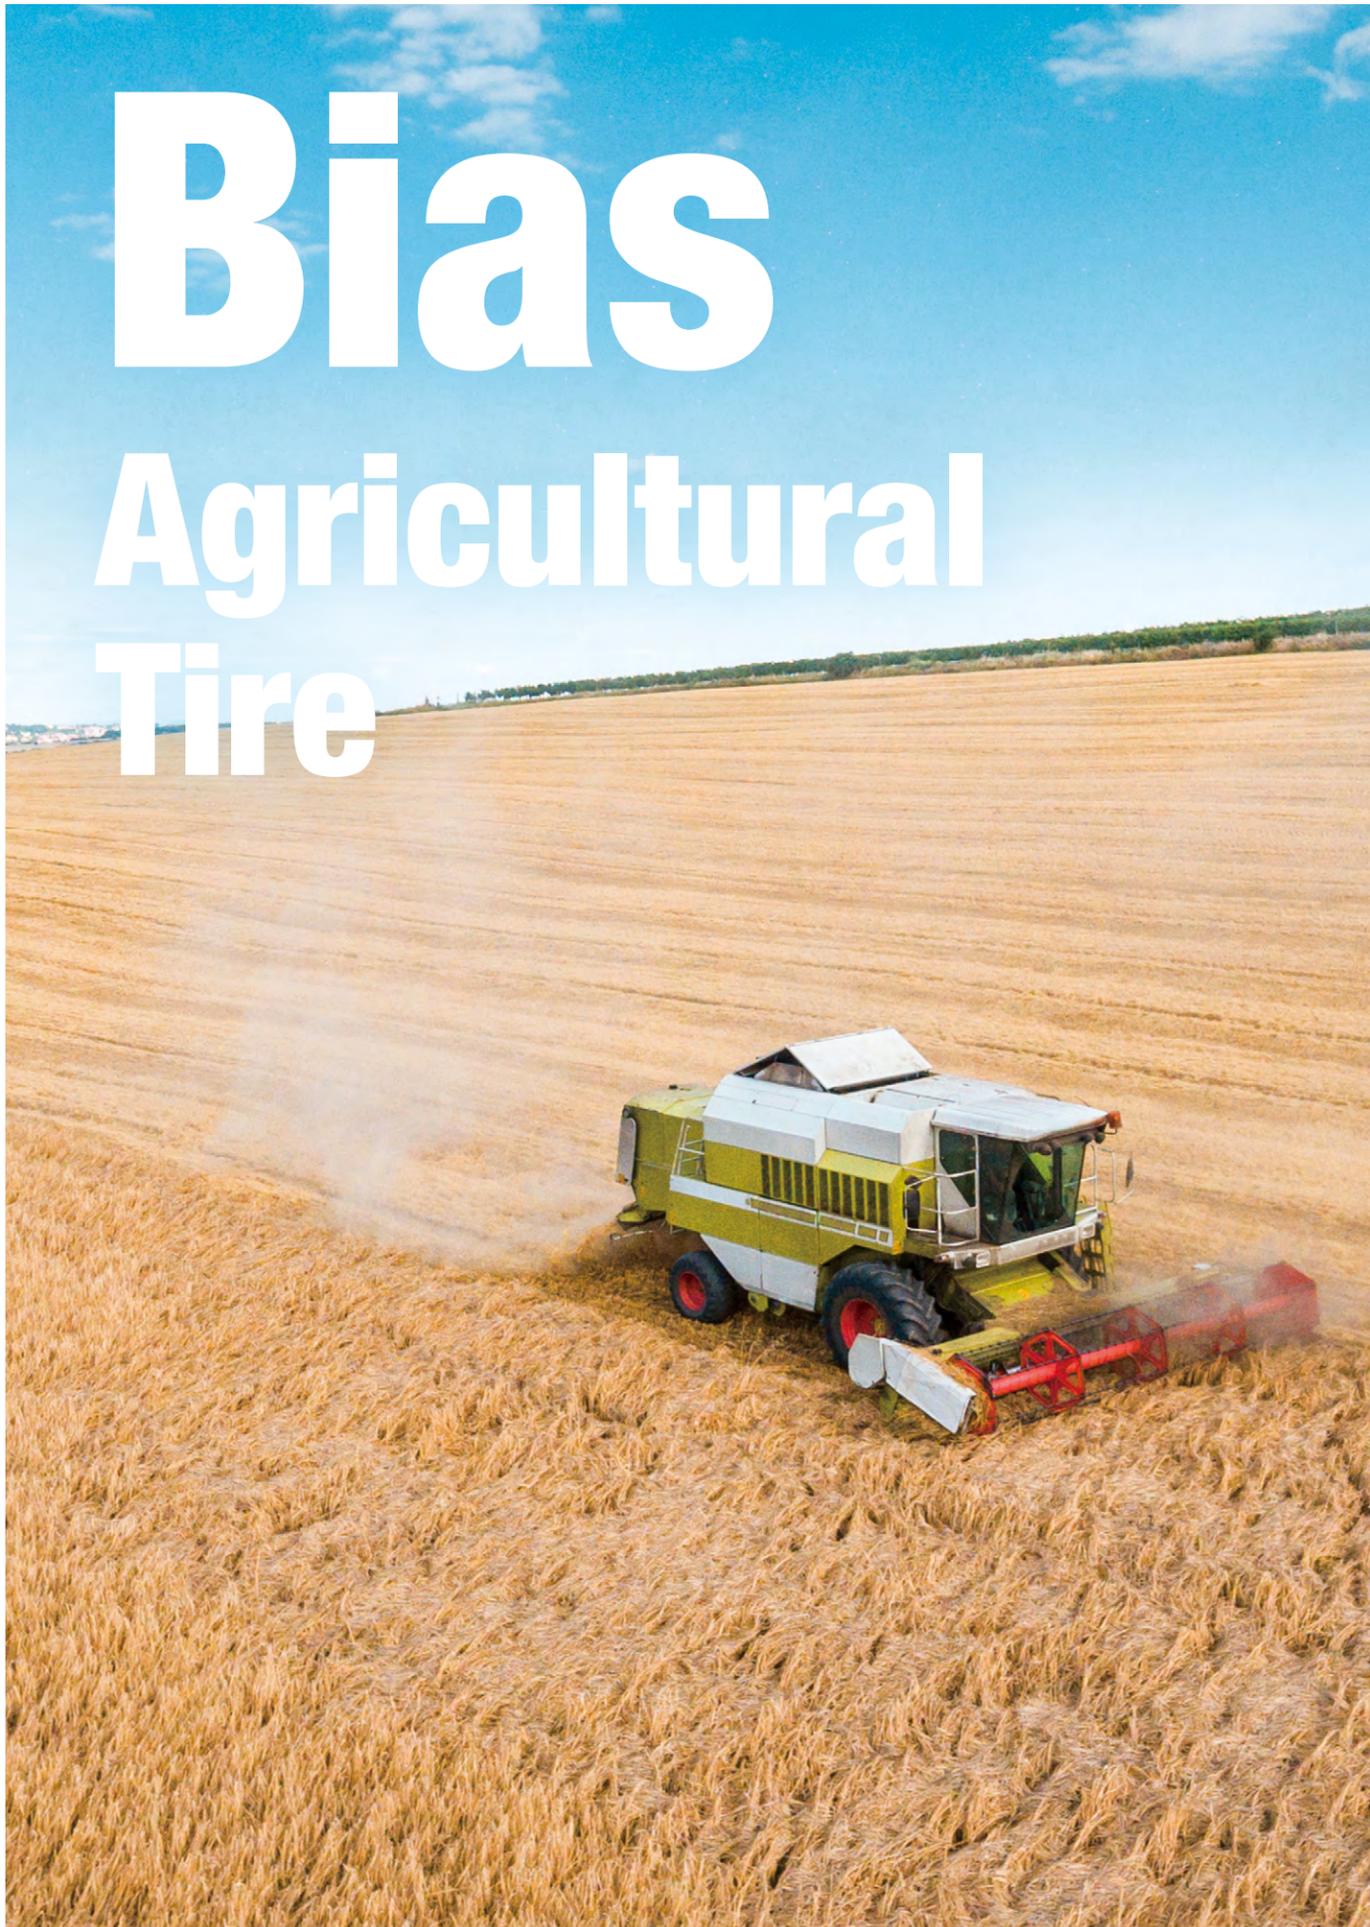

Implement Flotation/Traction



LBI301

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
600/50-22.5IMP	16	169	A6	AG20.00	5770	260	611	1172	25	TL

Tractor Steering Wheel



LL30

Agricultural Tire
 1.Lateral grip and wear resistance.
 2.Good traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.00-12	6	--	A6	3.00D	240	360	110	535	10.0	TT
4.00-14	4	--	A6	3.00D	270	340	110	590	10.0	TT
4.00-14	6	--	A6	3.00D	350	400	110	590	10.0	TT
4.00-16	6	--	A6	3.00D	800	400	110	640	10.0	TT
4.50-14	8	--	A6	3.00D	1000	450	120	602	10.0	TT
4.50-16	6	--	A6	3.00D	615	360	122	655	10.0	TT
4.50-16	8	--	A6	3.00D	1000	450	122	655	10.0	TT
5.00-14	8	--	A6	3.00D	500	450	130	620	12.0	TT
5.00-15	8	--	A6	4.00E	675	450	140	665	10.0	TT
6.00-16	6	--	A6	4.50E	495	250	165	745	13.0	TT
6.50-20	8	--	A6	5.00F	865	420	180	860	16.0	TT



LBF201

Agricultural Tire
 1.Lateral grip and wear resistance.
 2.Good traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
5.50-16	6	--	A6	4.00E	525	370	150	710	15	TT

Tractor Drive Wheel



LL31

Agricultural Tire
 1.Wear and puncture resistance.
 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
5.00-12	4	--	A6	4.00E	280	200	145	590	22.0	TT
5.50-17	6	--	A6	4.00E	440	250	145	750	22.0	TT
6.00-12	4	--	A6	4.50E	335	180	165	640	22.0	TT
6.00-12	6	--	A6	4.50E	405	250	165	640	22.0	TT
6.00-12	8	--	A6	4.50E	420	260	165	640	22.0	TT
6.00-14	6	--	A6	4.50E	450	250	165	690	20.5	TT
6.00-14	8	--	A6	4.50E	685	420	165	690	20.5	TT
6.00-16	6	--	A6	4.50E	495	250	165	745	22.0	TT
7.50-16	6	--	A6	5.50F	650	210	205	810	23.0	TT
7.50-16	8	--	A6	5.50F	700	240	205	810	23.0	TT
7.50-20	6	--	A6	5.50F	760	210	205	910	24.0	TT
7.50-20	8	--	A6	5.50F	880	280	205	910	24.0	TT
8.3-24	6	--	A6	W7	810	240	210	995	30.0	TT
8.3-24	8	--	A6	W7	920	280	210	995	30.0	TT
8.5-20	8	--	A6	W7	880	250	210	895	30.0	TT
9.5-20	8	--	A6	W8	955	280	240	950	30.0	TT
9.5-24	6	--	A6	W8	940	210	240	1050	30.0	TT
9.5-24	8	--	A6	W8	1110	280	240	1050	30.0	TT
10-15	8	--	A6	9.00	950	310	254	775	20.0	TT
11.2-24	6	--	A6	W10	950	180	285	1105	35.0	TT
11.2-24	8	--	A6	W10	1150	250	285	1105	35.0	TT
12-38	8	--	A6	DW11	1570	140	330	1575	35.0	TT
12.4/11-28	6	--	A6	W11	1275	170	315	1260	38.0	TT
12.4/11-28	8	--	A6	W11	1510	230	315	1260	38.0	TT
14.9-24	6	--	A6	W13	1510	140	378	1265	38.0	TT
14.9-24	8	--	A6	W13	1760	180	378	1265	38.0	TT
14.9-28	6	--	A6	W13	1610	140	378	1365	38.0	TT
14.9-28	8	--	A6	W13	1880	180	378	1365	38.0	TT
16.9-34	8	--	A6	W15L	2380	170	430	1585	37.0	TT
16.9-34	10	--	A6	W15L	2605	200	430	1585	37.0	TT



LL32

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
5.50-16	10	--	A6	4.00E	1325	530	150	715	16.0	TT
6.00-16	6	--	A6	4.50E	495	250	165	745	18.0	TT
6.00-16	10	--	A6	4.50E	755	420	165	745	18.0	TT
6.50-16	10	--	A6	5.00F	635	300	180	765	18.0	TT
6.50-16	14	--	A6	5.00F	815	460	180	765	18.0	TT
7.00-16	14	--	A6	5.50F	1010	460	190	785	18.0	TT
7.50-16	10	--	A6	5.50F	800	320	205	810	20.0	TT
7.50-16	14	--	A6	5.50F	1030	460	205	810	20.0	TT



LL46

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
15-24	10	--	A6	DW14	2800	280	410	1330	33.0	TT
16.9-28	8	--	A6	W15L	2175	170	430	1435	39.0	TT
16.9-30	8	--	A6	W15L	2245	170	430	1485	39.0	TT
16.9-30	10	--	A6	W15L	2455	200	430	1485	39.0	TT



LL37

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
7.50-20	6	--	A6	5.50F	760	210	205	910	24.0	TT
7.50-20	8	--	A6	5.50F	880	280	205	910	24.0	TT
910x205	16	--	A6	5.50F	1900	690	205	910	24.0	TT



LL76

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
23.1-26	12	--	--	DW20	3610	170	587	1605	42	TT



LBR102

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
14.9-28	8	--	A6	W13	1880	180	378	1365	37.0	TT



LBR105

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
9.5/10.00-28	8	--	A6	W9	1300	200	275	1245	35	TT



LBR103

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
23.1-26	10	--	A8	DW20	2900	140	587	1605	42	TT
23.1-26	12	--	A6	DW20	3250	170	587	1605	42	TT
23.1-26	14	--	A8	DW20	3550	190	587	1605	42	TT
23.1-30	10	--	A8	DW20	3075	140	587	1707	42	TT
23.1-30	12	--	A8	DW20	3450	170	587	1707	42	TT
23.1-30	16	--	A6	DW20	4120	230	587	1707	42	TT

NEW

Tractor Driving Wheel Paddy Field



R-2

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
19.5L-24	10	--	A6	17.00	2800	170	495	1382	92.0	TT
28L-26	14	--	A6	DW25	4245	170	715	1672	100.0	TT
23.1-26	12	--	A6	DW20	3610	170	587	1662	100.0	TT



PR-1

Agricultural Tire

Special for paddy field.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
6.50-16	6	--	--	5.00F	565	250	165	830	60	TT
7.50-16	8	--	--	5.50F	700	240	195	890	70	TT
8.3-20	8	--	--	W7	760	280	210	950	75	TT
8.3-24	8	--	--	W7	1275	330	210	1050	75	TT
9.5-24	8	--	--	W8	1510	280	240	1150	80.0	TT
11.2-24	8	--	--	W10	1700	270	285	1205	85	TT
11/12.4-28	10	--	--	W11	2050	230	315	1293	90	TT
14.9-30	10	--	--	W13	2190	230	378	1550	90	TT
11-32	8	--	--	W10	1260	210	305	1460	85	TT
16.9-34	10	--	--	W15L	2605	200	430	1685	90	TT

Implement



LL2

Agricultural Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.00-8	4	--	--	3.00D	180	340	110	425	6.5	TT
4.00-8	6	--	--	3.00D	410	420	110	425	6.5	TT
4.00-8	8	--	--	3.00D	700	530	110	425	6.5	TT
4.00-12	6	--	--	3.00D	240	360	112	535	7.5	TT
4.00-14	6	--	--	3.00D	350	400	112	590	8.0	TT
7.00-16	10	--	--	5.50F	1100	530	188	760	12.0	TT
7.00-16	12	--	--	5.50F	1220	630	188	760	12.0	TT
7.00-16	14	--	--	5.50F	1320	730	188	760	12.0	TT



LL14

Agricultural Tire

- 1.Wear resistance and lateral grip.
- 2.Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
5.00-16	8	--	--	3.00D	1200	600	130	655	8.0	TT
5.00-16	10	--	--	3.00D	1350	650	130	655	8.0	TT
5.50-16	8	--	--	4.00E	1100	470	150	685	8.0	TT
6.50-16	10	--	--	5.50F	975	530	185	750	10.5	TT
6.50-16	12	--	--	5.50F	1060	630	185	750	10.5	TT



LL11

Agricultural Tire

- 1.Low rolling resistance.
- 2.Good wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
6.50-16	10	--	--	5.50F	975	530	185	750	10.0	TT
6.50-16	12	--	--	5.50F	1060	630	185	750	10.0	TT
7.00-16	10	--	--	5.50F	1100	530	188	760	12.0	TT
7.00-16	12	--	--	5.50F	1220	630	188	760	12.0	TT
7.00-16	14	--	--	5.50F	1320	730	188	760	12.0	TT



LL15

Agricultural Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.00-16	6	--	--	3.00D	800	400	110	640	8.0	TT
6.00-16	6	--	--	4.50E	635	320	170	730	9.0	TT
6.00-16	8	--	--	4.50E	735	420	170	730	9.0	TT
6.00-16	10	--	--	4.50E	860	530	170	730	9.0	TT
6.50-16	10	--	--	5.50F	975	530	185	750	10.0	TT
6.50-16	12	--	--	5.50F	1060	630	185	750	10.0	TT
7.50-16	14	--	--	6.00G	1500	730	215	805	13.0	TT



LL17

Agricultural Tire

- 1.Low rolling resistance.
- 2.Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.50-14	8	--	--	3.00D	1000	450	120	602	8.0	TT



LL19

Agricultural Tire

- 1.Low noise.
- 2.Fuel saving.
- 3.Good wear resistance.
- 4.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
5.50-14	8	--	--	3.00D	595	390	158	635	9.0	TT



LL21

Agricultural Tire

- 1.Low rolling resistance.
- 2.Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.50-12	8	--	--	3.00B	415	400	127	545	7.0	TT



LL27

Agricultural Tire

Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.50-14	8	--	--	3.00D	1000	450	120	602	8.0	TT
5.50-16	8	--	--	4.00E	1100	470	150	685	8.0	TT
5.50-16	10	--	--	4.00E	1325	530	150	685	8.0	TT



LL29

Agricultural Tire

- 1.Wear resistance and lateral grip.
- 2.Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.50-16	6	--	--	3.00D	615	360	122	655	8.0	TT
4.50-16	8	--	--	3.00D	1000	450	122	655	8.0	TT
4.50-16	10	--	--	3.00D	1325	530	122	655	8.0	TT
5.00-14	8	--	--	3.00D	1200	530	130	620	8.0	TT



LL38

Agricultural Tire

- 1. Wear and puncture resistance.
- 2. Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.50-16	6	--	--	3.00D	615	360	122	655	8.0	TT
4.50-16	8	--	--	3.00D	1000	450	122	655	8.0	TT
4.50-16	10	--	--	3.00D	1325	530	122	655	8.0	TT
5.00-16	8	--	--	4.00E	1200	600	135	680	8.0	TT
5.00-16	10	--	--	4.00E	1350	650	135	680	8.0	TT
5.50-16	8	--	--	4.00E	1100	470	150	685	8.0	TT
5.50-16	10	--	--	4.00E	1325	530	150	685	8.0	TT



Implement Steering/Support



LL82

Agricultural Tire

- 1. Wear and puncture resistance.
- 2. Good grip and traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.00-8	6	--	--	3.00D	410	420	110	425	6.5	TT
4.00-8	8	--	--	3.00D	700	530	110	425	6.5	TT



LL40

Agricultural Tire

- 1. Wear and puncture resistance.
- 2. Good traction.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
10-15	8	--	--	9.00	1240	300	300	775	10.0	TT

Industry Tractor



LBR401

Agricultural Tire

- 1. Wear and puncture resistance.
- 2. Good grip and self-cleaning performance.

NEW

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
8.25-16	12	--	A6	6.50H	D 1360 S 1550	530	235	855	22.0	TT



LL101

Agricultural Tire

- 1. Wear and puncture resistance.
- 2. Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
16.9-28	12	--	A8	W15L	3450	260	429	1410	28.0	TL
19.5L-24	12	--	A6	DW16	3450	230	495	1340	30.0	TL

