



SPECIALTY TIRE

OTR



Radial OTR

OTR | SPECIALTY TIRE 

Dump Truck



LMS401(E-4)

Radial OTR

Exceptional traction

Massive tread blocks characterise this tyre, it delivers excellent tractive performance, better lateral adhesion and more efficient loading for machines working at the face.

Good self cleaning

Flower chime angle changed design, it delivers good self cleaning.

Operating comfort

A wide, square tread gives better stability in loading operations and whilst travelling.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
23.5R25	★★	185	201	19.5/2.5	9250	475	14500	600	1673	597	51.0
26.5R25	★★	193	209	22.00/3.0	11500	475	18500	600	1798	673	56.0
29.5R25	★★	200	216	25.00/3.5	14000	475	22400	600	1921	750	61.0



D0993(E-3/L-3)

Radial OTR (Short Haul)

1. Good traction resistance.

2. Chip, cut and abrasion resistance tread compound.

3. Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	★★★	163	182	8.50	4875	700	8500	950	1300	350	30.0
14.00R24	★★★	169	188	10.00	5800	700	10000	950	1370	375	30.0
14.00R25	★★★	169	188	10.00	5800	700	10000	950	1370	375	30.0



D0993+(E-3/L-3)

Radial OTR(Short Haul)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.,
- 3.Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	★★★	163	182	8.50	4875	700	8500	950	1300	350	28.0
14.00R24	★★★	169	188	10.00	5800	700	10000	950	1370	375	28.0
14.00R25	★★★	169	188	10.00	5800	700	10000	950	1370	375	28.0



LB03S(E-4)

Radial OTR

- 1.High safty.
- 2.Wide contact area with ground provides strong grip.
- 3.Low noise.

Size	Ply Rating	Load Index		Rim	Load Capacity (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
16.00R25	★★	177	195	11.25/2.0	7300	650	12150	800	1548	432	42.0
18.00R25	★★	185	204	13.00/2.5	9250	650	16000	800	1673	498	46.0



LB02S(E-4)

Radial OTR

- 1.Exceptional traction and manoeuvrability.
- 2.Good flotation.
- 3.Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
18.00R33	★★	191	209	13.00/2.5	10900	650	18500	800	1877	498	53.0



LB06S(E-3)

Radial OTR

- 1.Good traction and wear resistance.
- 2.Excellent tear resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
750/65R25	★★	190	209	24.00/3.0	10600	425	18500	625	1610	754	45.0
26.5R25	★★	193	209	22.00/3.0	11500	475	18500	600	1750	673	44.0
29.5R25	★★	200	216	25.00/3.5	14000	475	22400	600	1873	750	44.0

Loader



DM992(E-3/L-3)

Radial OTR

1. Long life.
2. Excellent adhesion and traction in bad conditions.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	★★★	163	182	8.50	4875	700	8500	950	1300	350	26.0
14.00R24	★★★	169	188	10.00	5800	700	10000	950	1370	375	26.0
14.00R25	★★★	169	188	10.00	5800	700	10000	950	1370	375	24.0



DM992+(E-3/L-3)

Radial OTR

1. Long life.
2. Excellent adhesion and traction in bad conditions.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	★★★	163	182	8.50	4875	700	8500	950	1300	350	26.0
14.00R24	★★★	169	188	10.00	5800	700	10000	950	1370	375	26.0



LB01N(E-3/L-3)

Radial OTR

1. Exceptional traction and manoeuvrability.
2. Good flotation.
3. Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
17.5R25	★★	167	182	14.00/1.5	5450	475	8500	600	1348	445	27.0
20.5R25	★★	177	193	17.00/2.0	7300	475	11500	600	1492	520	30.0
23.5R25	★★	185	201	19.50/2.5	9250	475	14500	600	1617	597	33.0
26.5R25	★★	193	209	22.00/3.0	11500	475	18500	600	1750	673	36.0
29.5R25	★★	200	216	25.00/3.5	14000	475	22400	600	1873	750	39.0





LM01N(E-3/L-3)

Radial OTR

1. Exceptional traction and manoeuvrability.
2. Good flotation.
3. Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
23.5R25	★★	185	201	19.5/2.5	9250	475	14500	600	1617	597	30.5



LB02SD(L-5)

Radial OTR

Exceptional traction

Massive tread blocks characterise this tyre;

High Efficiency

The extra deep tread pattern (L5) of this tyre gives outstanding wear life potential. The sidewall/tread intersection design gives an excellent level of damage and cut resistance.

Operating comfort

A wide, square tread gives better stability in loading operations and whilst travelling. A directional pattern.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
20.5R25	★★	177	193	17.00/2.0	7300	475	11500	600	1548	520	71.0
23.5R25	★★	185	201	19.50/2.5	9250	475	14500	600	1673	597	77.5
26.5R25	★★	193	209	22.00/3.0	11500	475	18500	600	1798	673	86.5
29.5R25	★★	200	216	25.00/3.5	14000	475	22400	600	1921	750	94.0

Snow Works



LB03SD(L-5)

Radial OTR

Exceptionally robust in masacre conditions

A substantial crown, robust shoulders reinforced with a protection band make up a tyre particularly resistant to shock ruptures, cuts and tread tearing. A particularly resilient casing with the addition of several specific steel belts constitute a tyre that is very resistant to punctures.

Excellent compromise of adhesion and traction

A very substantial, wide and aggressive tread functions perfectly to produce a good compromise between adhesion, traction and damage resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
17.5R25	★★	167	182	14.00/1.5	5450	475	8500	600	1399	445	64.0
20.5R25	★★	177	193	17.00/2.0	7300	475	11500	600	1548	520	71.0
23.5R25	★★	185	201	19.50/2.5	9250	475	14500	600	1673	597	77.5
26.5R25	★★	193	209	22.00/3.0	11500	475	18500	600	1798	673	86.5
29.5R25	★★	200	216	25.00/3.5	14000	475	22400	600	1921	750	94.0



LSN201 (E-2/L-2)

Radial OTR (SNOW WORKS)

1. Good traction resistance.
2. Chip, cut and abrasion resistance tread compound.
3. Suitable for snow work.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
15.525	★★	160	176	12.00/1.3	4500	475	7100	600	1277	394	25.0
17.525	★★	167	182	14.00/1.5	5450	475	8500	600	1348	445	28.0
20.525	★★	177	193	17.00/2.0	7300	475	11500	600	1492	520	32.0
23.525	★★	185	201	19.50/2.5	9250	475	14500	600	1617	597	33.0
26.525	★★	193	209	22.00/3.0	11500	475	18500	600	1750	673	36.0

Sand



LD702(E-7)

Radial OTR

Suitable for the steer axle of the trucks running on highway

- 1.Excellent grip:the combination of vertical and horizontal pattern groove
- 2.Safety and comfort:strengthened bead area tubeless solution preventing sudden pressure loss.

Size	Ply Rating	Load Index	Speed Symbols	Rim	LOAD CAPACITY (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
24R20.5 (605/70R20.5)	★/16PR	176	F	18.00	7100	600	1370	600	21.0

Mobile Crane



LM11N

Radial OTR

- 1.Exceptional traction and manoeuvrability.
- 2.Good flotation.
- 3.Excellent stability and comfort.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
445/95R25	★★	177	E	11.25/2.0	7300	900	1481	435	23.0
385/95R25	★★	170	E	10.00/1.5	6000	900	1369	379	21.0

OTR | SPECIALTY TIRE



Bias OTR



Dump Truck



EM01(E-3)

OTR Tire

- 1 Deep tread pattern ensure tyre life.
- 2 Wider tread blocks enhance traction performance.
- 3 Special compound design ,low heat-generation,excellent wear and tear resistance.
- 4 Available for large rigid dump trucks.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
14.00-24	24	10.0	9500	850	5150	575	375	1370	34.0	TT	
14.00-24	28	10.0	10000	925	5600	650	375	1370	34.0	TT	
14.00-25	28	10.00/1.5	10000	925	5600	650	375	1370	33.0	TT	



EM02(E-4)

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
21.00-35	40	15.00/3.0	24300	825	14000	625	570	2050	60.0	TL	
24.00-35	42	17.00/3.5	29000	750	16500	550	655	2175	60.0	TL	



EM03(E-4)

OTR Tire

- 1 Deep tread pattern ensure tyre life.
- 2 Wider tread blocks enhance traction performance.
- 3 Special compound design ,low heat-generation,excellent wear and tear resistance.
- 4 Available for large rigid dump trucks.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
12.00-24	24	8.5	7500	975	4125	650	315	1275	40.0	TT	



LL131(E-3)

OTR Tire

- 1.Available for large rigid dump trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
13.00-25	28	8.50	---	---	4800	710	335	1300	24.5	TT	



LL42(E-3)

OTR Tire

- 1.Available for large rigid dump trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
14.00-24	16	10.0	7300	550	4000	375	375	1370	27.0	TT	
14.00-24	24	10.0	9500	850	5150	575	375	1370	27.0	TT	
14.00-24	28	10.0	10000	925	5600	650	375	1370	27.0	TT	
14.00-25	28	10.00/1.5	10000	925	5600	650	375	1370	27.0	TT	
14.00-25	36	10.00/1.5	11050	1100	5500	850	375	1370	27.0	TT	



LL56(E-3)

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
18.00-25	32	13.00/2.5	15000	750	8750	575	500	1615	30.0	TT	
18.00-25	36	13.00/2.5	16000	850	9250	625	500	1615	30.0	TT	



LL90(E-4)

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
18.00-33	32	13.00	17500	750	10000	575	500	1875	50.0	TL	
18.00-33	36	13.00	18500	850	10600	625	500	1875	50.0	TL	
18.00-33	40	13.00	19500	950	11200	700	500	1875	50.0	TL	



LL26/E-3

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
18.00-25	32	13.00/2.5	15000	750	8750	575	500	1615	30.0	TT/TL	
18.00-25	40	13.00/2.5	17000	950	9750	700	500	1615	30.0	TT/TL	



E-4

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
21.00-33	32	15.00/3.0	-	-	10300	500	570	1940	42.0	TL	
21.00-33	42	15.00/3.0	-	-	12400	690	570	1940	42.0	TL	



E-4

OTR Tire

1. Available for large self-dumping trucks.
2. Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
21.00-35	32	15.00/3.0	21200	650	12150	500	570	2050	42.0	TL	
21.00-35	36	15.00/3.0	23000	750	12850	550	570	2050	42.0	TL	
21.00-35	40	15.00/3.0	24300	825	14000	625	570	2050	42.0	TL	




LL25(E-3/L-3)

OTR Tire

1. Available for large rigid dump trucks.
2. Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
16.00-25	28	11.25/2.0	11500	750	6700	575	430	1495	28.5	TT/TL	
16.00-25	32	11.25/2.0	12500	875	7300	650	430	1495	28.5	TT/TL	
16.00-25	36	11.25/2.0	13600	975	7750	725	430	1495	28.5	TT	

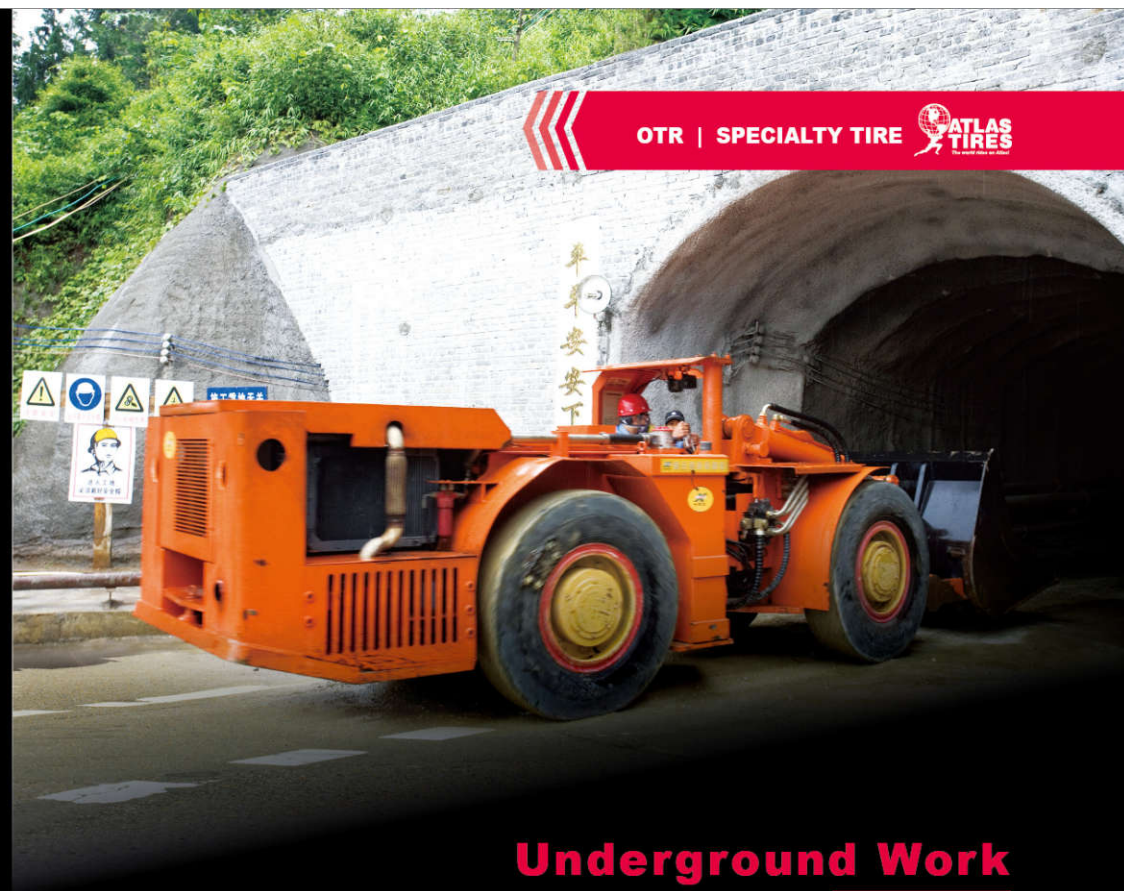

Underground Work



LSM401(L-4S)

OTR Tire

1. Available for loaders operating under seriously tough service conditions in tunnels.
2. Excellent wear and cut resistance.
3. Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
10.00-20	14	—	—	7.5	3260	670	278	1073	35.0	TT
10.00-20	16	—	—	7.5	3535	770	278	1073	35.0	TT



LSM401(L-4S+)

OTR Tire

1. Available for loaders operating under seriously tough service conditions in tunnels.
2. Excellent wear and cut resistance.
3. Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
10.00-20	14	-	-	7.5	3260	670	278	1073	45.0	TT
10.00-20	16	-	-	7.5	3535	770	278	1073	45.0	TT



LSM402

OTR Tire

1. Special tread compound design ,High wear resistance performance.
2. Wide tread arc and deep patten desgin ,increase tyre life.
3. Sole sidewall protection design, Enhance puncture resistance performance.
4. Nonel appearance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
9.00-20	14	-	-	7.0	4375	725	255	1015	35.0	TT
9.00-20	16	-	-	7.0	4750	825	255	1015	35.0	TT
10.00-20	14	-	-	7.5	3260	670	278	1073	45.0	TT
10.00-20	16	-	-	7.5	3535	770	278	1073	45.0	TT
12.00-20	18	-	-	8.5	5800	775	315	1215	55.0	TT
12.00-20	20	-	-	8.5	6150	825	315	1215	55.0	TT
12.00-24	16	-	-	8.5	6150	675	315	1245	55.0	TT
12.00-24	18	-	-	8.5	6500	750	315	1245	55.0	TT
12.00-24	20	-	-	8.5	6900	825	315	1245	55.0	TT
12.00-24	24	-	-	8.5	7500	975	278	1073	55.0	TT
14.00-24	28	-	-	10.0	10000	925	375	1420	65.0	TT
14.00-24	32	-	-	10.0	10900	1050	375	1420	65.0	TT
17.5-25	20	-	-	14.00/1.5	8250	575	395	1350	65.0	TT
17.5-25	32	-	-	14.00/1.5	11700	830	395	1350	65.0	TT
18.00-25	32	-	-	13.00/2.5	15000	750	495	1615	85.0	TL
18.00-25	40	-	-	13.00/2.5	17000	950	495	1615	85.0	TL



LL25(E-3/L-3)

OTR Tire

1. Available for loaders and dozers.
2. Wear and puncture resistance.
3. Wide application.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
15.5-25	12	12.00/1.3	5600	400	3250	250	395	1275	25.0	TL	
17.5-25	12	14.00/15	6150	350	3650	225	445	1350	25.5	TT/TL	
17.5-25	16	14.00/15	7300	475	4250	300	445	1350	25.5	TT/TL	
20.5-25	16	17.00/2.0	8250	350	5450	275	520	1490	28.5	TT/TL	
20.5-25	20	17.00/2.0	9500	450	6000	325	520	1490	28.5	TT/TL	
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT/TL	
23.5-25	18	19.50/2.5	10500	350	6700	275	595	1615	31.5	TT	
23.5-25	20	19.50/2.5	10900	375	7300	300	595	1615	31.5	TT/TL	
23.5-25	24	19.50/2.5	12500	475	8000	350	595	1615	31.5	TT	
26.5-25	20	22.00/3.0	13200	350	8250	250	675	1750	35.0	TT	
26.5-25	24	22.00/3.0	14000	400	9250	300	675	1750	35.0	TL	
26.5-25	28	22.00/3.0	15500	475	10000	350	675	1750	35.0	TT/TL	
29.5-25	28	25.00/3.5	17500	425	11500	325	750	1875	40.0	TL	



LL136(E-3/L-3)

OTR Tire

1. Specialized pattern for sand and other soft surfaces.
2. High side-skid resistance and traction.
3. Excellent in self-cleaning, handling stability and driving comfort.
4. Larger contact area offers even wear and long life.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT	



E-3/L-3

OTR Tyre

- 1.Suitable for heavy loaders used on bad road condition of mine,stone pit and tunnel,etc.
- 2.Good impale and wear resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
29.5-29	28	25.00/3.5	19000	425	12150	325	750	1975	40.0	TL	



LL55(E-3)

OTR Tire

- 1.Available for loaders and dozers.
- 2.Wear and puncture resistance.
- 3.Wide application.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
16/70-20	10	13	4200	325	2400	250	410	1075	20.0	TT	
16/70-20	14	13	5150	450	5150	450	410	1075	20.0	TT	



L301(E-3+)

OTR Tire

- 1.Deepen the pattern design, increase the service life of the tire.
- 2.Large tread pattern block design, uniform tread wear.
- 3.Special mine formula, anti cutting, anti tearing, super abrasion resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
17.5-25	12	14.00/15	6150	350	3650	225	445	1350	36.0	TT	
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	45.0	TT	





LP401(IND-4)

Port Tire

- 1.Extra deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design for ports,low heat-generation,excellent wear and tear resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
14.00-24	28	10.0	14500	1000	13500	1000	375	1420	53.0	TT	
16.00-25	36	11.25/2.0	19700	1000	18400	1000	430	1550	67.0	TL	
18.00-25	40	13.00/2.5	24800	1000	22900	1000	500	1675	72.0	TL	



LP402(IND-3)

Port Tire

- 1.Extra deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design for ports,low heat-generation,excellent wear and tear resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
18.00-25	44	13.00/2.5	26100	1000	24300	1000	500	1675	44.0	TL	
21.00-25	40	15.00/3.0	29310	1000	27290	1000	570	1750	44.0	TL	



Graders



G-2

OTR Tire

- 1.Good steer and traction.
- 2.Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		40km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
13.00-24	12	8.00TG	5600	450	2725	300	335	1280	24.0	TL	
13.00-24	18	8.00TG	6700	675	3500	450	335	1280	24.0	TL	
14.00-24	12	8.00TG	6300	425	3075	275	360	1350	24.0	TT/TL	
14.00-24	16	8.00TG	7300	550	3650	350	360	1350	24.0	TT/TL	



LG201(G-2)

OTR Tire

1. Good steer and traction.
2. Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		40km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
16.00-24	12	11.25/2.5	7100	325	3650	225	430	1490	28.5	TT	
16.00-24	16	11.25/2.5	8250	425	4500	250	430	1490	28.5	TT	
16.00-24	20	11.25/2.5	9250	525	5450	420	430	1490	28.5	TT	



E-2/L-2

OTR Tire

1. Good steer and traction.
2. Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		40km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
15.5-25	12	12.00/1.3	5600	400	3250	250	395	1275	24.0	TL	
17.5-25	12	14.00/1.5	6150	350	3650	225	445	1350	25.5	TT/TL	
17.5-25	16	14.00/1.5	7300	475	4250	300	445	1350	25.5	TT/TL	
20.5-25	16	17.00/2.0	8250	350	5450	275	520	1490	28.5	TT/TL	
20.5-25	20	17.00/2.0	9500	450	6000	325	520	1490	28.5	TT/TL	
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT/TL	
23.5-25	20	19.50/2.5	10900	375	7300	300	595	1615	31.5	TT/TL	
23.5-25	24	19.50/2.5	12500	475	8000	350	595	1615	31.5	TT	



LC101

OTR Tire

1. Available for loaders operating under seriously tough service conditions in tunnels.
2. Excellent wear and cut resistance.
3. Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Rim	10km/h		Section Width (mm)	Overall Diameter (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)			TT	TL
13/80-20	16	9.0	5430	800	325	1045	TT	



LL66A

OTR Tire

1. Available for loaders operating under seriously tough service conditions in tunnels.
2. Excellent wear and cut resistance.
3. Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Rim	10km/h		Section Width (mm)	Overall Diameter (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)			TT	TL
7.50-16	14	6.00G	2390	700	215	810	TT	
12.00-24	16	8.5	6150	675	315	1245	TT	
12.00-24	18	8.5	6500	750	315	1245	TT	
12.00-24	20	8.5	6900	825	315	1245	TT	



LL66B

OTR Tire

1. Available for loaders operating under seriously tough service conditions in tunnels.
2. Excellent wear and cut resistance.
3. Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Rim	10km/h		Section Width (mm)	Overall Diameter (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)			TT	TL
9.00-20	14	7.0	4375	725	255	1015	TT	



LL711

Logging Tire

- 1.Available for logging transport of short haul.
- 2.Good running stability and powerful grip.
- 3.Powerful resistance to wear, cut and attack.
- 4.Good traction.

Size	Ply Rating	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TF
12.00-24	20	8.5	4495	750	315	1275	36.0	TT	



LML401

Logging Tire

- 1.Available for logging transport of short haul.
- 2.Good running stability and powerful grip.
- 3.Powerful resistance to wear, cut and attack.
- 4.Good traction.

Size	Ply Rating	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TF
11.00-20	16	8.0	3350	810	293	1131	32.0	TT	
11.00-20	18	8.0	3650	910	293	1131	32.0	TT	



LD701(E-7)

- 1.Available for gravel road.
- 2.Good delivery performance.
- 3.Low rolling resistance and good heat dissipation.
- 4.Lateral grip.

Size	Ply Rating	Rim	50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
18-20	14	14.00T	4625	360	455	1090	16.0	TT/TL	
20-20	16	14.00T	6000	360	505	1180	17.0	TL	
22-20	14	17.0	4125	280	555	1075	18.0	TL	



LL200

- 1.Available for gravel road.
- 2.Good delivery performance.
- 3.Low rolling resistance and good heat dissipation.
- 4.Lateral grip.

Size	Ply Rating	Rim	65km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
9.00-15	8	5.50F	945	245	235	840	8.0	TT	
9.00-16	8	6.50H	985	245	245	890	8.0	TT	
14.00-20	20	10.00W	2635	345	375	1220	8.5	TT	



D990

Radial OTR

- 1.Good traction and wear resistance.
- 2.Excellent tear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
16.00R20	22PR	174/171	F	11.25	6700/6150	760	1320	438	20.0

SPECIALTY TIRE

AGRICULTURAL TIRE



Radial Agricultural Tire



Agricultural Tire | SPECIALTY TIRE



LR861

Radial Agricultural Tire

1. Better traction and braking performance.
2. Save work time and fuel.
3. Better running stability.
4. Suitable for modern mechanical equipment.

Tractors

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
280/85R24	115/112	A8/B	W9 W10	1215	160	1086	282	39.0
320/85R24	122/119	A8/B	W9 W10 W11	1500	160	1154	319	41.0
320/85R28	124/121	A8/B	W9 W10 W11	1600	160	1255	319	41.0
320/85R32	126/123	A8/B	W9 W10 W11	1700	160	1357	319	41.0
320/85R32	142/139	A8/B	W9 W10 W11	2650	400	1357	319	41.0
320/85R36	128/125	A8/B	W9 W10 W11	1800	160	1458	319	41.0
340/85R24	125/122	A8/B	W11 W12	1650	160	1188	343	42.0
340/85R28	127/124	A8/B	W11 W12	1750	160	1289	343	42.0
340/85R32	142/139	A8/B	W11 W12	2650	360	1391	343	42.0
340/85R36	132/129	A8/B	W11 W12	2000	160	1492	343	42.0
340/85R38	133/130	A8/B	W11 W12	2060	160	1543	343	42.0
380/85R24	131/128	A8/B	W11 W12 W13	1950	160	1256	380	45.0
380/85R28	133/130	A8/B	W11 W12 W13	2060	160	1357	380	45.0
380/85R30	135/132	A8/B	W11 W12 W13	2180	160	1408	380	45.0
380/85R34	137/137	A8/B	W11 W12 W13	2300	160	1510	380	45.0
380/85R34	147/147	A8/B	W11 W12 W13	3075	240	1510	380	45.0
420/85R24	137/134	A8/B	W13 W14L W15L	2300	160	1324	418	48.0
420/85R28	139/136	A8/B	W13 W14L W15L	2430	160	1425	418	48.0
420/85R30	140/137	A8/B	W13 W14L W15L	2500	160	1476	418	48.0
420/85R34	142/139	A8/B	W13 W14L W15L	2650	160	1578	418	48.0
420/85R38	144/141	A8/B	W13 W14L W15L	2800	160	1679	418	48.0
460/85R30	145/142	A8/B	W14L W15L W16L	2900	160	1544	455	51.0
460/85R34	147/144	A8/B	W14L W15L W16L	3075	160	1646	455	51.0
460/85R38	149/146	A8/B	W14L W15L W16L	3250	160	1747	455	51.0
460/85R42	150/147	A8/B	W14L W15L W16L	3350	160	1849	455	51.0
460/85R46	152/149	A8/B	W14L	3550	160	1943	464	51.0
460/85R46	158/155	A8/B	W14L	4250	240	1943	464	51.0
520/85R38	155/152	A8/B	DW16L DW18L	3875	160	1849	516	54.0
520/85R42	157/154	A8/B	DW16L DW18L	4125	160	1951	516	54.0
520/85R42	167/164	A8/B	DW16L DW18L	5450	320	1951	516	54.0
420/80R46	145/142	A8/B	W12 W13	2900	160	1840	418	47.0
420/80R46	151/148	A8/B	W12 W13	3450	240	1840	418	47.0
480/80R42	151/151	A8/B	DD16L DW16L W16L	3450	160	1835	479	49.0
480/80R42	156/156	A8/B	DD16L DW16L W16L	4000	240	1835	479	49.0
480/80R46	158/158	A8/B	DD16L DW16L W16L	4250	240	1936	479	49.0
420/90R30	142/139	A8/B	DW13 W14L	2650	160	1518	418	48.0
420/90R30	147/144	A8/B	DW13 W14L	3075	240	1518	418	48.0
320/90R46(R-1)	146/143	A8/B	W9 W10 W11	3000	320	1744	319	37.0
320/90R46(R-1)	148/148	A8/B	W9 W10 W11	3150	360	1744	319	37.0
380/90R46	149/149	A8/B	W11 W12 W13	3250	240	1852	380	45.0
380/90R46	157/157	A8/B	W11 W12 W13	4125	360	1852	380	45.0



LR650

Radial Agricultural Tire

1. Longer service life.
2. Excellent stability and comfort.
3. More efficient traction.
4. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
440/65R24	128/131	D/A8	W13 W14L W15L	1800	160	1182	441	45.0
440/65R28	131/134	D/A8	W13 W14L W15L	1950	160	1283	441	45.0
480/65R24	133/136	D/A8	W14L W15L	2060	160	1234	479	46.0
480/65R28	136/139	D/A8	W14L W15L	2240	160	1335	479	46.0
540/65R24	140/143	D/A8	W16L W18L	2500	160	1312	550	48.0
540/65R28	142/145	D/A8	W16L W18L	2650	160	1413	550	48.0
540/65R30	150/153	D/A8	W16L W18L	3350	240	1464	550	48.0
540/65R34	145/148	D/A8	W16L W18L	2900	160	1566	550	48.0
540/65R38	153/156	D/A8	W16L W18L	3650	240	1667	550	48.0
600/65R28	147/150	D/A8	DW20B W18L	3075	160	1491	591	52.0
600/65R34	157/160	D/A8	DW20B W18L	4125	240	1644	591	52.0
600/65R38	153/156	D/A8	DW20B W18L	3650	160	1745	591	52.0
650/65R38	157/160	D/A8	DW20B	4125	160	1811	645	56.0
650/65R42	165/168	D/A8	DW20B	5150	240	1913	645	56.0
710/70R38	166/169	D/A8	DW23B	5300	160	1959	716	57.0
710/70R42	168/171	D/A8	DW23B	5600	160	2061	716	57.0
710/70R42	173/176	D/A8	DW23B	6500	240	2061	716	57.0



LR700

Radial Agricultural Tire

1. Saving time and fuel.
2. Better self-cleaning capability.
3. Comfort on the road and in the field.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
360/70R24	122/119	A8/B	W10 W11 W12	1500	160	1152	357	42
360/70R24	127/124	A8/B	W10 W11 W12	1750	240	1152	357	42
380/70R24	125/125	A8/B	W11 W12 W13	1650	160	1190	380	43
420/70R24	130/127	A8/B	W12 W13 W14L	1900	160	1248	418	44
420/70R24	136/133	A8/B	W12 W13 W14L	2240	240	1248	418	44
420/70R28	133/130	A8/B	W12 W13 W14L	2060	160	1349	418	44
420/70R28	139/136	A8/B	W12 W13 W14L	2430	240	1349	418	44
480/70R24	138/135	A8/B	W14L W15L W16L	2360	160	1316	479	47
480/70R28	140/137	A8/B	W14L W15L W16L	2500	160	1421	479	47
480/70R28	145/142	A8/B	W14L W15L W16L	2900	240	1421	479	47
480/70R28	151/148	A8/B	W14L W15L W16L	3450	320	1421	479	47
480/70R34	143/143	A8/B	W14L W15L W16L	2725	160	1580	479	47
480/70R38	145/142	A8/B	W14L W15L W16L	2900	160	1681	479	47
520/70R38	150/150	A8/B	W15L W16L W18L	3350	160	1749	516	48
580/70R38	155/155	A8/B	W18L	3875	160	1827	577	50
580/70R38	170/167	A8/B	W18L	6000	280	1827	577	50

Harvesters



LR8000

Radial Agricultural Tire

1. Longer service life.
2. Excellent stability and comfort.
3. More efficient traction.
4. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
800/65R32	167	D	DW25B DW27B DH27B	5450	160	1853	798	58
800/65R32	172	D	DW25B DW27B DH27B	6300	240	1853	798	58
800/65R32	178	D	DW25B DW27B DH27B	7500	320	1853	798	58
800/65R32	181/181	A8/B	DW25B DW27B DH27B	8250	360	1853	798	58



LR7000

Radial Agricultural Tire

- 1.Up to 10% load
- 2.Enhance bead strength
- 3.Longer service life.
- 4.Excellent stability and comfort.
- 5.More efficient traction.
- 6.Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
600/70R28	157	D	DW18L DW20B W18L	4125	240	1551	591	52.5
600/70R28	161/161	A8/B	DW18L DW20B W18L	4625	280	1551	591	52.5
600/70R30	152	D	DW18L DW20B W18L	3550	160	1602	591	52.5
600/70R30	158	D	DW18L DW20B W18L	4250	240	1602	591	52.5
650/85R38	173/176	D/A8	DW20B DW21B DW23B	6500	240	2071	645	65.0



LR9000

Radial Agricultural Tire

- 1.Radial Agricultural Tire .
- 2.better soil protection.
- 3.Exceptional load capacity.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
380/90R50	151/151	A8/B	W11 W12 W13	3450	240	1954	380	48.0
380/90R50	160/157	A8/B	W11 W12 W13	4500	400	1954	380	48.0

Sparyers



LR861

Radial Agricultural Tire

- 1.Better traction and braking performance.
- 2.Save work time and fuel.
- 3.Better running stability.
- 4.Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
320/90R46(R-1)	146/143	A8/B	W9 W10 W11	3000	320	1744	319	37.0
320/90R46(R-1)	148/148	A8/B	W9 W10 W11	3150	360	1744	319	37.0
340/85R38	133/130	A8/B	W11 W12	2060	160	1543	343	42.0
380/90R46	149/149	A8/B	W11 W12 W13	3250	240	1852	380	45.0
380/90R46	157/157	A8/B	W11 W12 W13	4125	360	1852	380	45.0

Trailers



LBI301

Radial Agricultural Tire

- 1.STEEL BELTED
- 2.Wear and puncture resistance.
- 3.Good grip and self-cleaning performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
600/50R22.5	159	D	AG20.00	4375	400	1172	611	25.0
650/65R30.5	176	D	AG20.00	7100	400	1621	645	27.0
850/50R30.5	182	D	AG28.00	8500	400	1625	862	27.0



FL300

Radial Agricultural Tire

1. STEEL BELTED
2. Wear and puncture resistance.
3. Good grip and self-cleaning performance.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
500/60R22.5	155	D	AG16.00	3875	400	1172	503	18.0
560/60R22.5	165	D	AG16.00 16.00 17.00 AG20.00	5150	500	1244	543	18.0
560/45R22.5	152	D	AG16.00	3550	400	1076	543	18.0
600/55R26.5	165	D	AG20.00	5150	400	1333	611	20.0
650/55R26.5	169	D	AG20.00	5800	400	1389	645	24.0
710/50R26.5	170	D	AG20.00 AG24.00	6000	400	1383	727	24.0
710/50R30.5	173	D	AG20.00 AG24.00	6500	400	1485	727	26.0



LR451

Radial Agricultural Tire

1. Increase traction performance.
2. Enhance shoulder wear and cut resistance performance.
3. Enhance tread wear resistance performance.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
460/70R24 IND	152/152	A8/B	DW14L DW15L DW16L	3550	320	1254	455	32.0
460/70R24 IND	159/159	A8/B	DW14L DW15L DW16L	4375	400	1254	455	32.0
500/70R24 IND	164/164	A8/B	DW16L DW15L	5000	400	1302	511	28.0



LR400

Radial Agricultural Tire

1. Increase traction performance.
2. Enhance shoulder wear and cut resistance performance.
3. Suitable for loaders and backhoe loaders.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
500/70R24 IND	164/164	A8/B	DW16L DW15L	5000	400	1302	511	28.0
400/70R18 IND	147/147	A8/B	13.00	3075	400	1017	404	23.0
400/70R20 IND	149/149	A8/B	13.00	3250	400	1088	404	23.0



LR400

Radial Agricultural Tire

1. Increase traction performance.
2. Enhance shoulder wear and cut resistance performance.
3. Suitable for loaders and backhoe loaders.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
405/70R18	141/153	B/A2	13	2575	380	1025	407	23.0
405/70R20	143/155	B/A2	13	2725	380	1076	407	23.0



Bias Agricultural Tire



Agricultural Tire | SPECIALTY TIRE



Tractor Steering Wheel



LL30

Agricultural Tire

1. Lateral grip and wear resistance.
2. Good traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
4.00-12	6	---	A6	3.00D	240	360	110	535	10.0	TT
4.00-14	4	---	A6	3.00D	270	340	110	590	10.0	TT
4.00-14	6	---	A6	3.00D	350	400	110	590	10.0	TT
4.00-16	6	---	A6	3.00D	800	400	110	640	10.0	TT
4.50-14	8	---	A6	3.00D	1000	450	120	602	10.0	TT
4.50-16	6	---	A6	3.00D	615	360	122	655	10.0	TT
4.50-16	8	---	A6	3.00D	1000	450	122	655	10.0	TT
5.00-14	8	---	A6	3.00D	500	450	130	620	12.0	TT
5.00-15	8	---	A6	4.00E	675	450	140	665	10.0	TT
6.00-16	6	---	A6	4.50E	495	250	165	745	13.0	TT
6.50-20	8	---	A6	5.00F	865	420	180	860	16.0	TT



LBF201

Agricultural Tire

1. Lateral grip and wear resistance.
2. Good traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
5.50-16	6	---	A6	4.00E	525	370	150	710	15.0	TT



Tractor Drive Wheel

LL31

Agricultural Tire

1. Wear and puncture resistance.
2. Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
5.00-12	4	---	A6	4.00E	280	200	145	590	22.0	TT TL
5.50-17	6	---	A6	4.00E	440	250	145	750	22.0	TT
6.00-12	4	---	A6	4.50E	335	180	165	640	22.0	TT
6.00-12	6	---	A6	4.50E	405	250	165	640	22.0	TT
6.00-12	8	---	A6	4.50E	420	260	165	640	22.0	TT
6.00-14	6	---	A6	4.50E	450	250	165	690	20.5	TT
6.00-14	8	---	A6	4.50E	685	420	165	690	20.5	TT
6.00-16	6	---	A6	4.50E	495	250	165	745	22.0	TT
7.50-16	6	---	A6	5.50F	650	210	205	810	23.0	TT
7.50-16	8	---	A6	5.50F	700	240	205	810	23.0	TT
7.50-20	6	---	A6	5.50F	760	210	205	910	24.0	TT
7.50-20	8	---	A6	5.50F	880	280	205	910	24.0	TT
8.3-24	6	---	A6	W7	810	240	210	995	30.0	TT
8.3-24	8	---	A6	W7	920	280	210	995	30.0	TT
8.5-20	8	---	A6	W7	880	250	210	895	30.0	TT
9.5-20	8	---	A6	W8	955	280	240	950	30.0	TT
9.5-24	6	---	A6	W8	940	210	240	1050	30.0	TT
9.5-24	8	---	A6	W8	1110	280	240	1050	30.0	TT
10-15	8	---	A6	9.00	950	310	254	775	20.0	TT
11.2-24	6	---	A6	W10	950	180	285	1105	35.0	TT
11.2-24	8	---	A6	W10	1150	250	285	1105	35.0	TT
12-38	8	---	A6	DW11	1570	140	330	1575	35.0	TT
12.4/11-28	6	---	A6	W11	1275	170	315	1260	38.0	TT
12.4/11-28	8	---	A6	W11	1510	230	315	1260	38.0	TT
14.9-24	6	---	A6	W13	1510	140	378	1265	38.0	TT
14.9-24	8	---	A6	W13	1760	180	378	1265	38.0	TT
14.9-28	6	---	A6	W13	1610	140	378	1365	38.0	TT
14.9-28	8	---	A6	W13	1880	180	378	1365	38.0	TT
16.9-34	8	---	A6	W15L	2380	170	430	1585	37.0	TT
16.9-34	10	---	A6	W15L	2605	200	430	1585	37.0	TT



LL32

Agricultural Tire

1. Wear and puncture resistance.
2. Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
5.50-16	10	---	A6	4.00E	1325	530	150	715	16.0	TT
6.00-16	6	---	A6	4.50E	495	250	165	745	18.0	TT
6.00-16	10	---	A6	4.50E	755	420	165	745	18.0	TT
6.50-16	10	---	A6	5.00F	635	300	180	765	18.0	TT
6.50-16	14	---	A6	5.00F	815	460	180	765	18.0	TT
7.00-16	14	---	A6	5.50F	1010	460	190	785	18.0	TT
7.50-16	10	---	A6	5.50F	800	320	205	810	20.0	TT
7.50-16	14	---	A6	5.50F	1030	460	205	810	20.0	TT





LL37

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
7.50-20	6	---	A6	5.50F	760	210	205	910	24.0	TT
7.50-20	8	---	A6	5.50F	880	280	205	910	24.0	TT
910x205	16	---	A6	5.50F	1900	690	205	910	24.0	TT



LL46

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
15-24	10	---	A6	DW14	2800	280	410	1330	33.0	TT
16.9-28	8	---	A6	W15L	2175	170	430	1435	39.0	TT
16.9-30	8	---	A6	W15L	2245	170	430	1485	39.0	TT
16.9-30	10	---	A6	W15L	2455	200	430	1485	39.0	TT



LL76

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
23.1-26-12PR	12	---	---	DW20	3610	170	587	1605	42	TT



LBR102

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
14.9-28	8	-	A6	W13	1880	180	378	1365	37.0	TT



LBR105

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
9.5/10.00-28	8	-	A6	W9	1300	200	275	1245	35.0	TT



LBR103

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
23.1-26	10	-	A8	DW20	2900	140	587	1605	42	TT
23.1-26	12	-	A6	DW20	3250	170	587	1605	42	TT
23.1-26	14	-	A8	DW20	3550	190	587	1605	42	TT
23.1-30	10	-	A8	DW20	3075	140	587	1707	42	TT
23.1-30	12	-	A8	DW20	3450	170	587	1707	42	TT
23.1-30	16	-	A6	DW20	4120	230	587	1707	42	TT

Tractor Driving Wheel Paddy Field



R-2

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
										TT TL
19.5L-24	10	---	A6	17.00	2800	170	495	1382	92.0	TT
28L-26	14	---	A6	DW25	4245	170	715	1672	100.0	TT
23.1-26	12	---	A6	DW20	3610	170	587	1662	100.0	TT



PR-1

Agricultural Tire

Special for paddy field.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
										TT TL
6.50-16	6	-	-	5.00F	565	250	165	830	60.0	TT
7.50-16	8	-	-	5.50F	700	240	195	890	70.0	TT
8.3-20	8	-	-	W7	760	280	210	950	75.0	TT
8.3-24	8	-	-	W7	1275	330	210	1050	75.0	TT
9.5-24	8	-	-	W8	1510	280	240	1150	80.0	TT
11.2-24	8	-	-	W10	1700	270	285	1205	85.0	TT
11/12.4-28	10	-	-	W11	2050	230	315	1293	90.0	TT
14.9-30	10	-	-	W13	2190	230	378	1415	90.0	TT
11-32	8	-	-	W10	1260	210	305	1460	85.0	TT
16.9-34	10	-	-	W15L	2805	200	430	1585	90.0	TT



LL2

Agricultural Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
										TT TL
4.00-8	4	---	---	3.00D	180	340	110	425	6.5	TT
4.00-8	6	---	---	3.00D	410	420	110	425	6.5	TT
4.00-8	8	---	---	3.00D	700	530	110	425	6.5	TT
4.00-12	6	---	---	3.00D	240	360	112	535	7.5	TT
4.00-14	6	---	---	3.00D	350	400	112	590	8.0	TT
7.00-16	10	---	---	5.50F	1100	530	188	760	12.0	TT
7.00-16	12	---	---	5.50F	1220	630	188	760	12.0	TT
7.00-16	14	---	---	5.50F	1320	730	188	760	12.0	TT



LL11

Agricultural Tire

- 1.Low rolling resistance.
- 2.Good wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
										TT TL
6.50-16	10	---	---	5.50F	975	530	185	750	10.0	TT
6.50-16	12	---	---	5.50F	1060	630	185	750	10.0	TT
7.00-16	10	---	---	5.50F	1100	530	188	760	12.0	TT
7.00-16	12	---	---	5.50F	1220	630	188	760	12.0	TT
7.00-16	14	---	---	5.50F	1320	730	188	760	12.0	TT



LL14

Agricultural Tire

1. Wear resistance and lateral grip.
2. Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
5.00-16	8	---	---	3.00D	1200	600	130	655	8.0	TT
5.00-16	10	---	---	3.00D	1350	650	130	655	8.0	TT
5.50-16	8	---	---	4.00E	1100	470	150	685	8.0	TT
6.50-16	10	---	---	5.50F	975	530	185	750	10.5	TT
6.50-16	12	---	---	5.50F	1060	630	185	750	10.5	TT



LL15

Agricultural Tire

1. Wear and crack resistance.
2. Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
4.00-16	6	---	---	3.00D	800	400	110	640	8.0	TT
6.00-16	6	---	---	4.50E	635	320	170	730	9.0	TT
6.00-16	8	---	---	4.50E	735	420	170	730	9.0	TT
6.00-16	10	---	---	4.50E	860	530	170	730	9.0	TT
6.50-16	10	---	---	5.50F	975	530	185	750	10.0	TT
6.50-16	12	---	---	5.50F	1060	630	185	750	10.0	TT
7.50-16	14	---	---	6.00G	1500	730	215	805	13.0	TT



LL17

Agricultural Tire

1. Low rolling resistance.
2. Good wear and crack resistance.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
4.50-14	8	---	---	3.00D	1000	450	120	602	8.0	TT



LL19

Agricultural Tire

1. Low noise.
2. Fuel saving.
3. Good wear resistance.
4. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
5.50-14	8	---	---	3.00D	595	390	158	635	9.0	TT



LL21

Agricultural Tire

1. Low rolling resistance.
2. Good wear and crack resistance.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
4.50-12	8	---	---	3.00B	415	400	127	545	7.0	TT



LL27

Agricultural Tire

Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
4.50-14	8	---	---	3.00D	1000	450	120	602	8.0	TT
5.50-16	8	---	---	4.00E	1100	470	150	685	8.0	TT
5.50-16	10	---	---	4.00E	1325	530	150	685	8.0	TT



LL38

Agricultural Tire

1.Wear and puncture resistance.
2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
4.50-16	6	---	---	3.00D	615	360	122	655	8.0	TT
4.50-16	8	---	---	3.00D	1000	450	122	655	8.0	TT
4.50-16	10	---	---	3.00D	1325	530	122	655	8.0	TT
5.00-16	8	---	---	4.00E	1200	600	135	680	8.0	TT
5.00-16	10	---	---	4.00E	1350	650	135	680	8.0	TT
5.50-16	8	---	---	4.00E	1100	470	150	685	8.0	TT
5.50-16	10	---	---	4.00E	1325	530	150	685	8.0	TT



LL29

Agricultural Tire

Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
4.50-16	6	---	---	3.00D	615	360	122	655	8.0	TT
4.50-16	8	---	---	3.00D	1000	450	122	655	8.0	TT
4.50-16	10	---	---	3.00D	1325	530	122	655	8.0	TT
5.00-14	8	---	---	3.00D	1200	530	130	620	8.0	TT



LL82

Agricultural Tire

1.Wear and puncture resistance.
2.Good grip and traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
4.00-8	6	---	---	3.00D	410	420	110	425	6.5	TT
4.00-8	8	---	---	3.00D	700	530	110	425	6.5	TT

Implement Steering/support



LL40

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good traction.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
10-15	8	---	---	9.00	1240	300	300	775	10.0	TT TL

Industry Tractor



LBR401

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
8.25-16	12	---	A6	6.50H	D1360 S1550	530	235	855	22.0	TT TL

Implement Flotation/traction



LBI301

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
600/50-22.5IMP	16	169	A6	AG20.00	5770	260	611	1172	25.0	TL



LL101

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
16.9-28	12	---	A8	W15L	3450	260	429	1410	28.0	TL
19.5L-24	12	---	A6	DW16	3450	230	495	1340	30.0	TL